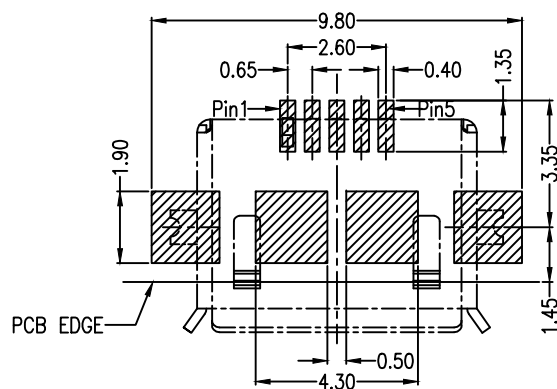
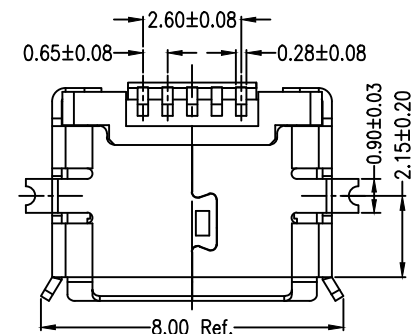
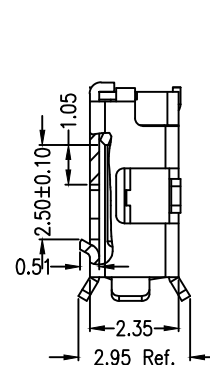
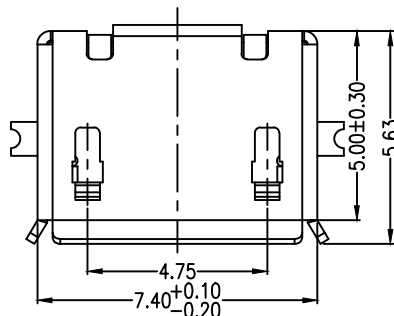


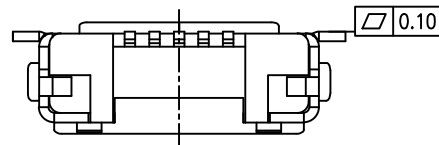



Notes:

Specifications:

- 1). Current rating: 1 A Max.
- 2). Dielectric withstanding: voltage: 100 V(ac) for 1 min.
- 3). Contact resistance: 50 mW Max.
- 4). Insulation resistance: 100 MW Min.
- 5). Total mating force: 3.57 Kgf Max.
- 6). Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min
- 7). Temperature range: -30°C~+80°C

RECOMMENDED PCB LAYOUT

3	SHELL	C2680	T=0.25	NICKEL PLATED OVERALL	1
2	TERMINAL	C2680	T=0.20	Sn 80U*+ Au G/F	5
1	HOUSING	LCP	—	BLACK UL94-V0	1
NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.38	x.°	± 3°		Micro USB 5 Pin Female Connector AB SMT Type		
x.x	= ± 0.30	.x°	± 2°				
x.xx	= ± 0.25	.xx°	± 1°				
x.xxx	= ± 0.10	.xxx°	± 0.5°	UNIT mm			
DRAWN	Angel	DATE	2012/01/10	PART NO.	MCUSB-S05T23		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0