
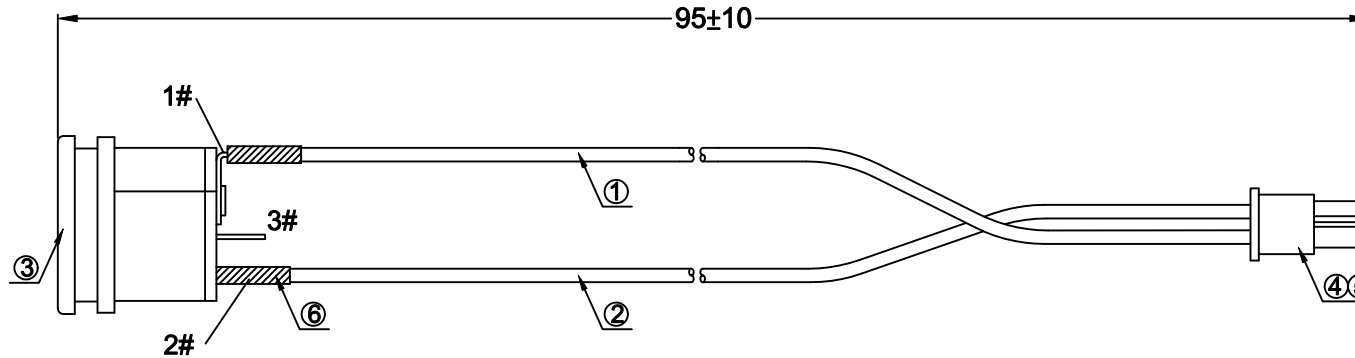



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/07/18	

DC POWER JACK



2P HOUSING



NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 1ohm MAX.

PIN ASSIGNMENT

P1		P2
1 — RED	—————	2
2 — BLACK	—————	1

ITEM	QTY	PART NUMBER	DESCRIPTION
6	2		BLACK HEAT SHRINK TUBE.
5	2	B0264	TERMINAL: PITCH 3.0MM TIN PLATED. (JS-3025-T)
4	1		HOUSING: PITCH 3.0MM 2P. (JS-3025S-02)
3	1		DC POWER JACK. (SCD525CCS000B00G)
2	1	F0071	JUMP WIRE: 22AWG BLACK UL1007.
1	1	F0070	JUMP WIRE: 22AWG RED UL1007.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE				
CHECK, BY	<i>Bao jiawei</i>	REV	A	DC POWER JACK/2P HOUSING				
APP, BY	<i>Mr. Huang</i>	DATE	2014/07/18	TOLERANCES				
DWG NO.	SE-S-0142			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	EH1058382			SHEET	1/1	SIZE	A4	