

4			
REV.	ECN	DESCRIPTION	APPROVED
A			

規格說明: Specifications:

電氣特性: Electrical:

- 1.額定電流: Current Rating
1.0A/contact terminal
- 2.額定電壓: Voltage Rating
30V DC
- 3.接觸阻抗: Contact Resistance
50 mohms MAX
- 4.耐電壓: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 5.絕緣阻抗: Insulation Resistance:
100 Mohms MIN

原材料: Material:

- 1.塑膠: Housing:
High Temperature Thermoplastics,
UL 94V-0 LCP Black
- 2.端子: Contact: Cooper Alloy C2680
- 3.外殼: Shell: Copper Alloy C2680

電鍍: Finish:

- 1.端子: Contact: Plated Gold Flash in Mating Area,
Tin On Solder Talls
2. 外殼: Shell:
Nickel Plating

Part No. Information:

USB-S2126.12010.XX200-AVY

Packing:






- 0= Tray
- 1= Tube
- 2= Tape&Reel with Mylar
- 3= Tape&Reel W/O Mylar

FINISH:

- 1=Gold Fu" 半金
- 2=Gold 3u" 半金
- 3=Gold 5u" 半金
- 4=Gold 6u" 半金
- 5=Gold 10u" 半金
- 6=Gold 15u" 半金
- 7=Gold 30u" 半金



RECOMMENDED PCB LAYOUT

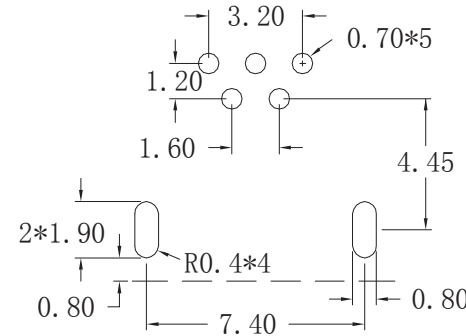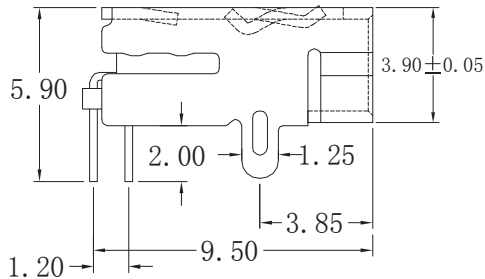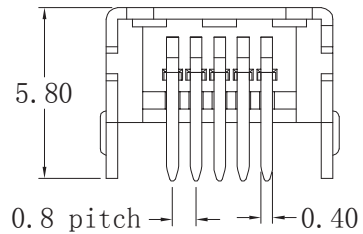

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x.x	± 0.35	.x°	± 3°	Mini USB 5 Pin Female Connector 90 Degree B Type 2B-2D			
x.xx	± 0.25	.xx°	± 2°				
x.xxx	± 0.15	.xxx°	± 1°				
DRAWN	PING U	DATE	2011/02/23	PART NO.	USB-S2126.12010.XX200		
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A