
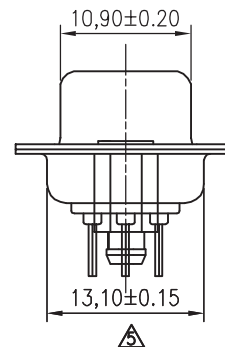


A型铆合 B型后铆空心/实心 C型前铆空心/实心 D型锁小螺母 E型铆圆螺母 F型铆铜套

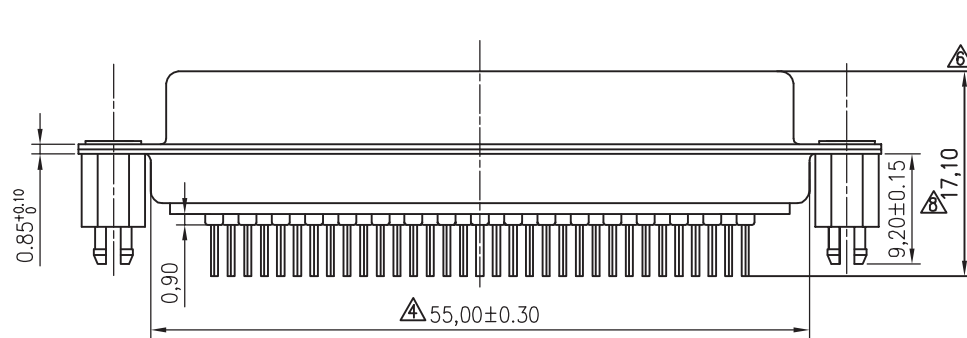

MATERIAL:

1. Insulator: PBT+30%Glass Fiber (UL94V-0)
2. Contact: Brass
3. Contact Plated: Gold Flash over Nickel
4. Shell: Steel, Nickel Plated


SPECIFICATION:

1. Current Rating: 2 AMPS
2. Insulation Resistance: 1000MΩ MIN. AT 500VDC
3. Dielectric Strength: 500V for five second
4. Operation Temperature: -55°C~+105°C

HOW TO ORDER

DSUB- S50 - S - X - X - 2 - X - X

PIN数规格 50:50Pin S:母头 颜色规格 B:兰色 K:黑色 W:白色 端子电镀 1:半金1u" 2:半金3u" 3:半金5u" 4:半金10u" 5:半金15u" 6:半金30u" X:无铆钉 铁壳电镀 A:前镍后锡8H B:前镍后锡12H C:前镍后锡24H D:前镍后锡48H E:前镍后锡72H F:前金后锡 G:前金后金 2:传统

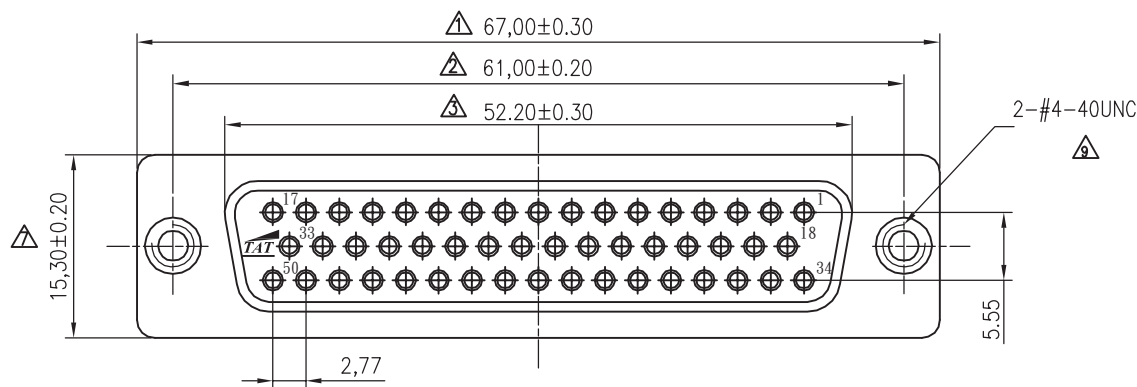

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x	= ± 0.38	.x°	± 1.0°		D-SUB HD 50 Pin Female Connector Straight Solder Type		
x.xx	= ± 0.20	.xx°	± 0.5°				
x.xxx	= ± 0.10	.xxx°	± 0.1°				
DRAWN		DATE		PART NO.	DSUB-S50-S-X-X-2-X-X		
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A