

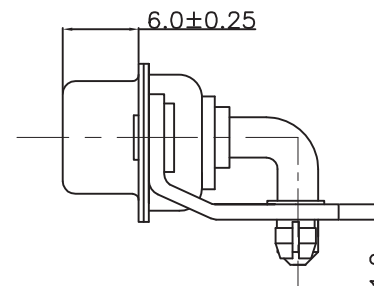
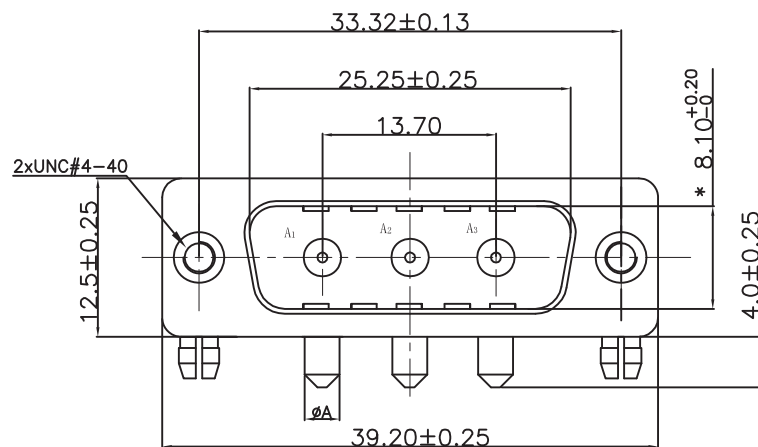


“*” Pivot Dimension

RoHS Component

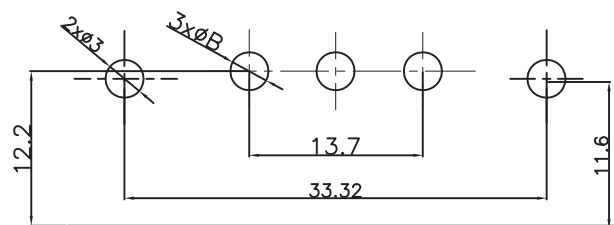

PO(X)	电流强度(A)	øA	PCB øB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

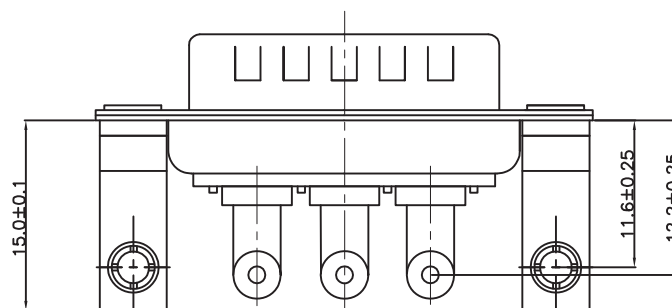

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED

BRACKET MATERIAL: BRASS; Ni FINISHED

HIGH FREQUENCY CONTACT MATERIAL: BRASS, 3U"~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,30,OR 40 AMPS

HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

Seconn Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.25	x.°	± 2.0°		D-SUB connector Power 3W3 male Angled Type with bracket		
x.x	= ± 0.10	.x°	± 0.5°				
x.xxx	= ± 0.05						
DRAWN	DM Yang	DATE	2009/09/15	PART NO.	DSUB-SP03W3MR04X00		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A