




“*” Pivot Dimension

RoHS Component

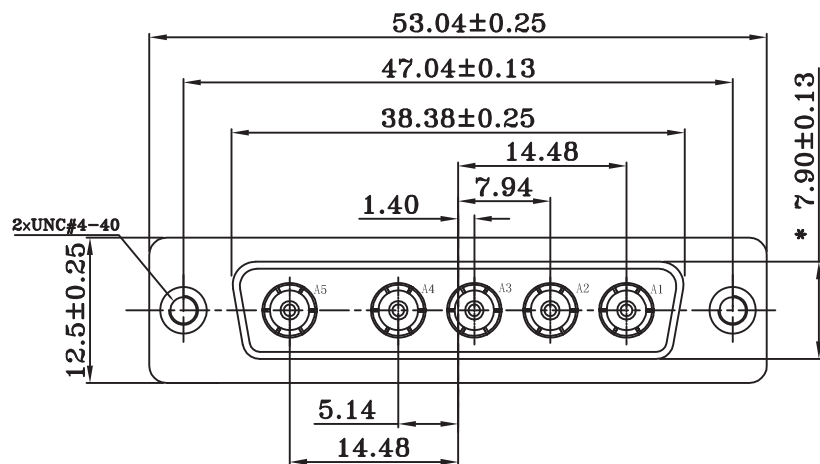

PO(X)	电流强度(A)	∅A	PCB ∅B
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

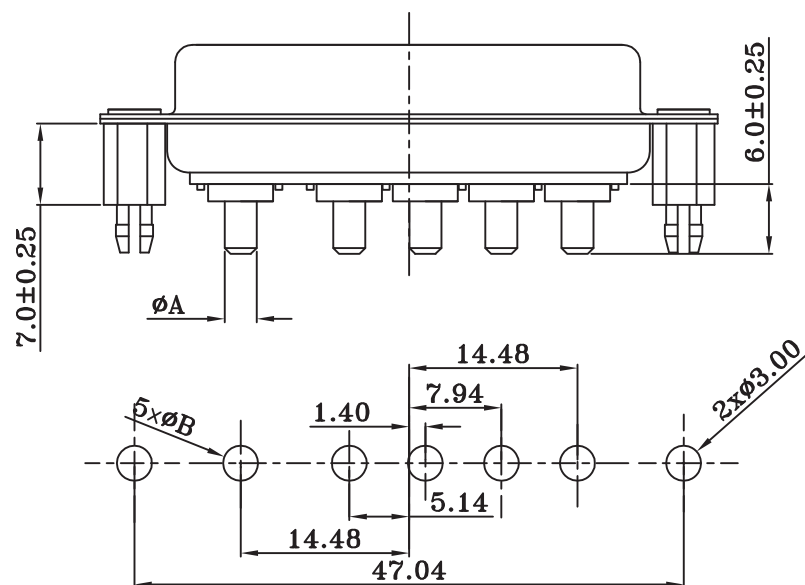

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED

FORK MATERIAL: BRASS; Ni FINISHED

HIGH FREQUENCY CONTACT MATERIAL: PHOSPHOR BRONZE, 3U"~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH FREQUENCY CONTACT CURRENT RATING :50 OHM.

HIGH FREQUENCY CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

 Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.38	x.°	± 2.0°		PD-SUB connector Power 5W5 Female Straight Type with Fork		
x.x	= ± 0.25	.x°	± 0.5°				
x.xx	= ± 0.13						
DRAWN	DM Yang	DATE	2009/09/23	PART NO.	DSUB-SP05W5FS08X00		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A