
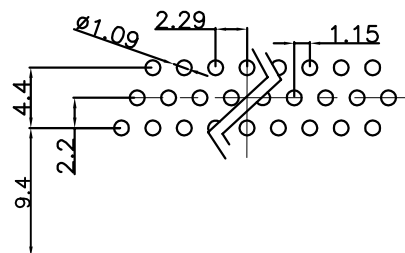
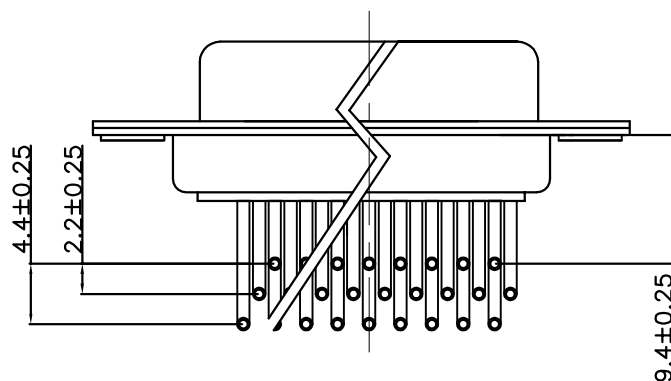



“*” Pivot Dimension

RoHS Component

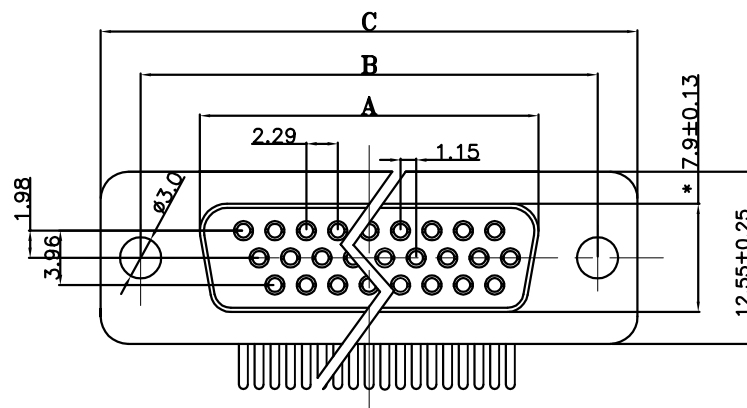

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT NICKEL FINISHED
 BACK SHELL TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : PHOSCU
 CONTACT FINISH : FULL GOLD 30u" FINISHED
 #4-40 THREADED RIVETS

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

POS.	A±0.2	B±0.2	C±0.2	D±0.2
15	16.33	24.99	30.81	19.28
26	24.70	33.30	39.20	27.70
44	38.38	47.04	53.04	41.30

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.25	x.°	± 2.0°		D-SUB HD Male Connector Pin Right Angle Type		
x.x	= ± 0.15	x.°	± 0.5°				
x.xx	= ± 0.05						
DRAWN			DM Yang	DATE	2010/01/08	PART NO.	DSUB-SRXXPF10102
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A