


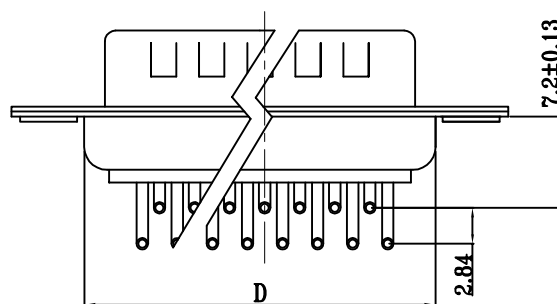


“*” Pivot Dimension

RoHS Component

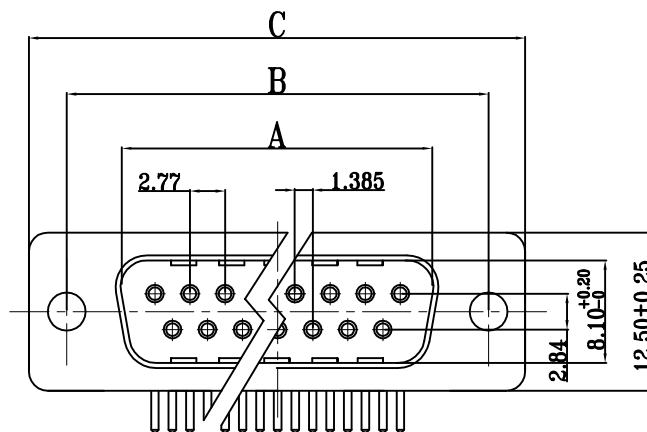

PCB LAYOUT



MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT NICKEL FINISHED
 BACK SHELL TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : PHOSCU
 CONTACT FINISH : FULL GOLD FINISHED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

	A	B	C	D
09P	16.92	24.99	30.81	19.28
15P	25.35	33.32	39.20	27.51
25P	38.96	47.04	53.04	41.28
37P	55.42	63.50	69.32	57.71

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.38	x.°	± 2.0°		D-SUB connector Male Solder Type Pin Right Angle Type		
x.x	= ± 0.25	x.°	± 0.5°				
x.xx	= ± 0.13						
DRAWN	DM Yang	DATE	2009/09/15	PART NO.	DSUB-SRXXPS		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A