


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/02/27	

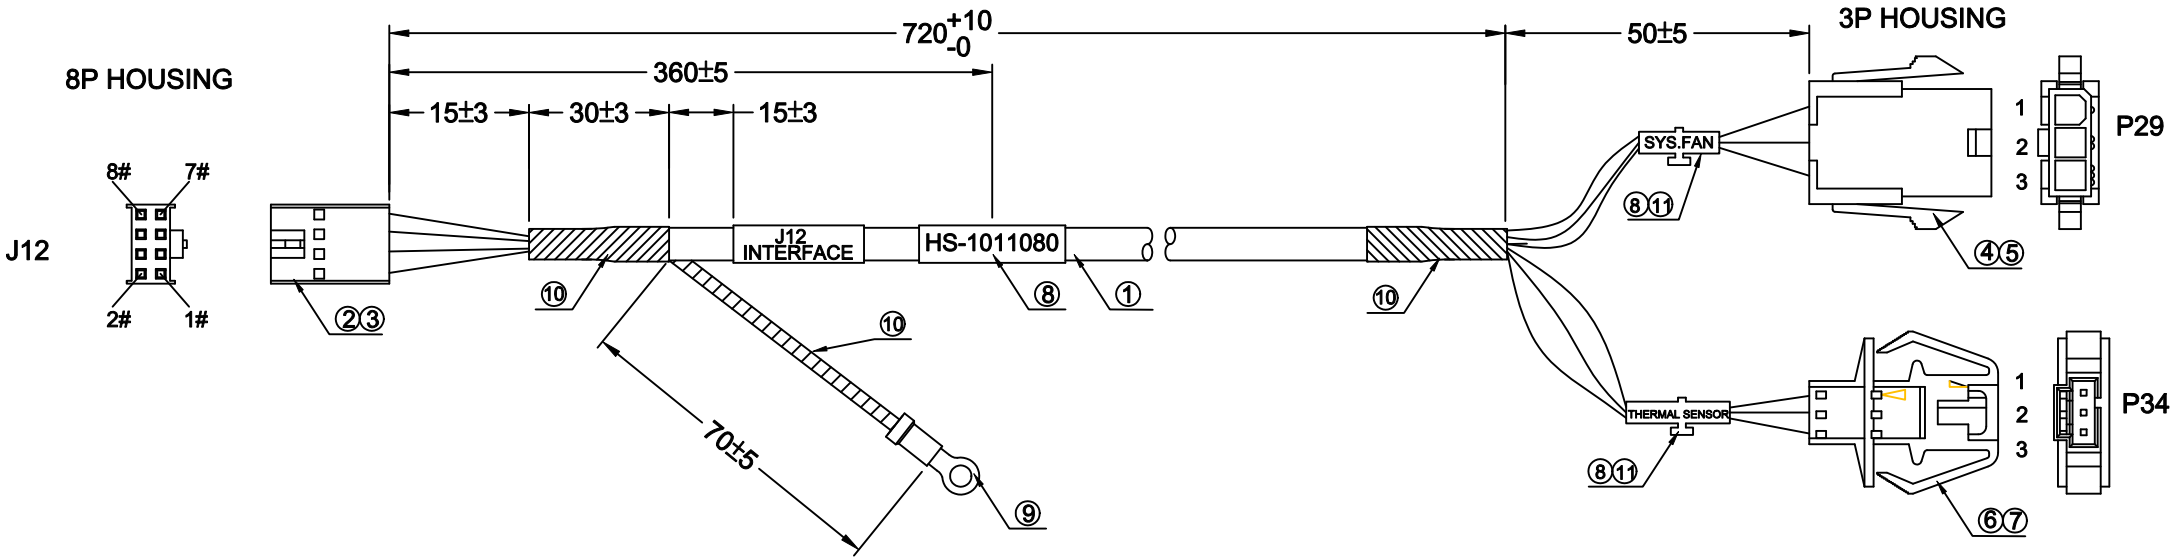

PIN ASSIGNMENT

8P HOUSING		3P HOUSING	
J12		P29	
3	BROWN	1	
2	BLUE	2	
1	GREEN	3	
		P34	
6	RED	1	
8	WHITE	2	
7	BLACK	3	

RING TERMINAL ——— DRAIN WIRE

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a). 100% OPEN, SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE: 20 Mohm MIN.
 DC 300V 0.01sec.
 (c). CONTACT RESISTANCE: 3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
11	2	F0064	NYLON MARKER TIE,(MCV-100)
10	3		HEAT SHRINK TUBE:BLACK.
9	1	B0327	RING TERMINAL,YELLOW(PV22-6R OR EQ).(HRV1.25-3.7S)
8	4		LABEL.
7	3	B0314	TERMINAL:1602-0081.(MOLEX)
6	1	B0352	HOUSING:701-07-0037(MOLEX),PITCH:2.54MM,BLACK.
5	3	B0342	TERMINAL:JS-1148-T,TIN PLATED.
4	1	B0351	HOUSING:JS-1148-03,PITCH:4.2MM,BLACK.
3	6	B0336	TERMINAL:90119-0109.(MOLEX)
2	1	B0350	HOUSING:90142-0008(MOLEX),PITCH:2.54MM,BLACK.
1	1	E0954	UL2464 22AWG*6C+AD GRAY PVC JACKET, OD:5.8MM

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	Deng zhifei	SCALE	FREE	TITLE		
CHECK, BY	Cao jiawei	REV	A	HOUSING 8P+TERMINAL/HOUSING 3P+HOUSING 3P		
APP, BY	Mr. Huang	DATE	2015/02/27	TOLERANCES		
DWG NO.	SE-S-0178		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.			SHEET	1/1	SIZE	A4