


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/02/27	

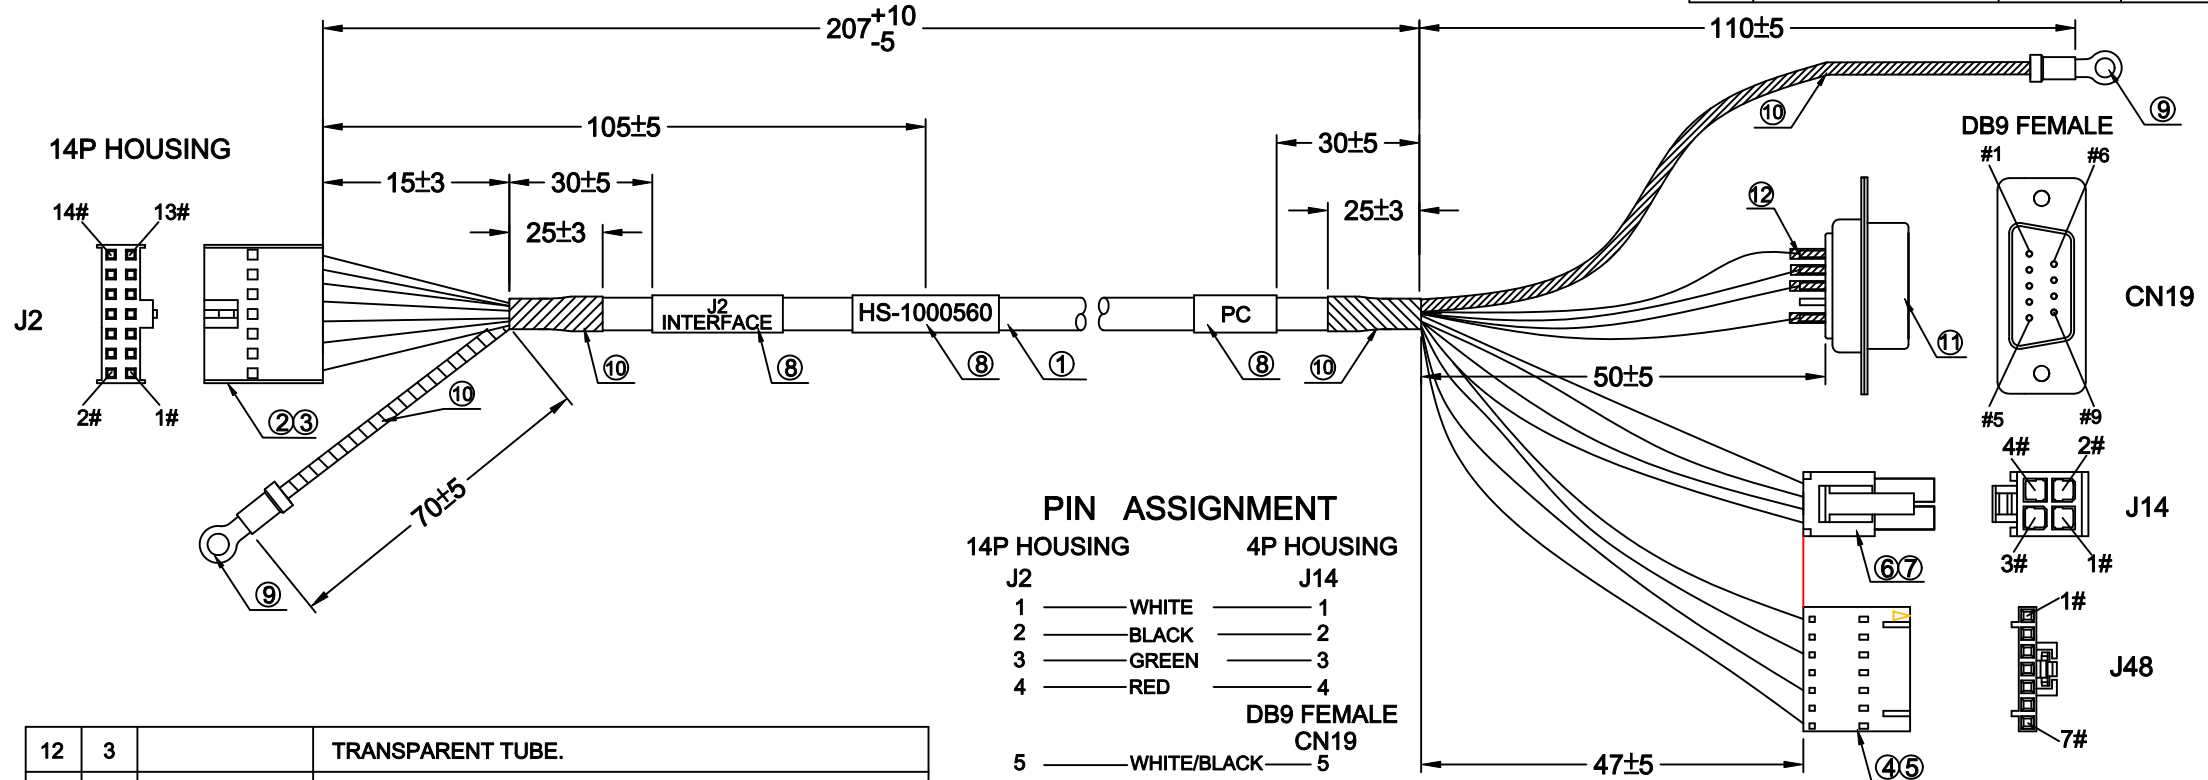

PIN ASSIGNMENT

14P HOUSING	4P HOUSING
J2	J14
1 — WHITE	1
2 — BLACK	2
3 — GREEN	3
4 — RED	4
	DB9 FEMALE
	CN19
5 — WHITE/BLACK	5
6 — BLUE	2
7 — WHITE/RED	3
	7P HOUSING
	J48
8 — YELLOW	1
9 — ORANGE	2
10 — PURPLE	5
11 — GRAY	6
12 — BROWN	7

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

12	3		TRANSPARENT TUBE.
11	1	A0010	DB9 FEMALE, BLACK INSULATOR, SOLDER TYPE.
10	4		HEAT SHRINK TUBE: BLACK.
9	2	B0327	RING TERMINAL, YELLOW (PV22-6R OR EQ) (HRV1.25-3.7S).
8	3		LABEL WITH TRANSPARENT TUBE.
7	4	B0165	TERMINAL: TIN PLATED.
6	1	B0177	HOUSING: 2*2P, PITCH: 4.2MM, CLEAR.
5	5	B0222	TERMINAL: TIN PLATED. (JS-1142-T)
4	1	B0337	HOUSING: 7P, PITCH: 2.54MM, BLACK. (JS-1142-07)
3	12	B0336	TERMINAL: 90119-0109. (MOLEX)
2	1	B0335	HOUSING: 90142-0014 (MOLEX), PITCH: 2.54MM, BLACK.
1	1	E0935	UL2464 22AWG*12C+AD GRAY PVC JACKET, OD: 7.5MM
ITEM	QTY	PART NUMBER	DESCRIPTION

RING TERMINAL — DRAIN WIRE — RING TERMINAL

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK, BY	Cao jiawei	REV	A	HOUSING 14P+TERMINAL/TERMINAL +DB9P F+HOUSING 4P+HOUSING 7P	
APP, BY	Mr. Huang	DATE	2015/02/27	TOLERANCES	
DWG NO.	SE-S-0179			X.= ±	.X.= ±
PART NO.				SHEET	1/1
				SIZE	A4