


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/02/27	

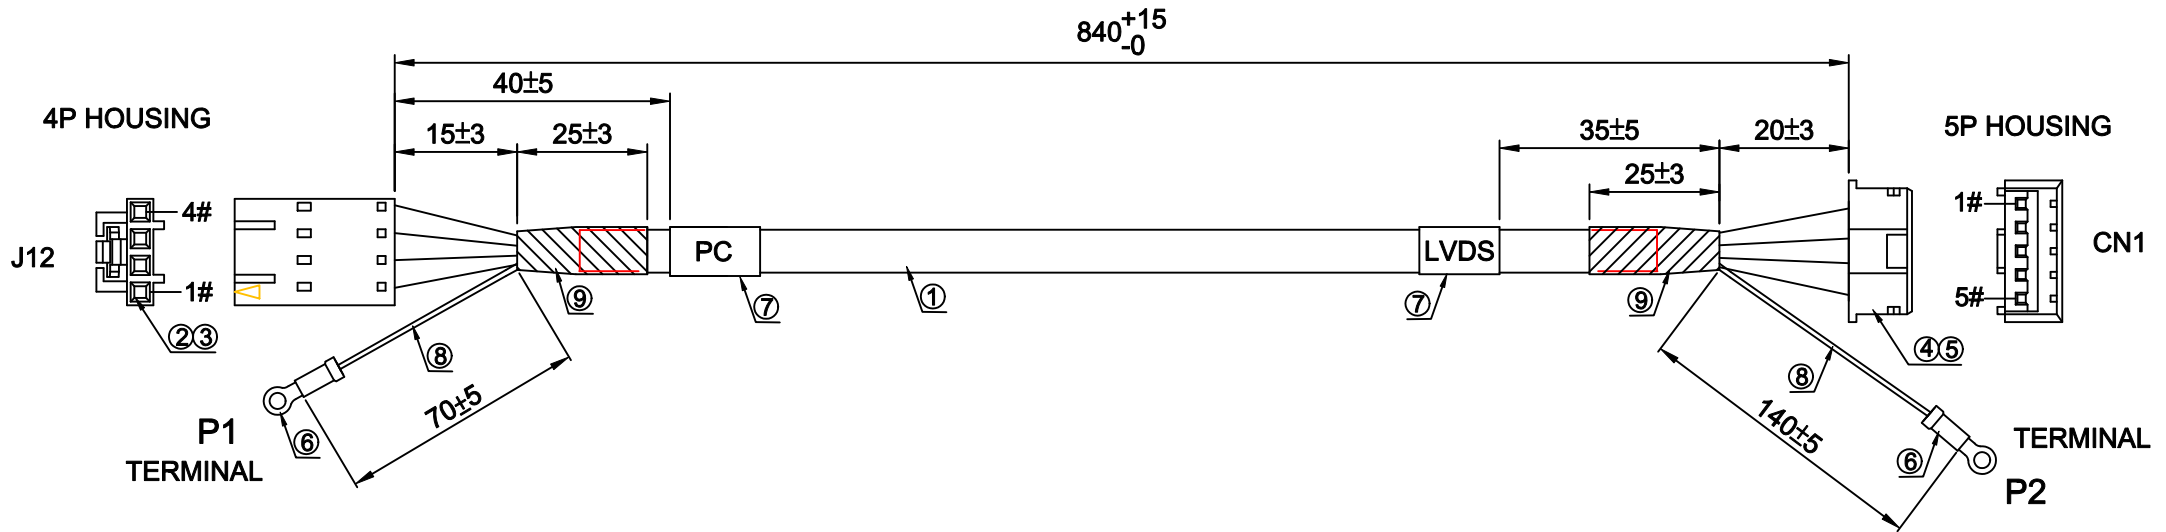

**PIN ASSIGNMENT**

J12		CN1
1	— RED —	1
2	— BLACK —	2
3	— GREEN —	3
4	— WHITE —	5
P1		P2
TERMINAL	—	TERMINAL

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
  - (c). CONTACT RESISTANCE: 3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
9	2	T0128-1	BLACK HEAT SHRINK TUBE.
8	2	F0071	22AWG UL1007 BLACK.
7	2	H2975/T0014	LABEL WITH TRANSPARENT TUBE.
6	2	B0327	TERMINAL:PV22-4R YELLOW OR EQUIVALENT.(HRV1.25-3.7S)
5	4	B0141	TERMINAL:PITCH:2.0MM (JS-1124-T).
4	1	B0312	HOUSING:PITCH:2.0MM (JS-1124-05).
3	4	B0222	TERMINAL:PITCH:2.54MM (JS-1142-TG).
2	1	B0355	HOUSING:4P PITCH:2.54MM (JS-1142-04).
1	1	E0956 W99111601	UL2464 22AWG*4C+AD GRAY PVC JACKET, OD:5.0MM

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	Deng zhifei	SCALE	FREE	TITLE		
CHECK, BY	Cao jiawei	REV	A	4P HOUSING+TERMINAL/5P HOUSING+TERMINAL		
APP, BY	Mr. Huang	DATE	2015/02/27	TOLERANCES		
DWG NO.	SE-S-0180		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.		SHEET	1/1	SIZE	A4	