



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/02/27	

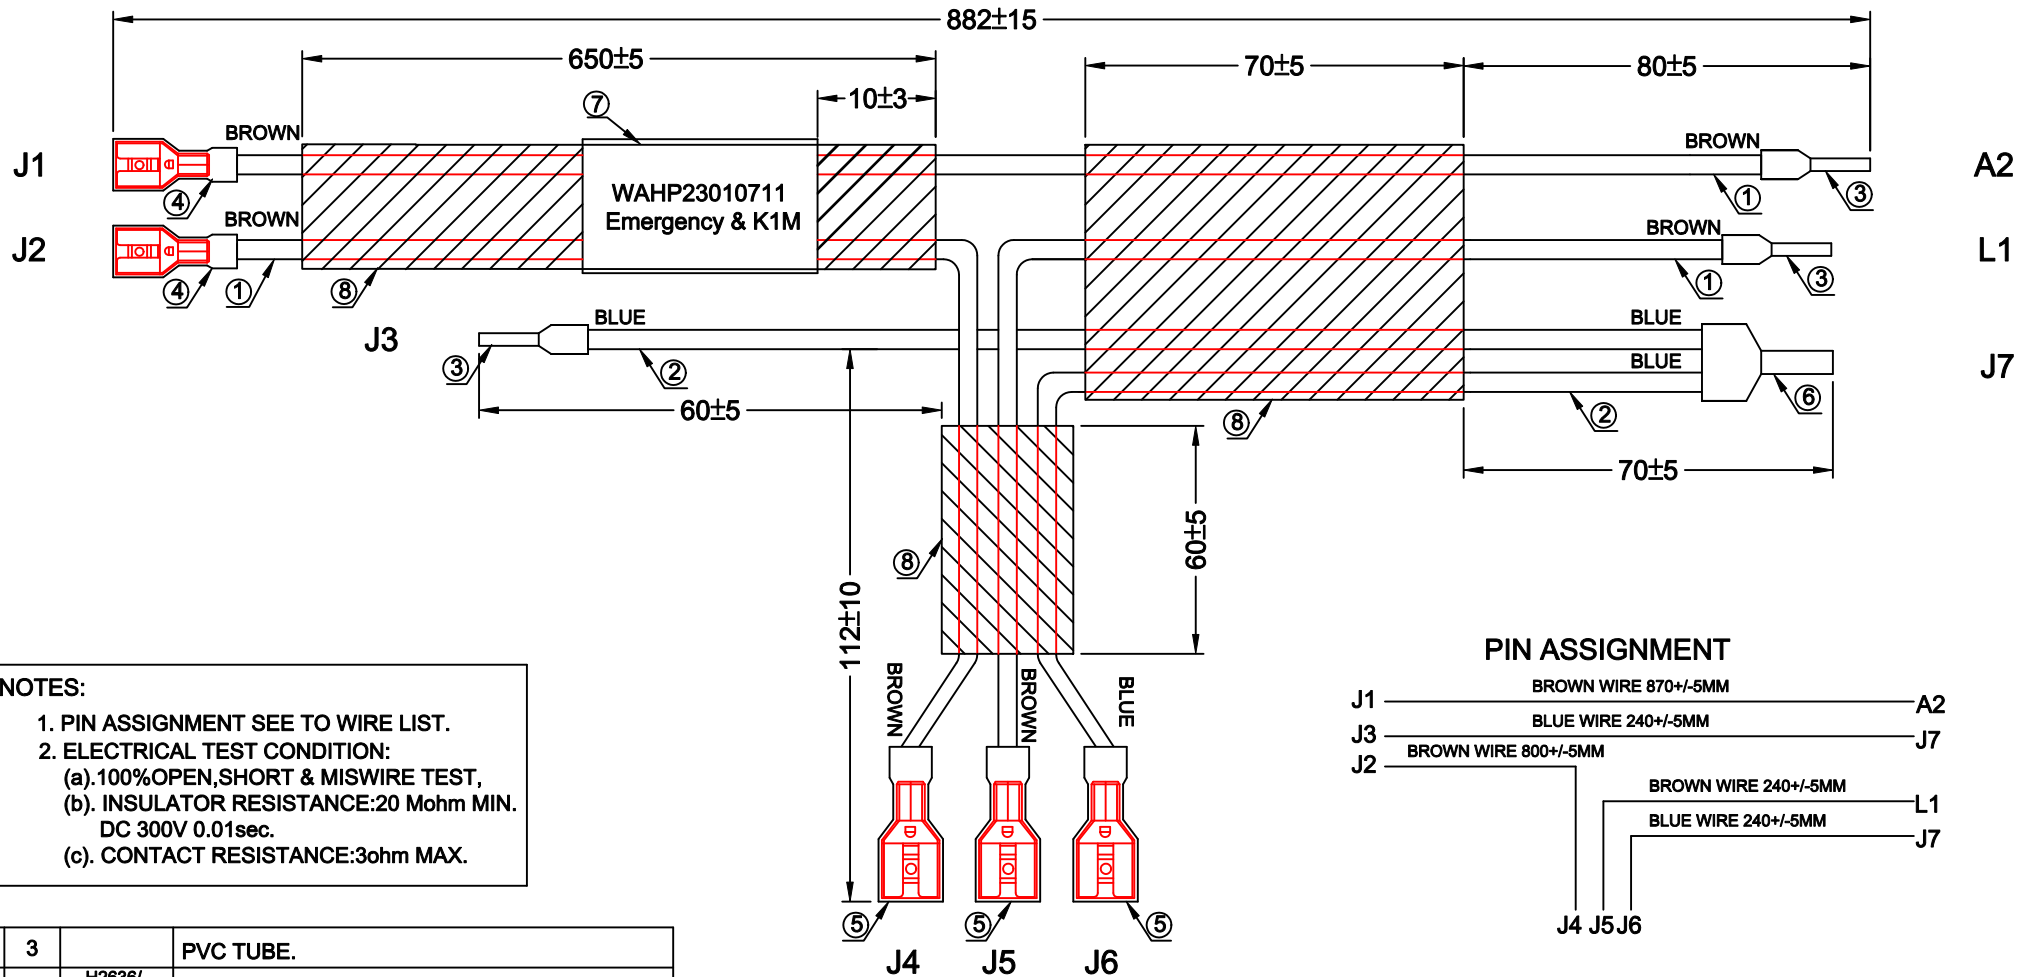

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

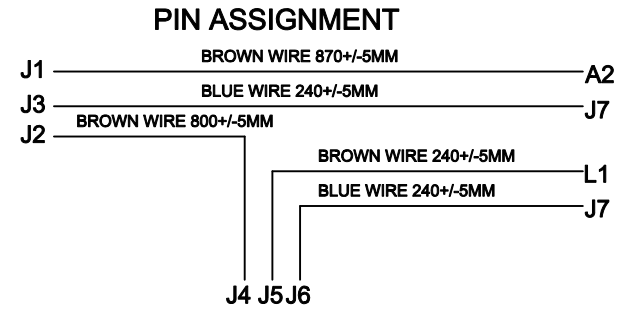

ITEM	QTY	PART NO.	DESCRIPTION
8	3		PVC TUBE.
7	1	H2836/T0008	LABEL WITH TRANSPARENT TUBE.
6	1	B0311	TERMINAL: 18AWG RED (HTE 1008).
5	3	B0310	TERMINAL: 18AWG RED (KST: FDFD1-250).
4	2	B0309	TERMINAL: 18AWG RED [HFDFD 1.25-110(5)].
3	3	B0305	TERMINAL: RED 18AWG (HE 1008).
2	2	F0084	UL1015 18AWG BLUE.
1	3	F0101	UL1015 18AWG BROWN.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	Deng zhifei	SCALE	FREE	TITLE			
CHECK, BY	Cao jiawei	REV	A	TERMINAL/TERMINAL			
APP, BY	Mr. Huang	DATE	2015/02/27	TOLERANCES			
DWG NO.	SE-S-0181			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.		SHEET	1/1	SIZE	A4		