

1

2

3

4

5





6

A

B


C

D

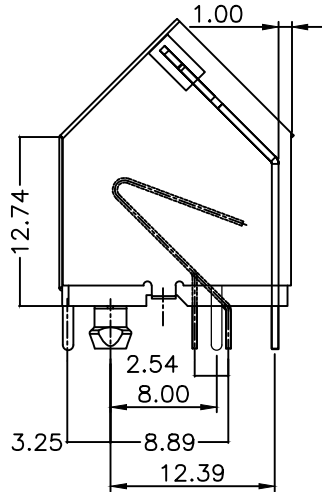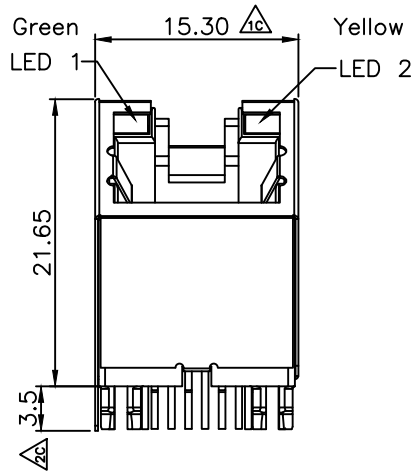

Electrical:
1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.
Mechanical:
1.Operating:750 Cycles Min.
Environmental:
1.Storage:-40°C To +85°C.
2.Operation:-20°C To +75°C.
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

PCB LAYOUT/TOP VIEW

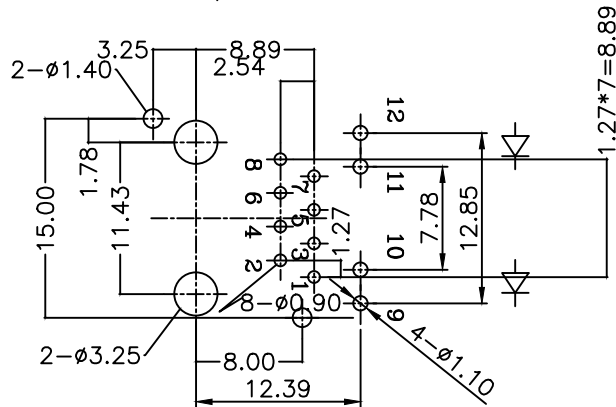

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELDED: BRASS WITH NICKEL PLATED

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.50	Angles ± 3°		RJ45 Module Jack Connector 45 degree (8P8C) with/ Shielded and LED(G/Y)Type			
x.x	= ± 0.38						
x.xx	= ± 0.25						
x.xxx	= ± 0.10			UNIT			
				mm			
DRAWN	Alan	DATE	2011/03/23	PART NO.	JAKR-S045030256-G-Y		
SCALE	2.5:1	SIZE	A4	SHEET	1/1	REV	A

1

2

3

4

5

6

A

B

C

D