



**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/01/22	

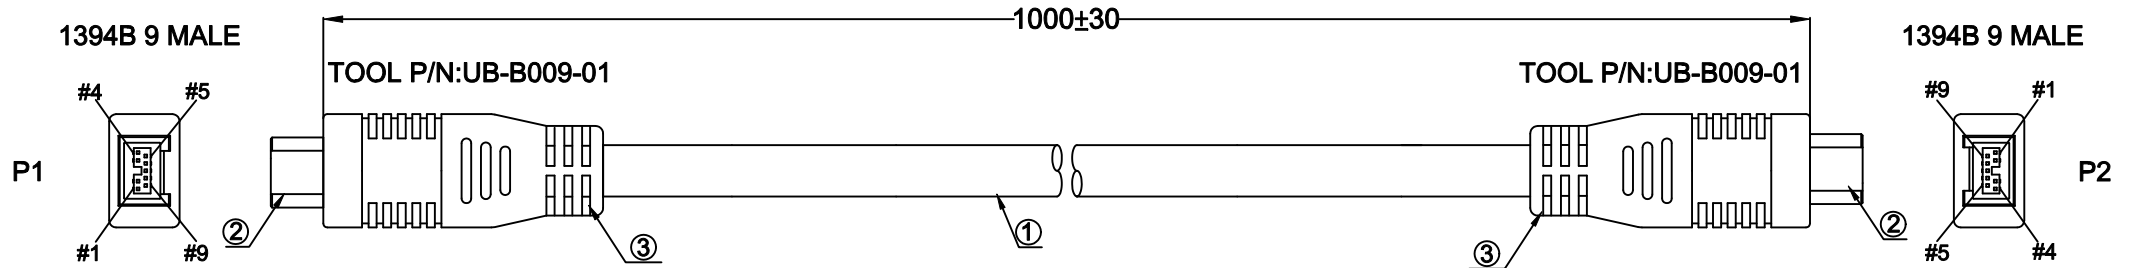

**PIN ASSIGNMENT**

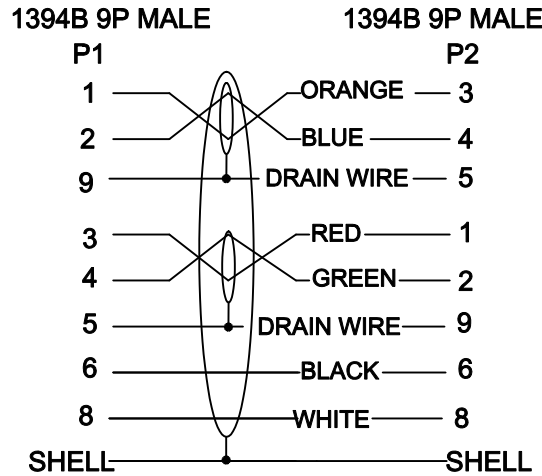

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN.  
DC 300V 0.01sec.
  - (c). CONTACT RESISTANCE: 3ohm MAX.

3		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
2	2	A0566-2	1394B 9PIN MALE, BLACK INSULATOR, SOLDER TYPE.
1	1	E0763 H7306BL	[(26AWG*1PAIR+2*DRAIN+CU-PT+MYLAR)*2PCS+22AWG*2C]+M+AM+BRAID OD:6.9MM BLACK PVC JACKET UL20276
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE			
CHECK, BY	<i>Eao jiawei</i>	REV	A	1394B 9P M/M			
APP, BY	<i>Mr. Huang</i>	DATE	2015/01/22	TOLERANCES			
DWG NO.	SE-S-0174			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0174-1M			SHEET	1/1	SIZE	A4