



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/04/27	


HR10A-7P-6P
MALE



TOOL P/N.:MD-B006-18

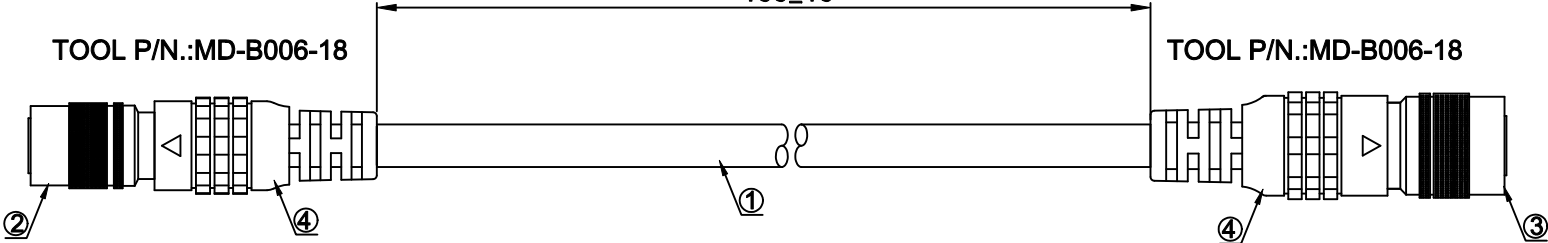

HR10A-7P-6S
FEMALE



- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3ohm MAX.

PIN ASSIGNMENT

HR10A-7P-6P	HR10A-7P-6S
1	1
2	2
3	3
4	4
5	5
6	6
SHELL	SHELL

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0605	CONNECTOR:HR10A-7P-6S,SOLDER TYPE.
2	1	A0592	CONNECTOR:HR10A-7P-6P,SOLDER TYPE.
1	1	E0340	26AWG*6C+AD OD:5.0MM BLACK PVC JACKET UL2464
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Gavey</i>	SCALE	FREE	TITLE				
CHECK,BY		REV	A	HIROSE 6P M/F				
APP,BY		DATE	2015/04/27	TOLERANCES				
DWG NO.	SE-S-0188			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.				SHEET	1/1	SIZE	A4	