


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/05/29	

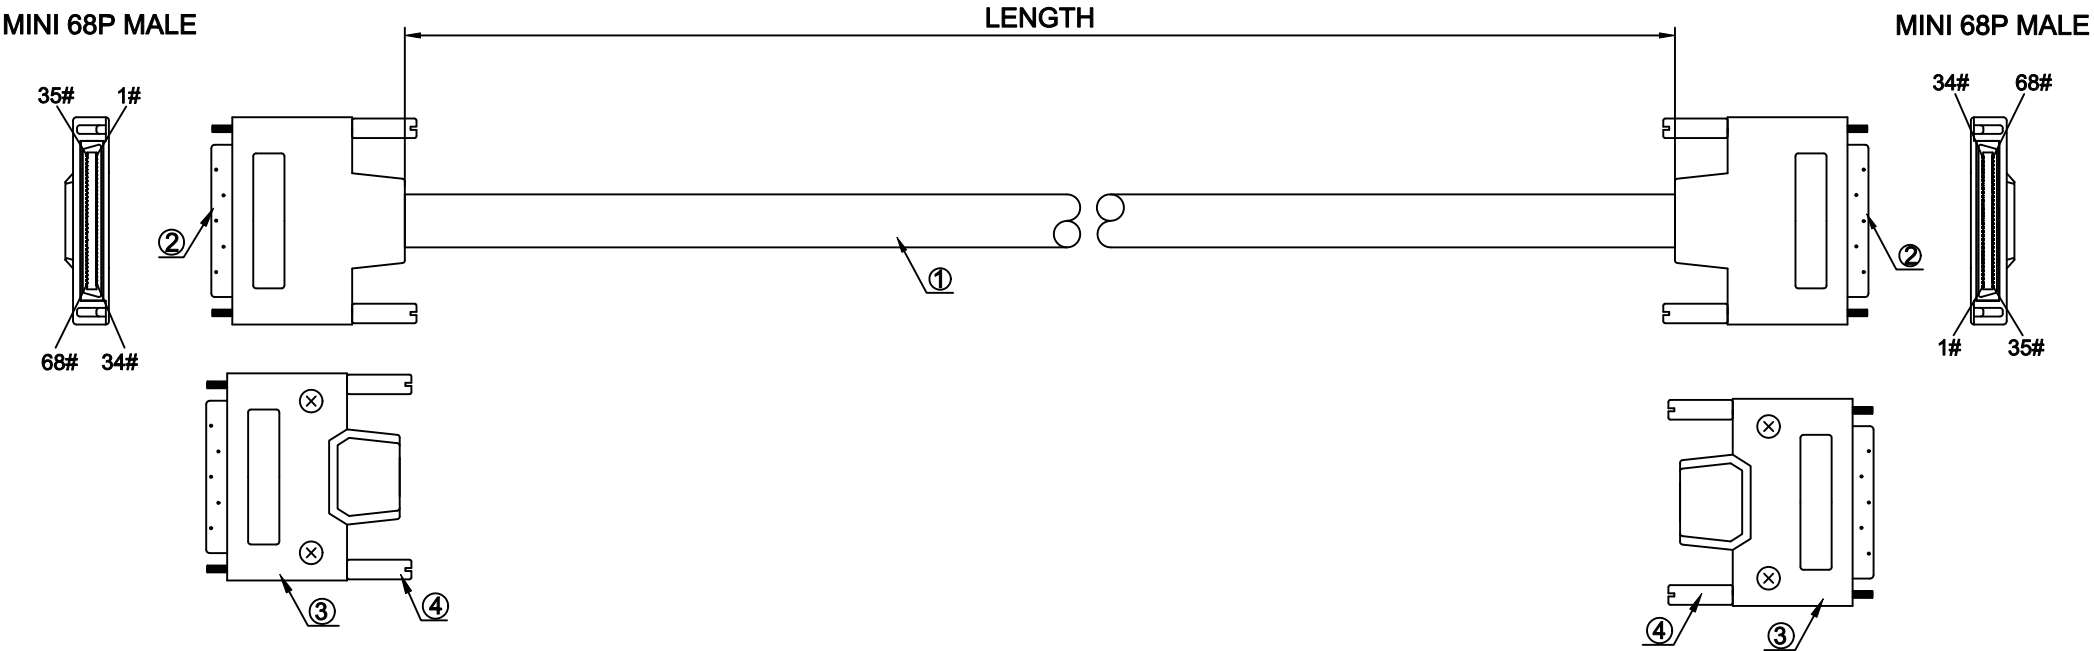


- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm MAX.

4	4	C0039	SCREW:M2 5.0*45.9MM.
3	2	N0009	MINI68P METAL SHELL.
2	2	A0139	MINI 68P, MALE, I.D.C TYPE, BLACK INSULATOR.
1	1	E0622	UL20276 28AWG*34PAIR+AM+DRAIN+BRAID BLACK PVC JACKET, OD:9.0MM.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Caojiawei	REV	A	MINI 68P M/M				
APP,BY	Mr. Huang	DATE	2015/05/29	TOLERANCES				
DWG NO.	SE-S-0198			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.				SHEET	1/1	SIZE	A4	

PIN ASSIGNMENT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/05/29	

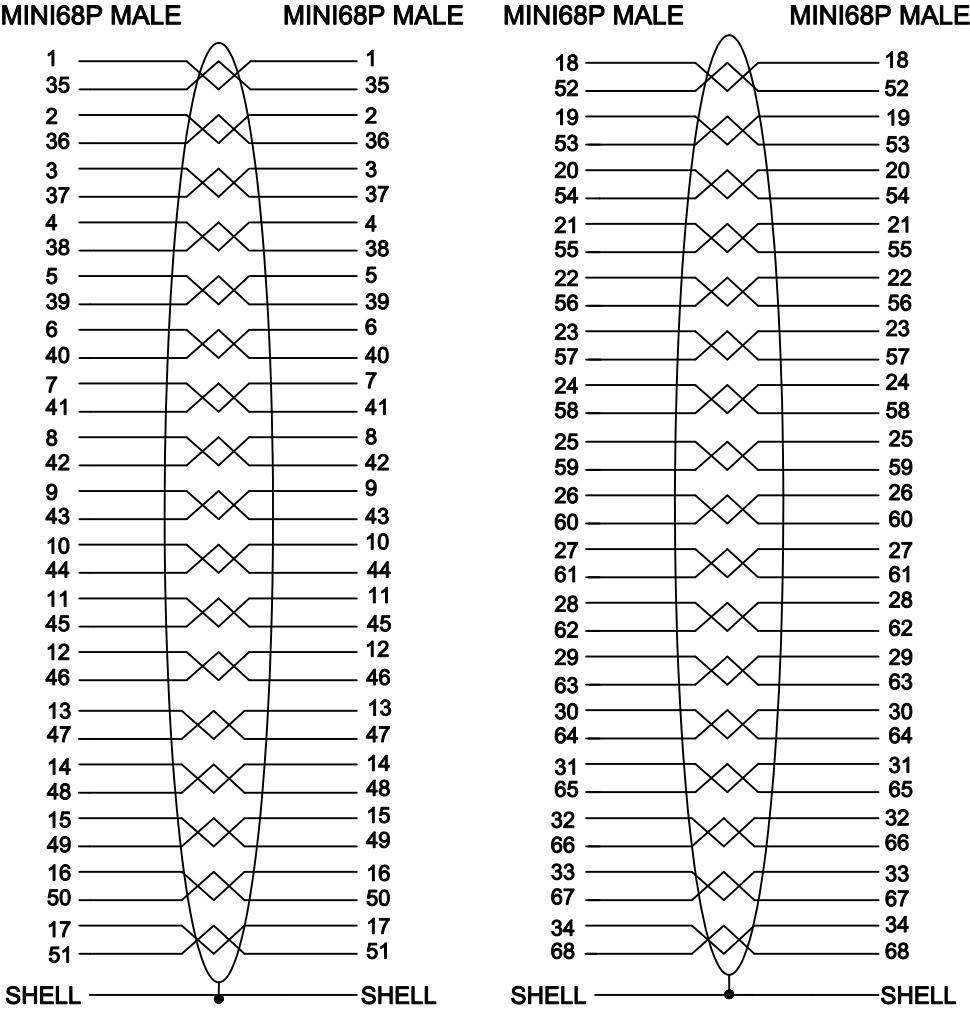

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Caojiawei	REV	A	MINI 68P M/M				
APP,BY	Mr. Huang	DATE	2015/05/29	TOLERANCES				
DWG NO.	SE-S-0198			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.				SHEET	1/1	SIZE	A4	