



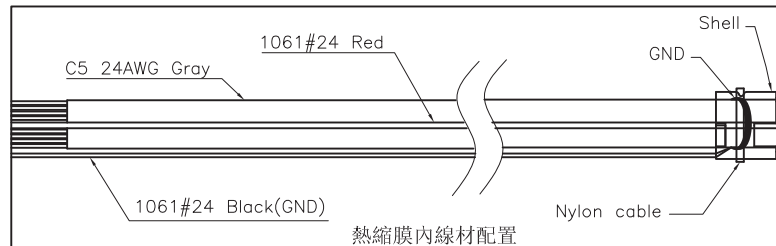

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

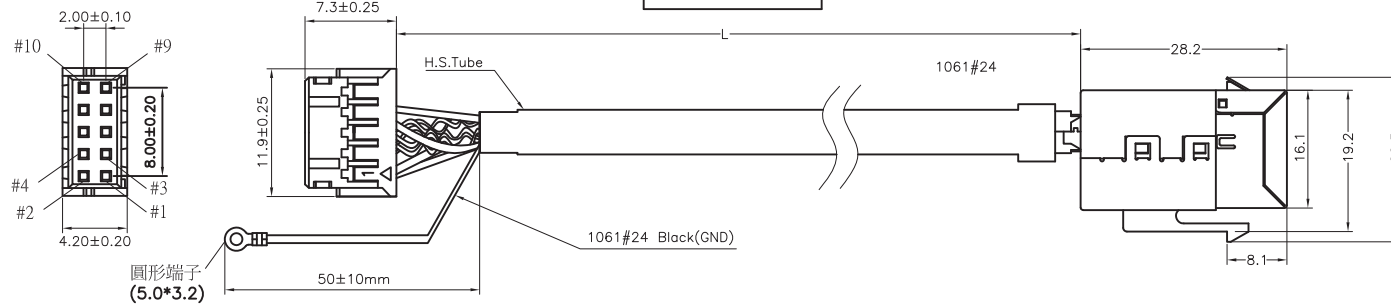

	黑	白藍	藍	白橘	橘	白綠	綠	白棕	棕	紅 電源	NC
RJ	Shell	6	5	2	3	4	7	8	9	1	
2X5 Housing		1	10	4	6	8	3	5	7	2	9
圓形端子	接地										

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.



MECHANICAL:

1. HOUSING 1 MATERIAL : PC UL94V-0.
2. INSERT MATERIAL : PBT+30% GF. UL94V-0
3. PCB MATERIAL : FR-4, THICKNESS 1.6mm.
4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35mm.
5. IDC CONTACT MATERIAL : PHOSPHOR BRONZE t=0.40mm.WITH SILVER PLATING
6. CABLE : FTP C5 24AWG GRAY+1061#24 Black+1061#24 Red.
7. 2x5 PHD SERIES HOUSING : PA66 UL94V-0,Pitch=2.0mm .

ENVIRONMENTAL:

1. STORAGE : -20°C TO +85°C.
2. OPERATION : -20°C TO +85°C.

CONFORM TO TIA/EIA 568B CATEGORY 5
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

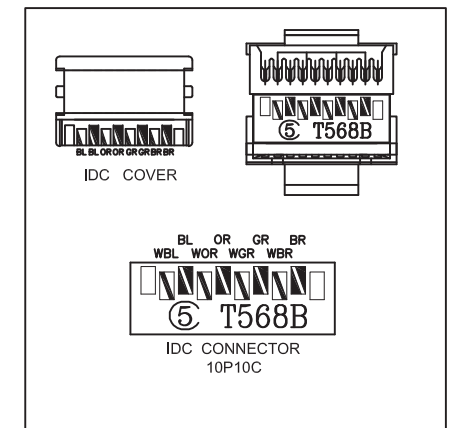

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ±0.20 x.xx = ±0.15 Angles ±5° x.xxx = ±0.10				C5 Cable W/KeyStone 10P10C+2X5 PHD Series Housing			
			UNIT				
			mm				
DRAWN	Bella	DATE	2012/05/06	PART NO.	SE-S-CKS-PH06		
SCALE	1:1	SIZE	A3	SHEET	1/1	REV	A0