


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/12/30	
B	CHANGE CABLE	2015/05/06	

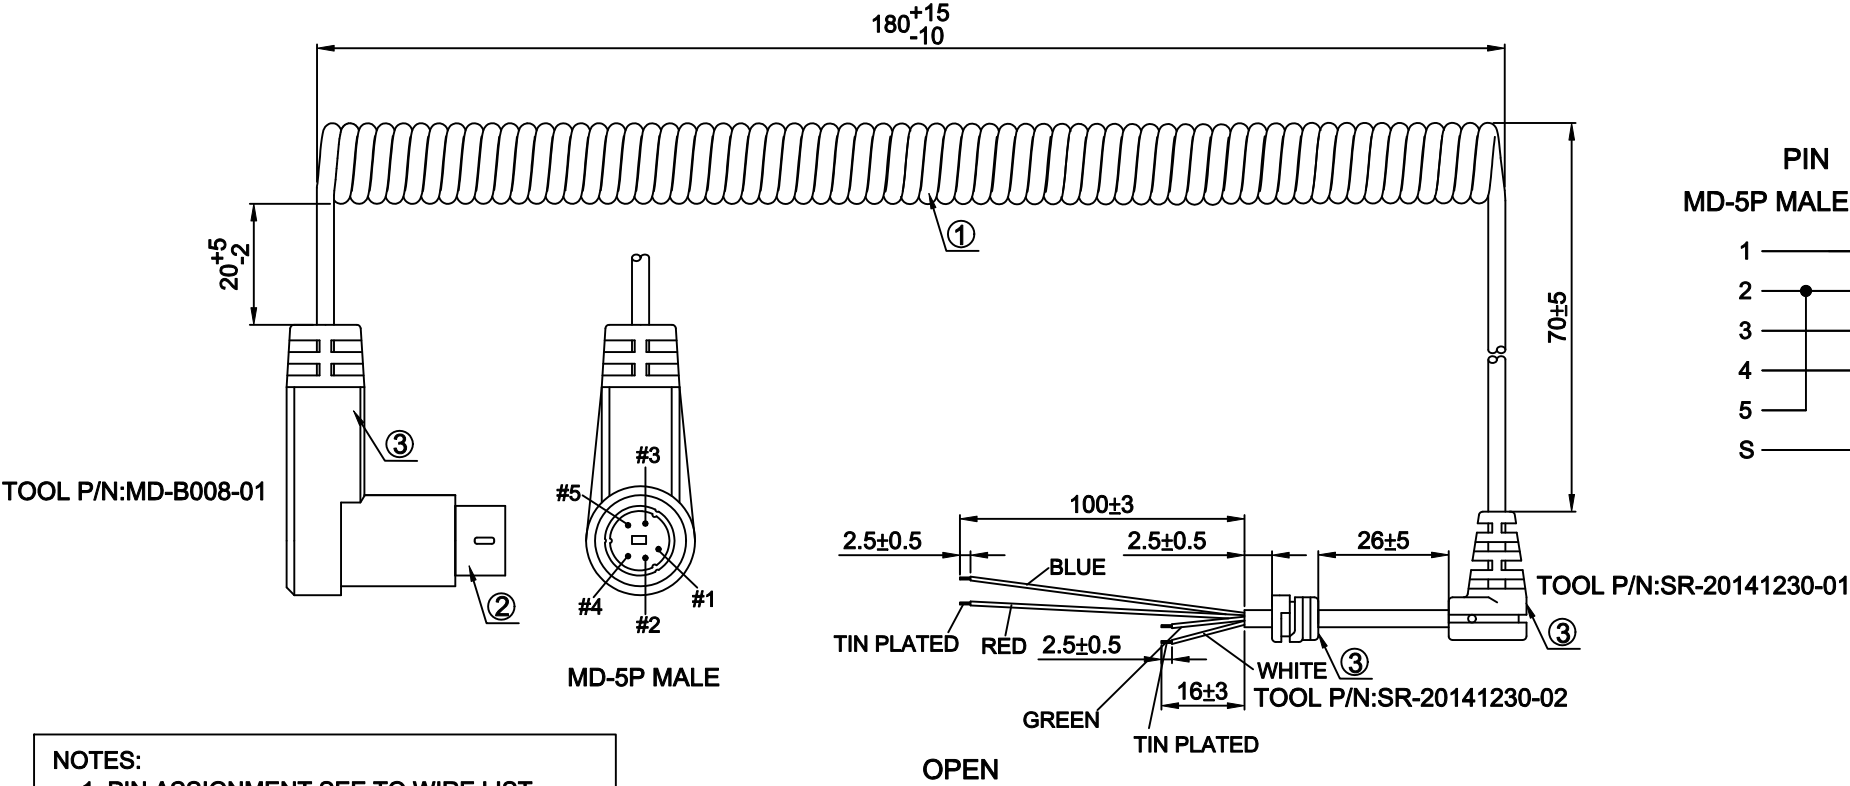

PIN ASSIGNMENT		
MD-5P MALE		OPEN
1	—————	BLUE
2	—————	GREEN
3	—————	WHITE
4	—————	RED
5	—————	
S	—————	BRAID

- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3 ohm MAX.

3			CONNECTORS AND SR OVERMOLD COOL GREY 10C PU 50P.
2	1	A0232	MD-5P MALE BLACK INSULATOR SOLDER TYPE.
1	1		(28AWG+250D Kevlar)*4C+S 90%+T OD:3.5MM NOUL COIL OD:14.0MM L=60MM*190MM*230MM COOL GREY 10C PU JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Bao jiawei	REV	B	MD-5P M/OPEN				
APP,BY	Mr.Huang	DATE	2014/12/30	TOLERANCES				
DWG NO.	SE-S-0169			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.				SHEET	1/1	SIZE	A4	