


RoHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/06/24	

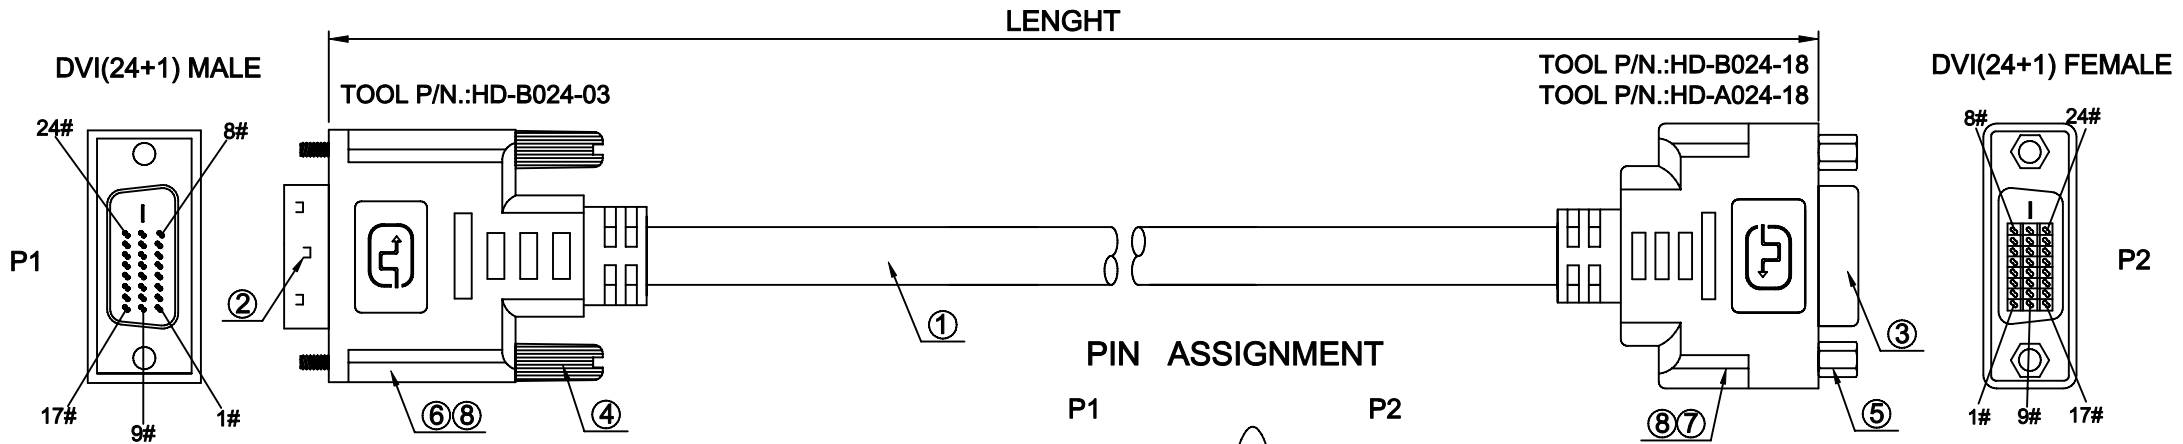


NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec,
 - CONTACT RESISTANCE: 3 ohm MAX.


PIN ASSIGNMENT

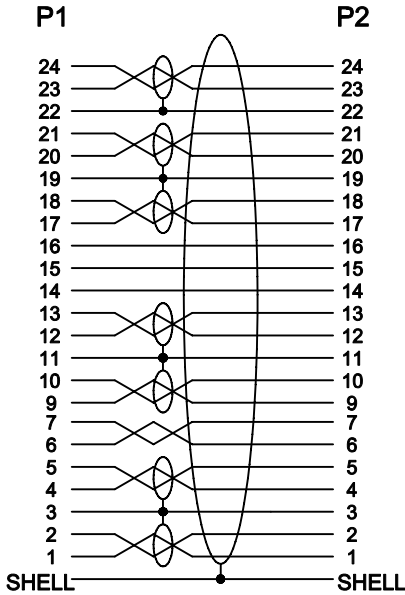

SCREW DETAIL

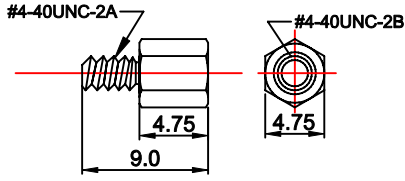

DVI SCREW DETAIL

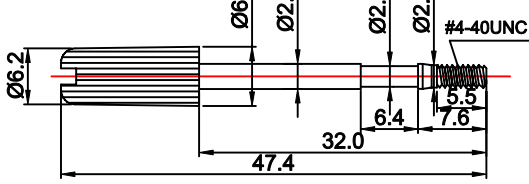

8		G0001	ALL CONNECTORS OVERMOLD BLACK PVC .
7	1	D0071	DVI METAL CAN.
6	1	D0014	DVI METAL CAN.
5	2	C0099	SCREW:#4-40UNC 4.75*9.0 NUT NICKEL PLATED.
4	2	C0019	SCREW:#4-40UNC,E32,BLACK PLASTIC.
3	1	A0516	DVI (24+1) FEMALE ,WHITE INSULATOR,SOLDER TYPE.
2	1	A0112	DVI (24+1) MALE ,WHITE INSULATOR,SOLDER TYPE.
1	1	E0131	(28AWG*2C+D+FAM)*7PCS+28AGW*1Pair+28AWG*3C +AM+BRAID OD:8.6MM BLACK PVC JACKET UL20276.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.
DRAWN	LV DON3FU	SCALE	FREE	TITLE
CHECK,BY		REV	A	DVI(24+1) M/DVI(24+1) F
APP,BY		DATE	2015/06/24	TOLERANCES
DWG NO.	SE-S-0214			X.= ± .X.= ± .XX.= ± .XXX.= ±
PART NO.				SHEET 1/1 SIZE A4