


REV	DESCRIPTION	ENG.BY	DATE
A	The first release	Zhang.Han	2015-04-23

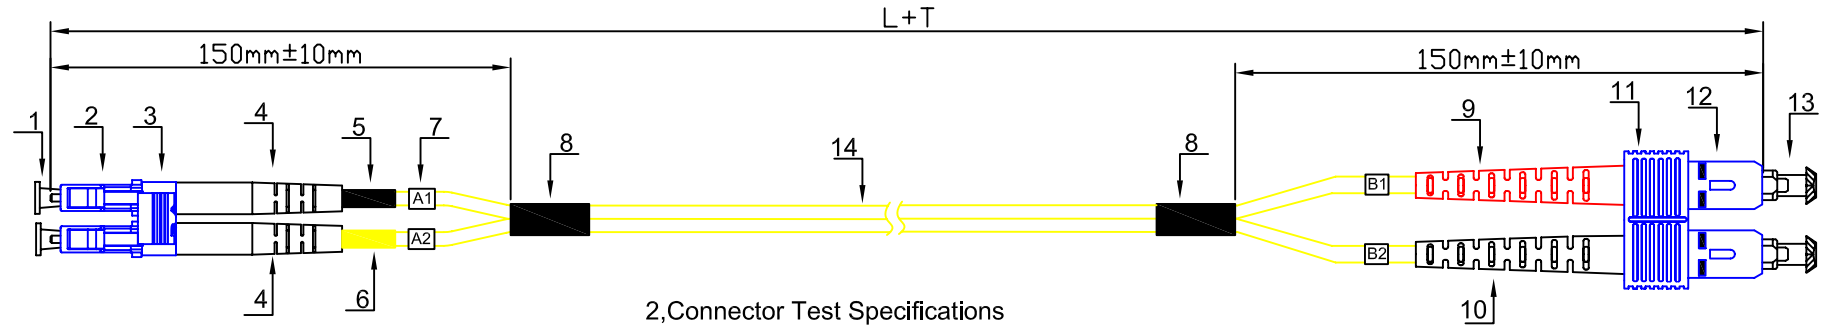


1, Patchcord Length

Length L	Tolerance T
$L < 1.0\text{m}$	$\pm 0.05\text{m}$
$1.0\text{m} \leq L < 20\text{m}$	$\pm 0.10\text{m}$
$20\text{m} \leq L$	$\pm 1\% \times L$


2,Connector Test Specifications

Parameter	Specifications	
Insertion Loss	≤0.30dB	
Return Loss	≥50.0dB	
	LC/UPC	SC/UPC
ROC	7-25mm	10-25mm
Apex Offset	<50um	<50um
Fiber Height	-50nm to +50nm	-50nm to +50nm
Durability(1000Mating)	0.2dB Max.Increase	
Operating Temperature	-40℃~85℃	
Storage Temperature	-40℃~85℃	

3, Packaging

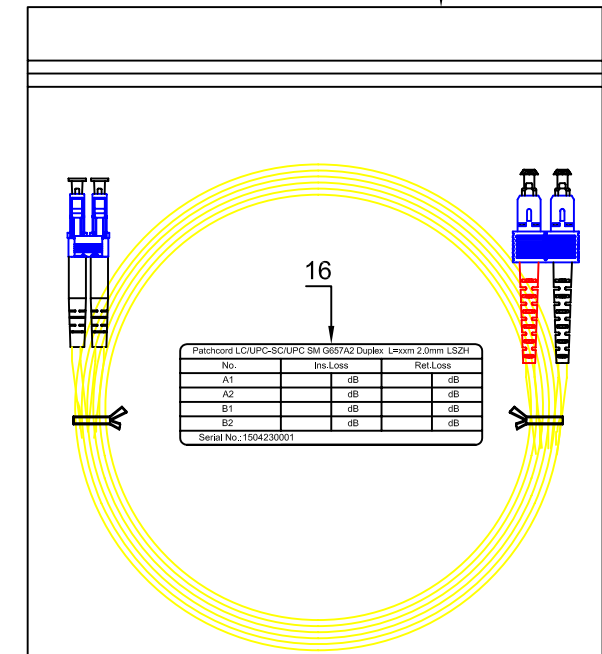

Cable Profile View

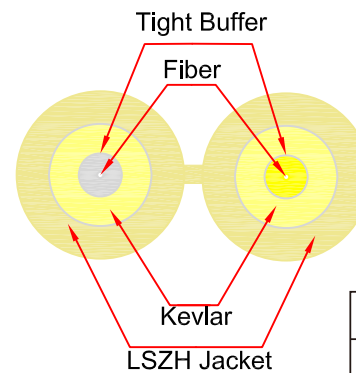

16	Label (9x2cm)	1
15	Bag (20x23cm) 1PC/bag	1
14	SM Duplex 9/125 G657A2 LSZH 2.0 Cable (Yellow)	Xm
13	SC Clear Dust Cap	2
12	SC/UPC SM Duplex Connector Ø2.0mm (Blue)	1
11	SC Duplex Blue Clip	1
10	SC Black Boot	1
9	SC Red Boot	1
8	Heat Shrink Tube L=25mm(Black)	2
7	Ø2.0mm Mark(A1.A2.B1.B2)	1
6	LC 2.0 Yellow Heatshrink tube with Crimping	1
5	LC 2.0 White Heatshrink tube with Crimping	1
4	LC White Boot	2
3	LC Duplex Clip (Blue)	1
2	LC/UPC SM Duplex Connector Ø2.0mm (Blue)	1
1	LC White Dust Cap	2
ITEM	DESCRIPTION	Q'TY

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
AS DRAWING				LC/UPC-SC/UPC SM-Duplex 9/125 G657A2 2.0mm Patch Cord L=XM, LSZH Yellow Jacket			
DRAWN	Zhang	DATE	2015/04/23	PART NO.	SHPL-DLC-DSC-S2-G657A2-XXYL		
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A