
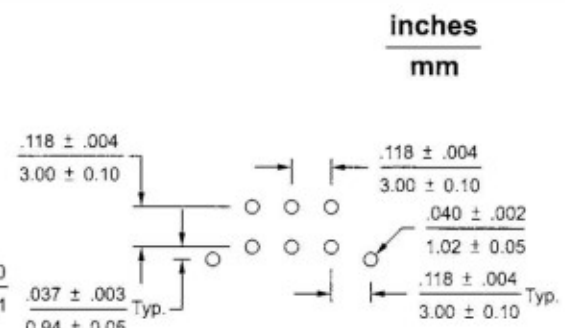


1 2 3 4 5 6 7 8

- 2 ~ 24 circuits available
- Material: Nylon 9T
- .025"(0.64mm) square pins
- Tin-plated brass pin
- Mates with SECONN 3025-N housing

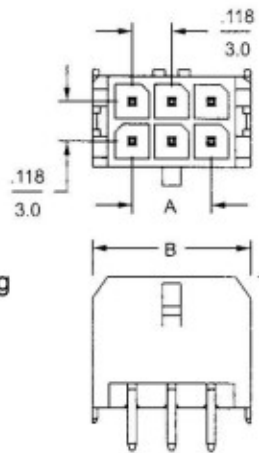


PCB Layout: Component side

Recommended PCB thickness: $\frac{.062}{1.57}$

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2		0.236 (6.0)		14	0.709 (18.0)	0.945 (24.0)	0.539 (13.7)
4	0.118 (3.0)	0.354 (9.0)		16	0.827 (21.0)	1.063 (27.0)	0.657 (16.7)
6	0.236 (6.0)	0.472 (12.0)		18	0.945 (24.0)	1.181 (30.0)	0.776 (19.7)
8	0.354 (9.0)	0.591 (15.0)	0.185 (4.7)	20	1.063 (27.0)	1.299 (33.0)	0.894 (22.7)
10	0.472 (12.0)	0.709 (18.0)	0.303 (7.7)	22	1.181 (30.0)	1.417 (36.0)	1.012 (25.7)
12	0.591 (15.0)	0.827 (21.0)	0.421 (10.7)	24	1.299 (33.0)	1.535 (39.0)	1.130 (28.7)

SPV-3045-2XX

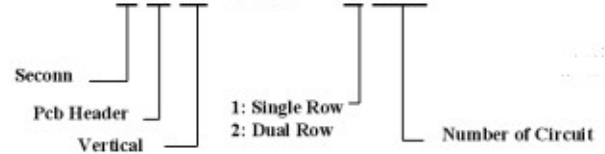

UNIT	mm			Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
				.118" (3.0mm) Vertical Header			
DRAWN		DATE		PART NO	SPV-3045-2XX		
SCALE		SIZE	A4	SHEET	1/1	REV	

1 2 3 4 5 6 7 8