


## RoHS COMPLIANT

| DESCRIPTION CONTROL |                |            |     |
|---------------------|----------------|------------|-----|
| REV                 | DESC           | DATE       | APP |
| A                   | FIRST RELEASE  | 2015/08/14 |     |
| B                   | CHANGE DRAWING | 2015/08/18 |     |
| C                   | CHANGE DRAWING | 2015/08/21 |     |

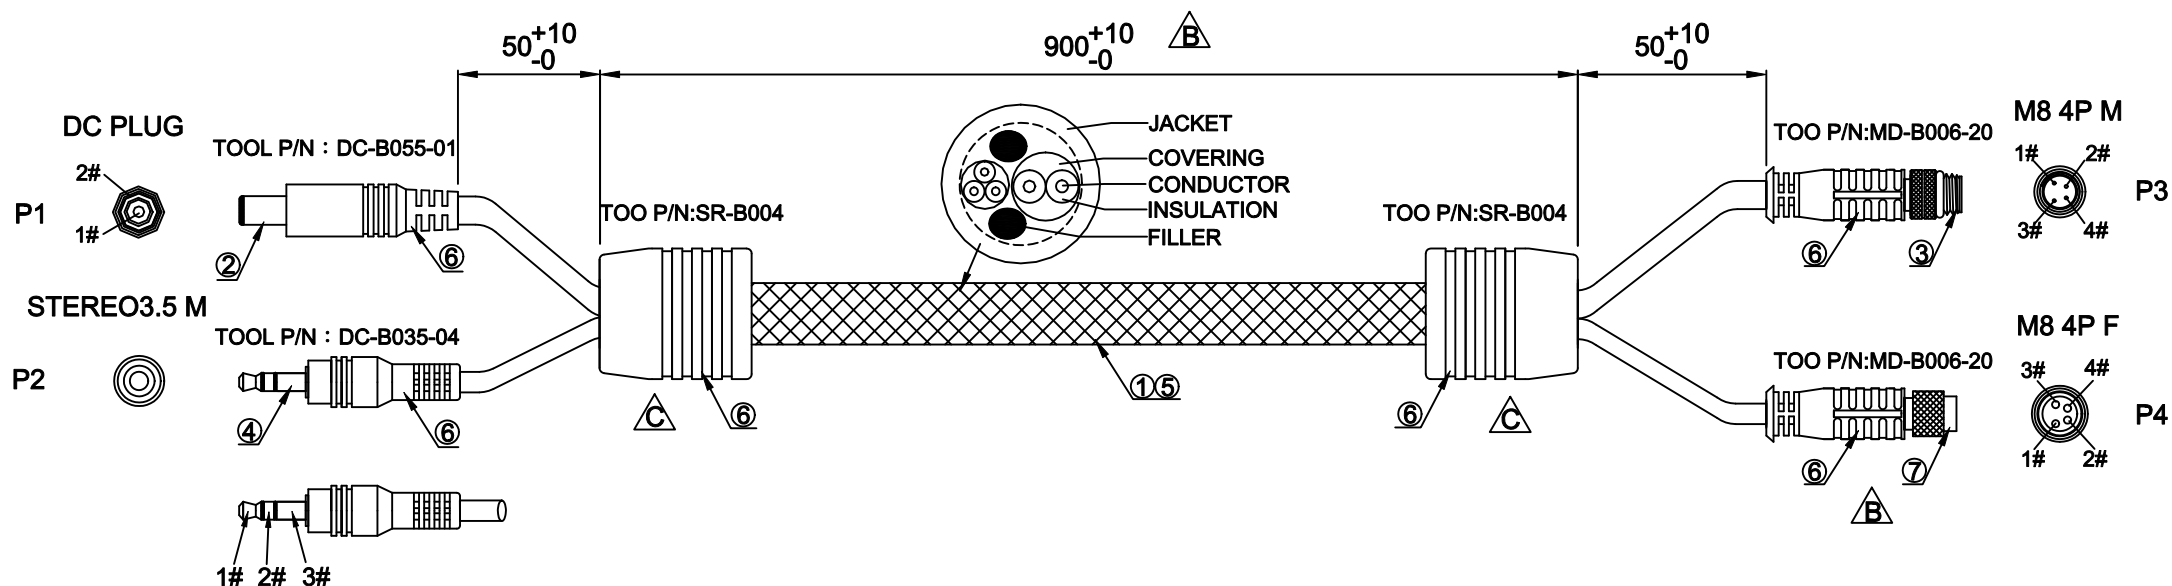


## PIN ASSIGNMENT

| P1        | P3 | P2 | P4        |
|-----------|----|----|-----------|
| (18AWG) 1 | 1  | 1  | 1 (24AWG) |
| (18AWG) 2 | 2  | 2  | 2 (24AWG) |
|           |    | 3  | 3 (24AWG) |

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN.  
DC 300V 0.01sec.
  - (c). CONTACT RESISTANCE: 3 ohm MAX. 
3. CONNECTORS PULL TEST: 3KG/Min.
4. CABLE ASSEMBLY LENGTH GREATER THAN OR EQUAL TO 1000MM, TOLERANCE +20MM, -0MM  
LESS THAN 1000MM, TOLERANCE +10MM, -0MM.
5. SAFETY COMPLIANCE: UL.

|      |     |                                                                                           |                                                                                       |
|------|-----|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 7    | 1   | A0681  | M8 4P FEMALE BALCK INSULATOR,SOLDER TYPE.                                             |
| 6    |     | G0001                                                                                     | ALL CONNECOR OVERMOLD BLACK PVC.                                                      |
| 5    | 1   |                                                                                           | BRAID WIRE:BLACK BRAID OD:12.0MM                                                      |
| 4    | 1   | A0063                                                                                     | STEREO 3.5*26.5MM MALE NICKEL PLANTED.                                                |
| 3    | 1   | A0597                                                                                     | M8 4P MALE BLACK INSULATOR SOLDER TYPE.                                               |
| 2    | 1   | A0335                                                                                     | DC 5.5*2.1MM MALE BLACK INSULATOR NICKEL PLANTED.                                     |
| 1    | 1   |                                                                                           | (18AWG*2C+PVC OD:5.5MM)+(24AWG*3C+PVC OD:4.0MM )+T OD:12.0MM BLACK PVC JACKET UL2464. |
| ITEM | QTY | PART NUMBER                                                                               | DESCRIPTION                                                                           |

|          |                   |            |                                                                                       |                                                                                                                                 |       |        |         |
|----------|-------------------|------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------|--------|---------|
| UNIT     | mm                | Projection |  |  Seconn International Enterprise Co., Ltd. |       |        |         |
| DRAWN    | <i>Lu dongfu</i>  | SCALE      | FREE                                                                                  | TITLE                                                                                                                           |       |        |         |
| CHECK,BY | <i>Cao jiawei</i> | REV        | C                                                                                     | (M8-4P M/DC PLUG)+(M8-4P F/STEREO 3.5 M)                                                                                        |       |        |         |
| APP,BY   | <i>Mr.Huang</i>   | DATE       | 2015/08/14                                                                            | TOLERANCES                                                                                                                      |       |        |         |
| DWG NO.  | SE-S-0222         |            |                                                                                       | X.= ±                                                                                                                           | .X= ± | .XX= ± | .XXX= ± |
| PART NO. |                   |            |                                                                                       | SHEET                                                                                                                           | 1/1   | SIZE   | A4      |