
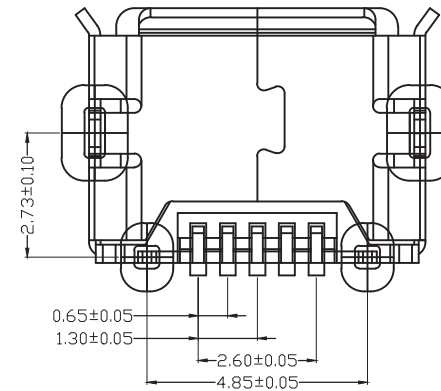
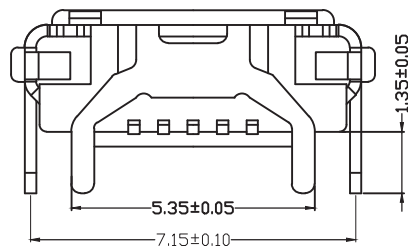
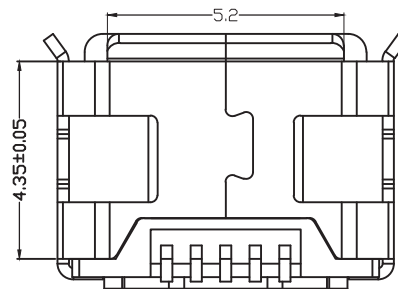

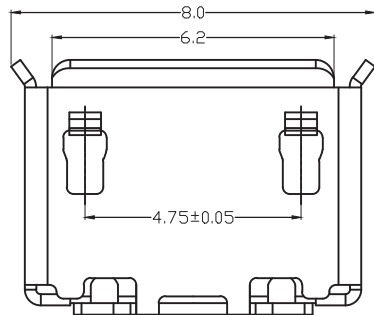


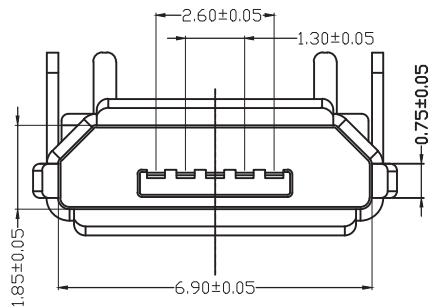

RECOMMENDED PCB LAYOUT

Note:

1.Specification:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 1.3 Contact resistance: 50 mW Max.
- 1.4 Insulation resistance: 100 MW Min.
- 1.5 Total mating force: 3.57 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
- 1.7 Temperature range: -30°C~80°C

3	SHELL	copper alloy	T=0.25	NICKEL PLATED OVERALL	1
2	TERMINAL	copper alloy	T=0.20	Sn 80U"+ Au G/F	5
1	HOUSING	LCP	—	BLACK UL94-V0	1
NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY

Se Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
x. = ± 0.38	x.° = ± 3.0°		UNIT	Micro USB 5 Pin Female B Type Dip1.35 (7.15x5.35) Connector			
x.x = ± 0.30	x.° = ± 2.0°						
x.xx = ± 0.20	.xx° = ± 1.0°						
x.xxx = ± 0.10	.xxx° = ± 0.5°		mm				
DRAWN	ANGEL	DATE	2013/08/13	PART NO.	MCUSB-S05G269		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0