


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/10/09	

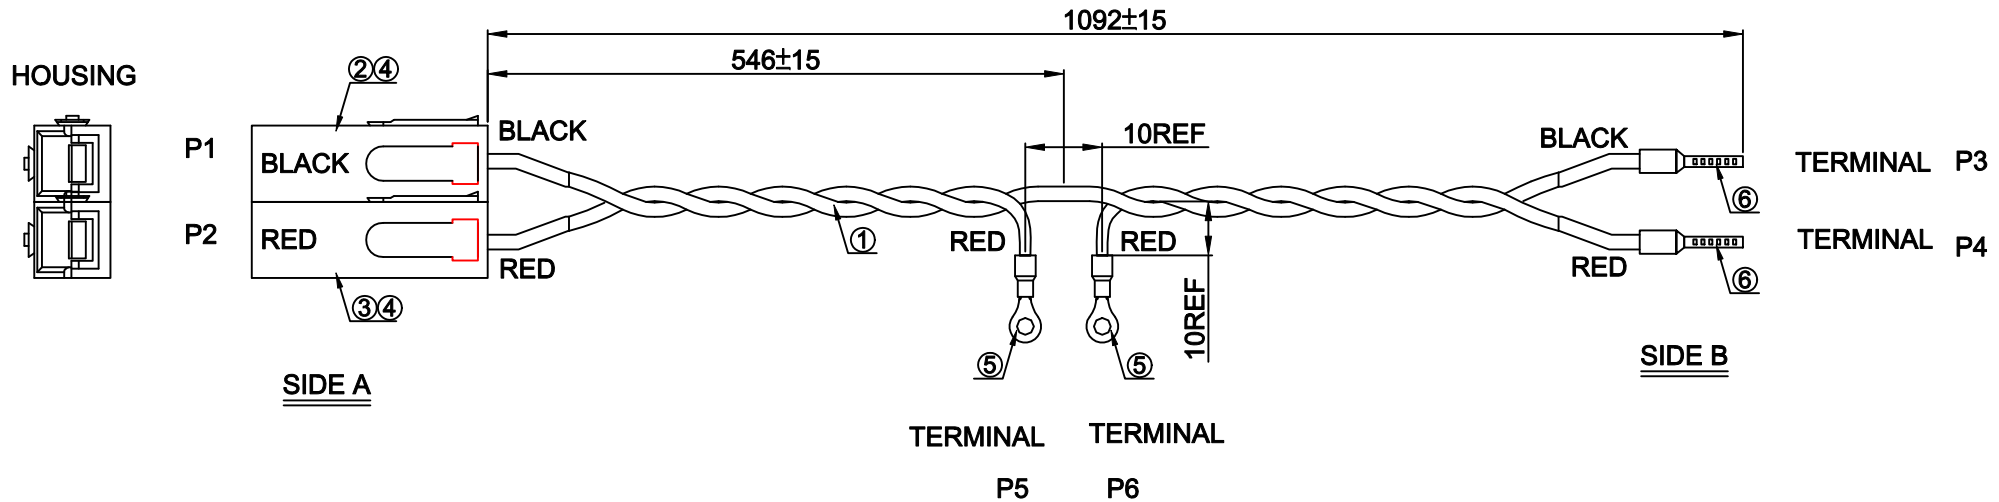

PIN ASSIGNMENT

P1	HOUSING	— BLACK —	TERMINAL	P3
P2	HOUSING	— RED —	TERMINAL	P5
P6	TERMINAL	— RED —	TERMINAL	P4

ITEM	QTY	PART NUMBER	DESCRIPTION
6	2		Black insulated cord-end terminal L=12MM With AWG 16 Wire WAGO:216-224 Local CNXI:HE1512.
5	2		AMP:34120 Local Red pvc insulation ring terminal ID*OD:3.7*6.6mm With wire#16 HRV1.25-3.7M.
4	2		CONTACT,PWR LK,SRS1,STRIP, CRMP-53892-2 Local.
3	1		HSG ASSY ,PWR LK,SRS1,1POS,RED AMP:53894-4 Local.
2	1		HSG ASSY ,PWR LK,SRS1,1POS,BLK AMP:53894-2 Local.
1	3		UL1015 AWG16 OD:3.1mm PVC INSULATION COLOR:SEE WIRE LIST.

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:20 Mohm MIN.
 DC 300V 0.01sec.
 (c). CONTACT RESISTANCE:3 ohm MAX.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Lu dongfu</i>	SCALE	FREE	TITLE				
CHECK,BY	<i>Caojiawei</i>	REV	A	2*HOUSING/2*TERMINAL+TERMINAL/TERMINAL				
APP,BY	<i>Mr. Huang</i>	DATE	2015/10/09	TOLERANCES				
DWG NO.	SE-S-0233			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	8802	SHEET	1/1	SIZE	A4			