

- Voltage rating: 250V AC(RMS) or DC
- Dielectric Strength: 1500V AC/minute
- Current rating:

| Wire size | # 20 | # 22 | # 24 | # 26 | # 28 | # 30 |
|-----------|------|------|------|------|------|------|
| Ampere    | 5 A  | 5 A  | 4 A  | 3 A  | 2 A  | 1 A  |

- Material: Phosphor bronze
- Finished: Tin-plated or Gold flash
- Used in SECONN 3025-N, 3025-xxS series housings
- Wire range: AWG #20 ~ #30
- Thickness: 0.2mm

## Ordering Information



| Part No. | Finished   | Wire size     |
|----------|------------|---------------|
| 3030T1   | Tin-plated | #26 ~ #30 AWG |
| 3030T2   |            | #20 ~ #24 AWG |
| 3030TG1  | Gold flash | #26 ~ #30 AWG |
| 3030TG2  |            | #20 ~ #24 AWG |

**S T F - 3030 T2**

Seconn  
Terminal  
F: Female  
M: Male

Tin-Plated  
#20-#24 AWG

- Insulation resistance: 1000M $\Omega$  min.
- Contact resistance: 10m $\Omega$  max.
- Temperature rise: 30°C max.  
(carry rated current load)
- UL file No.: E114003
- CSA file No.: LR86545

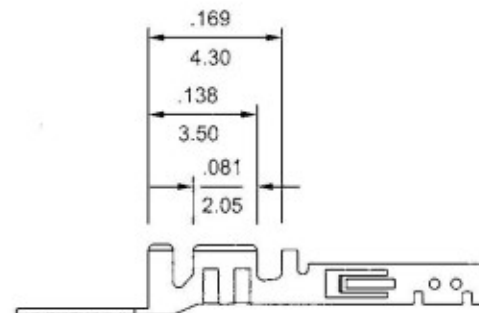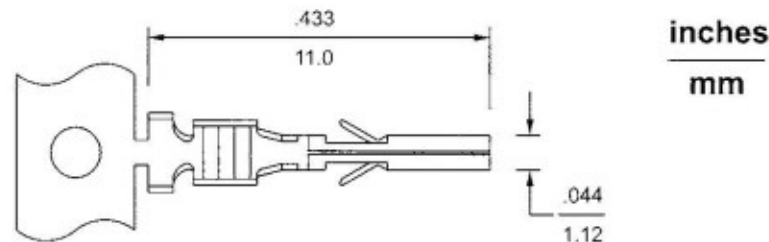

|            |    |      |    |                                           |
|------------|----|------|----|-------------------------------------------|
| UNIT       | mm |      |    | Seconn International Enterprise Co., Ltd. |
| TOLERANCES |    |      |    | TITLE                                     |
|            |    |      |    | .118" (3.0mm) Female Crimp Terminal       |
|            |    |      |    | PART NO. STF-3030T2                       |
| DRAWN      |    | DATE |    |                                           |
| SCALE      |    | SIZE | A4 | SHEET 1/1 REV                             |