



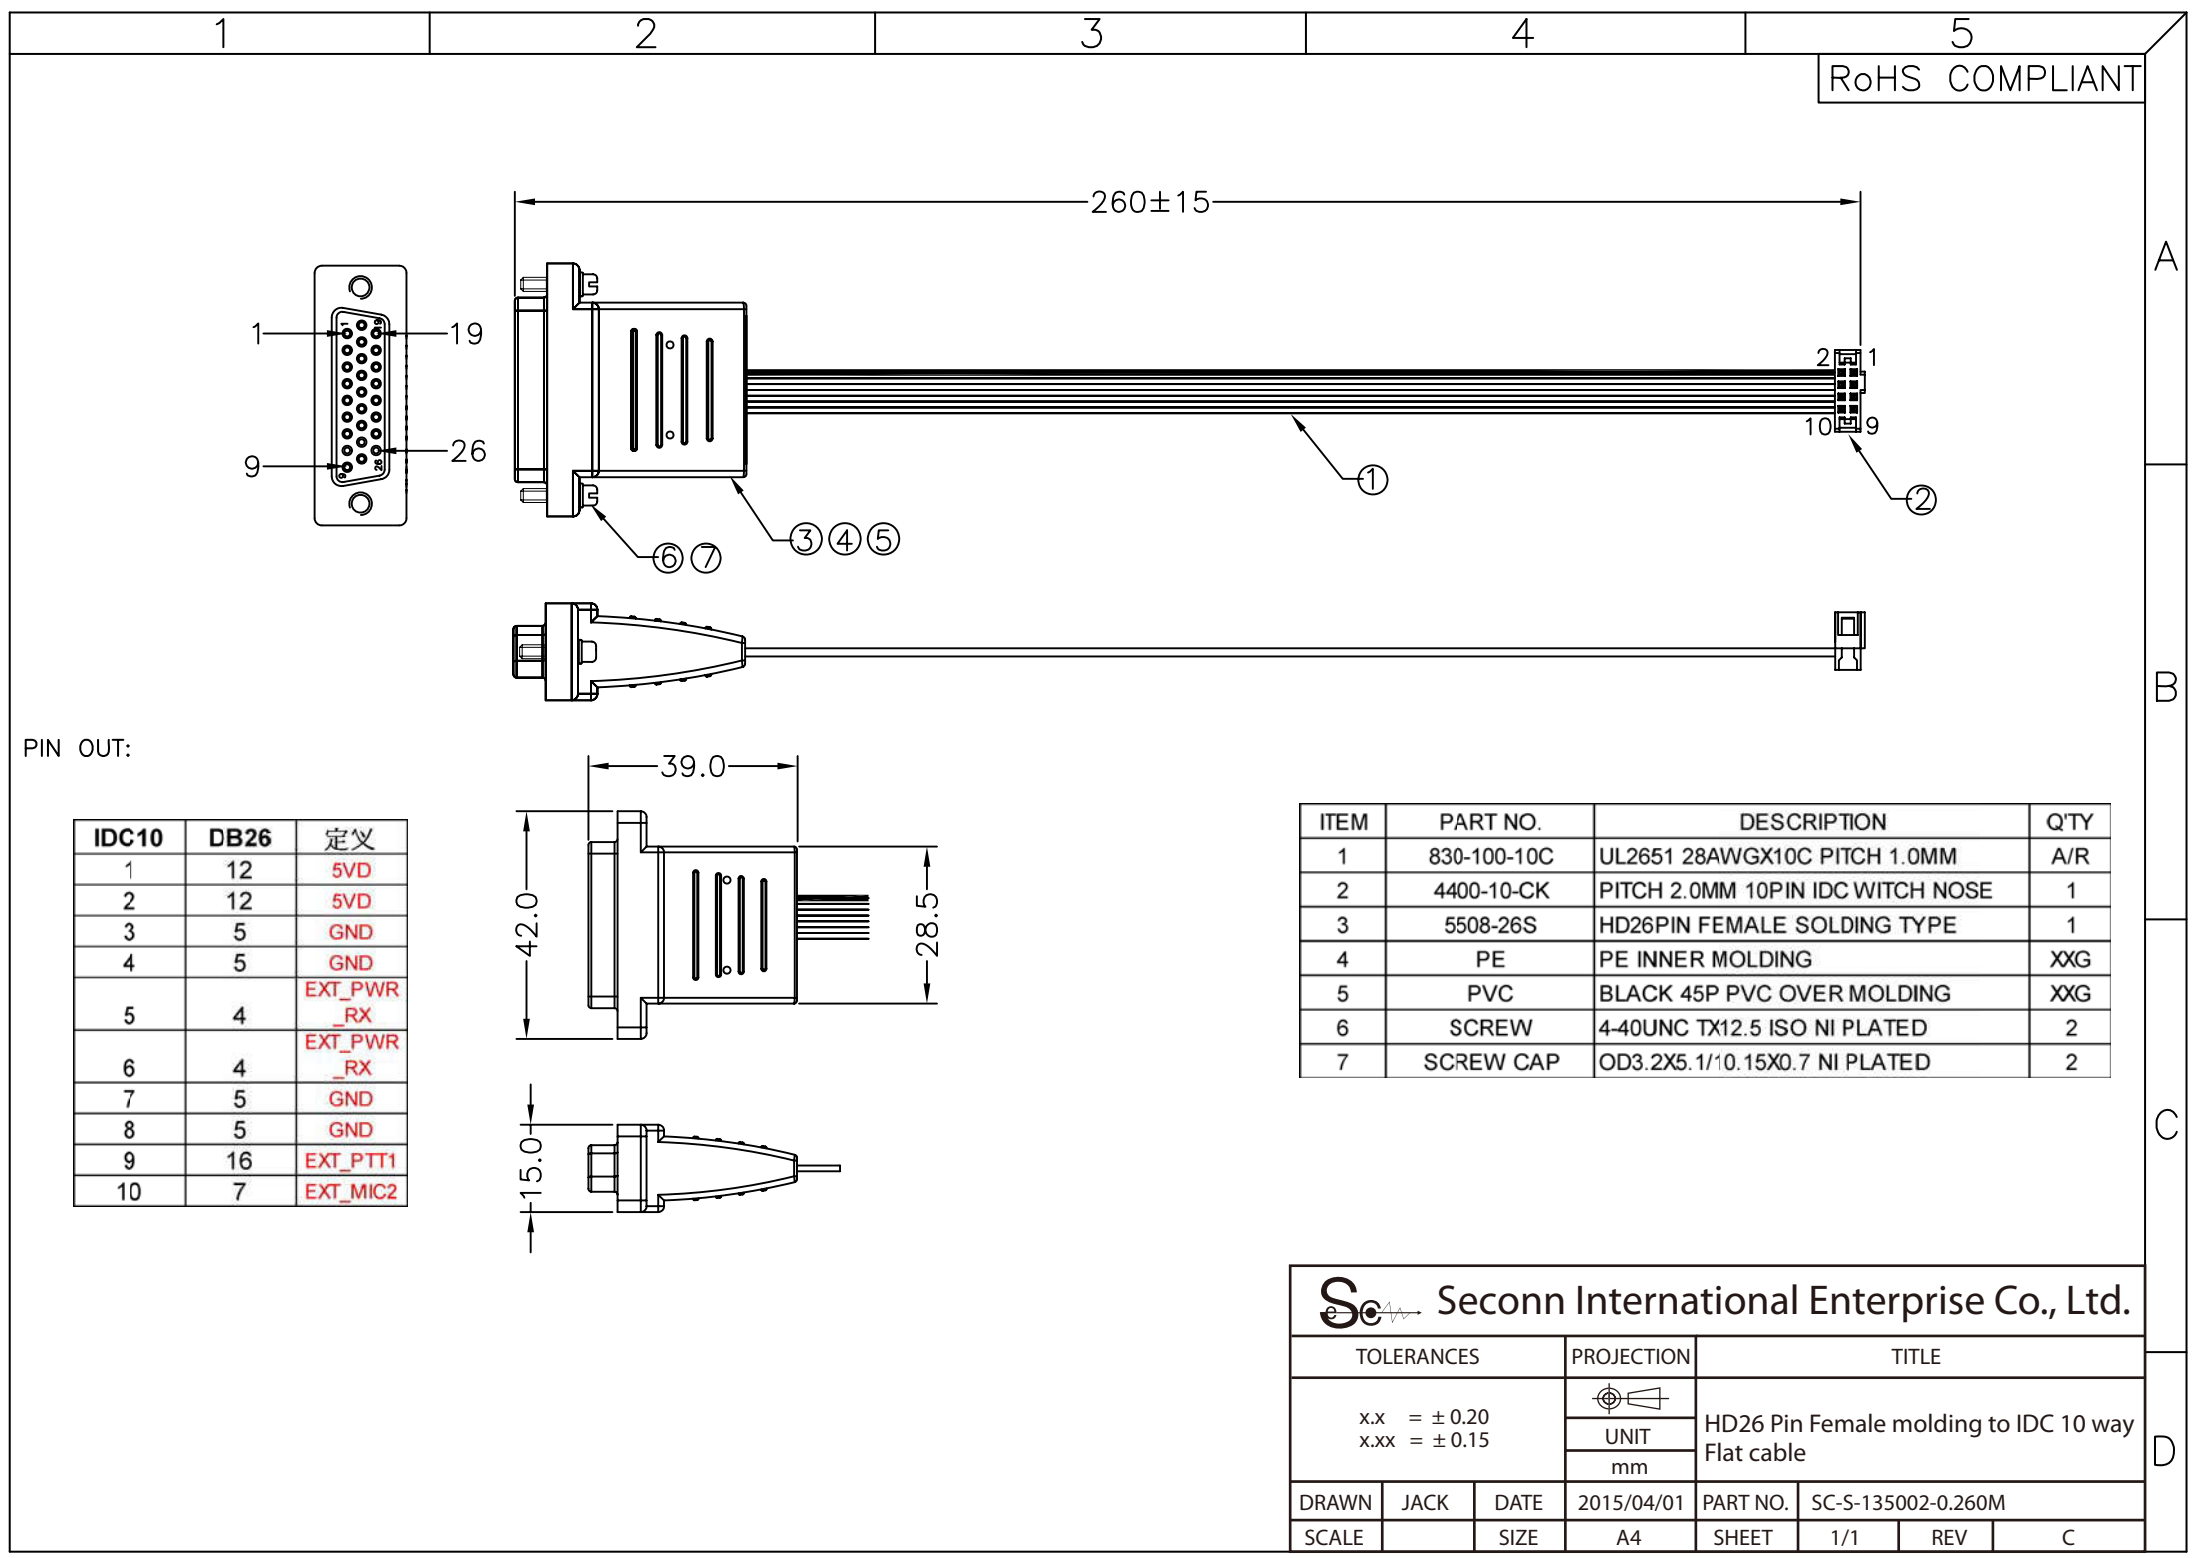


RoHS COMPLIANT

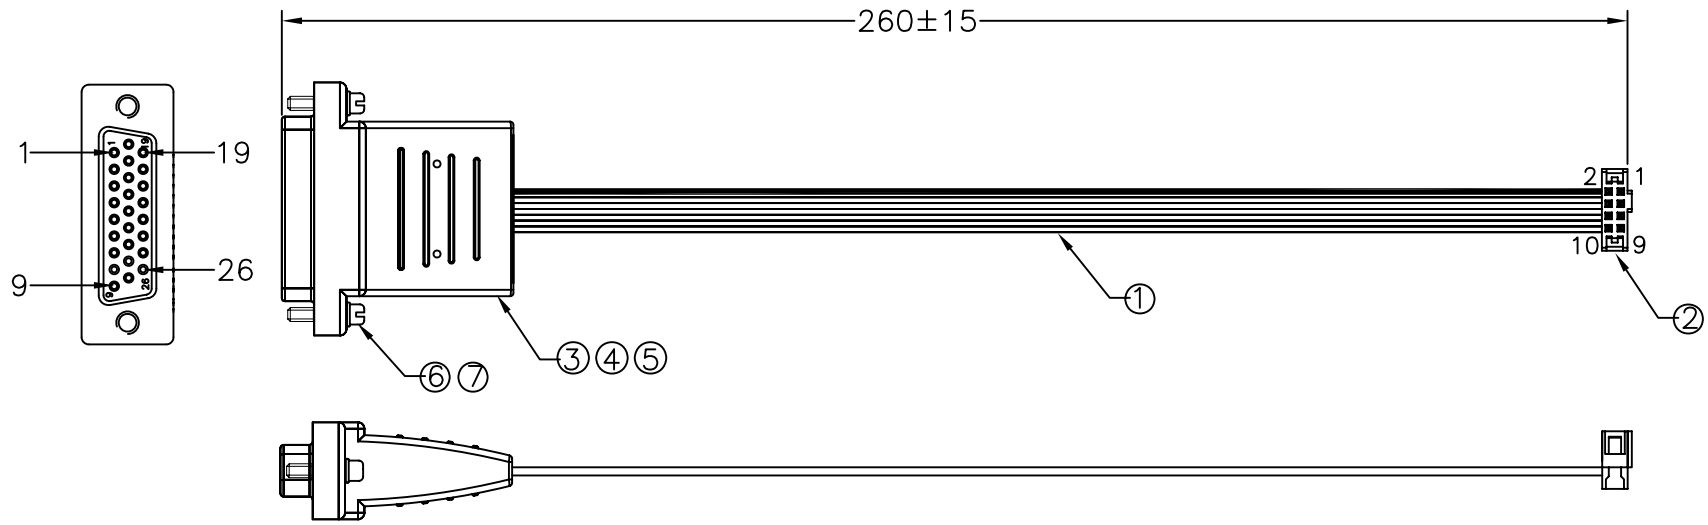

PIN OUT:

IDC10	DB26	定义
1	12	5VD
2	12	5VD
3	5	GND
4	5	GND
5	4	EXT_PWR_RX
6	4	EXT_PWR_RX
7	5	GND
8	5	GND
9	16	EXT_PTT1
10	7	EXT_MIC2

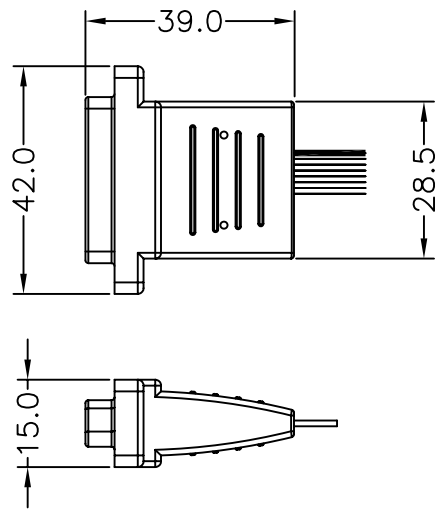

ITEM	PART NO.	DESCRIPTION	Q'TY
1	830-100-10C	UL2651 28AWGX10C PITCH 1.0MM	A/R
2	4400-10-CK	PITCH 2.0MM 10PIN IDC WITCH NOSE	1
3	5508-26S	HD26PIN FEMALE SOLDERING TYPE	1
4	PE	PE INNER MOLDING	XXG
5	PVC	BLACK 45P PVC OVER MOLDING	XXG
6	SCREW	4-40UNC TX12.5 ISO NI PLATED	2
7	SCREW CAP	OD3.2X5.1/10.15X0.7 NI PLATED	2

Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.20 x.xx = ± 0.15				HD26 Pin Female molding to IDC 10 way Flat cable			
			UNIT				
			mm				
DRAWN	JACK	DATE	2015/04/01	PART NO.	SC-S-135002-0.260M		
SCALE		SIZE	A4	SHEET	1/1	REV	C