


- UL 94V-2 nylon 66
- Available in 2 to 24 circuit
- Insulation Resistance: 1000MΩ min.
- Dielectric strength: 1500V AC

- Positive housing locks
- Fully isolated terminals
- Low engagement force terminals
- Wire to wire

- Wire to board (vertical header)
- Wire to board (right angle header)

Dimensional Information - in. (mm)


Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		.213 (5.4)	14	.992 (25.2)	1.205 (30.6)
4	.165 (4.2)	.378 (9.6)	16	1.157 (29.4)	1.370 (34.8)
6	.331 (8.4)	.543 (13.8)	18	1.323 (33.6)	1.535 (39.0)
8	.496 (12.6)	.709 (18.0)	20	1.488 (37.8)	1.701 (43.2)
10	.681 (16.8)	.874 (22.2)	22	1.654 (42.0)	1.866 (47.4)
12	.827 (21.0)	1.039 (26.4)	24	1.819 (46.2)	2.031 (51.6)

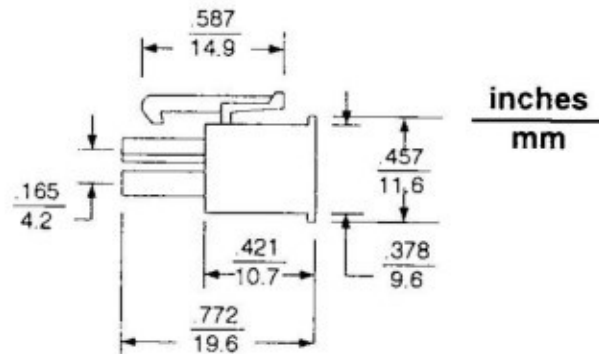

9357-04

• Current Rating & Wire Size:

Wire Size AWG	Rated Voltage	Circuits			
		2	4 - 6	8 - 10	12 - 24
# 18	250V	9A	8A	7A	6A
# 20		7A	6A	5A	5A
# 22		5A	4A	4A	4A
# 24		4A	3A	3A	3A

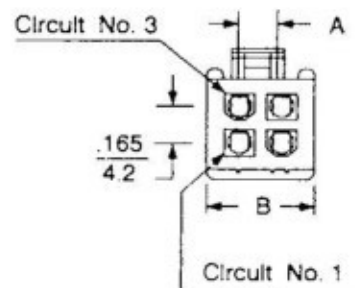

SHR -9357 - 2 XX

Secom
 P: Power Header
 H: Housing
 V: Vertical
 R: Receptacle
 P: Plug

1: Single Row
 2: Dual Row

Number of Circuit

UNIT	mm			Se - Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
				.165" (4.2mm) Receptacle Housing			
				PART NO		SHR-9357-2XX	
DRAWN		DATE		SHEET	L/1	REV	
SCALE		SIZE	A4				