



ROHS COMPLIANT


DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2015/10/15	

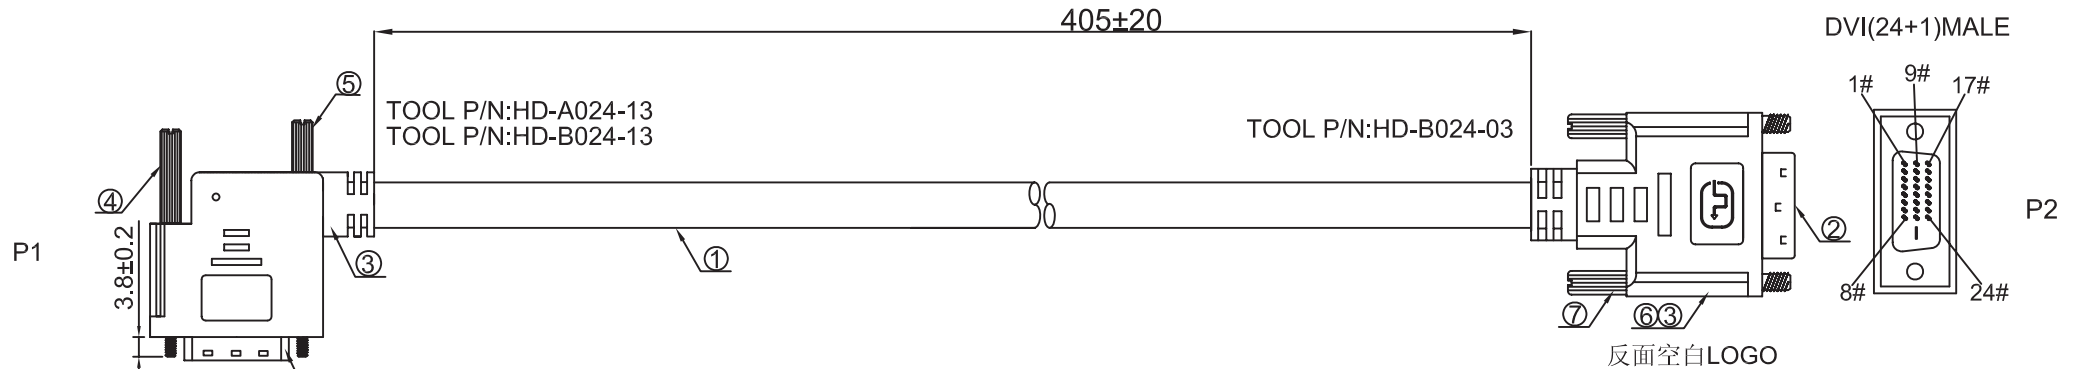


DVI(24+1)MALE

DVI MALE SCREW

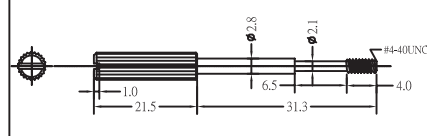


DVI MALE SCREW

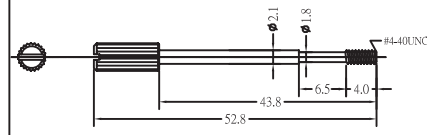

PIN ASSIGNMENT

P1		P2
24	WHITE	24
23	GREEN	23
22		22
21	WHITE	21
20	BLUE	20
19		19
18	WHITE	18
17	RED	17
16	RED	16
15	VIOLET	15
14	WHITE	14
13	WHITE	13
12	BROWN	12
11		11
10	WHITE	10
9	ORANGE	9
7	YELLOW	7
6	ORANGE	6
5	WHITE	5
4	YELLOW	4
3		3
2	WHITE	2
1	BLACK	1
S		S

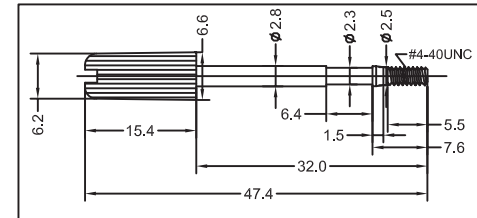

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm.
- 两端插头成型内模后需360度全包铜箔环焊

ITEM	QTY	PART NUMBER	DESCRIPTION
8	2		DUST CAP
7	2	C0019	DVI-SCREW-BLACK-E32-Ni
6	1	D0014	DVI-PLATED-M-OD10.0MM
5	1	C0197	SCREW:#4-40unc 5.0*52.8 L=9MM NICKEL PLATED.
4	1	C0196	SCREW:#4-40UNC 5.0*52.8 L=21.5MM NICKL PLATED
3		G0001	ALL CONNECTORS OVERMOLD BLACK PVC 50P.
2	2	A0795	DVI(24+1)MALE,SOLDER TYPE PIN GOLD PLATED 1U" WHITE
1	1	E1065	(30AWG*1P+A+D+M)*7+30AWG*1P+30AWG*5C+AB OD:8.5MM UL20276 BLACK PVC JACKET

Seconn International Enterprise Co., Ltd.

DRAW, BY: <i>Zou Jianhui</i>	REV.	P/N: NO: SE-S-0237A		
	A	DVI (24+1) Male 90 degree to Male 180 degree cable UL20276		
CHECK, BY:	SCALE	UNIT	SHEET	
APP, BY:	FREE	mm	1/1	