



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/07/27	
B	CHANGE DRAWING	2016/08/02	

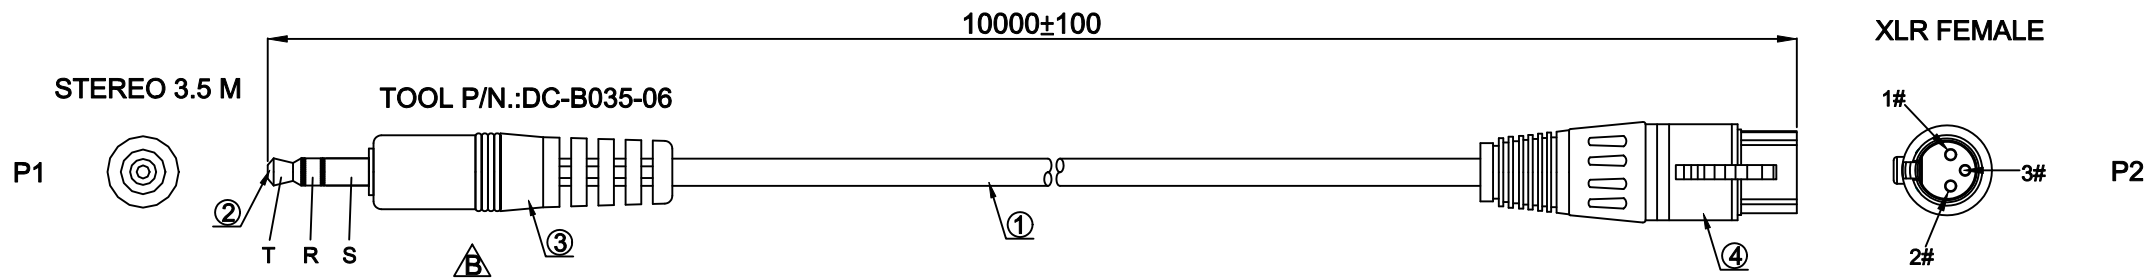

- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.08sec.
 - (c). CONTACT RESISTANCE:3 ohm MAX.

PIN ASSIGNMENT

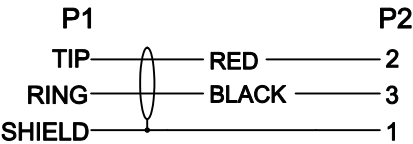

5	1		BOX:L=240*W=70*H=45MM.
4	1	A0839	XLR 3P FEMALE ASSEMBLY TYPE.
3		G0001	STEREO3.5 OVERMOLD BLACK PVC.
2	1	A0063	STEREO3.5 MALE NICKEL PLATED.
1	1	E0170	28AWG*2C+SP OD:3.0MM BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE				
CHECK,BY	<i>Bao jiawei</i>	REV	B	STEREO3.5 MALE/XLR FEMALE				
APP,BY	<i>Mr.Huang</i>	DATE	2016/07/27	TOLERANCES				
DWG NO.	SE-S-0271			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	1WMICROM1V01			SHEET	1/1	SIZE	A4	