


- UL 94V-2 nylon 66
- Available in 2 to 24 circuit
- Insulation Resistance: 1000M Ω min.
- Dielectric strength: 1500V AC

- Positive housing locks
- Fully isolated terminals
- Low engagement force terminals
- Wire to wire

- Wire to board (vertical header)
- Wire to board (right angle header)

Housing

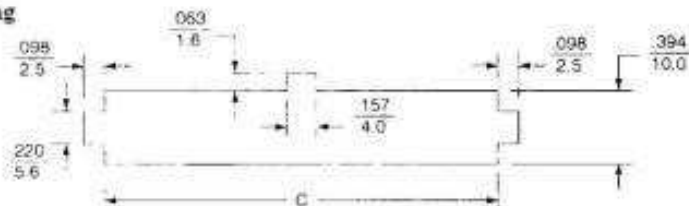


Mounting Hole Details for 9358-N Housing (Dual Row)
Max. Panel Thickness: 2.54mm

Dimensional Information - in. (mm)


Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	.213 (5.4)	.228 (5.8)	.228 (5.8)	14	.992 (25.2)	1.205 (30.6)	1.220 (31.0)
4	.165 (4.2)	.378 (9.6)	.394 (10.0)	16	1.157 (29.4)	1.370 (34.8)	1.386 (35.2)
6	.331 (8.4)	.543 (13.8)	.559 (14.2)	18	1.323 (33.6)	1.536 (39.0)	1.551 (39.4)
8	.496 (12.6)	.709 (18.0)	.724 (18.4)	20	1.488 (37.8)	1.701 (43.2)	1.717 (43.6)
10	.661 (16.8)	.874 (22.2)	.890 (22.6)	22	1.654 (42.0)	1.866 (47.4)	1.882 (47.8)
12	.827 (21.0)	1.039 (26.4)	1.055 (26.8)	24	1.819 (46.2)	2.031 (51.6)	2.047 (52.0)

• Current Rating & Wire Size:

Wire Size AWG	Rated Voltage	Circuits			
		2	4 - 6	8 - 10	12 - 24
# 18	250V	9A	8A	7A	6A
# 20		7A	6A	5A	5A
# 22		5A	4A	4A	4A
# 24		4A	3A	3A	3A

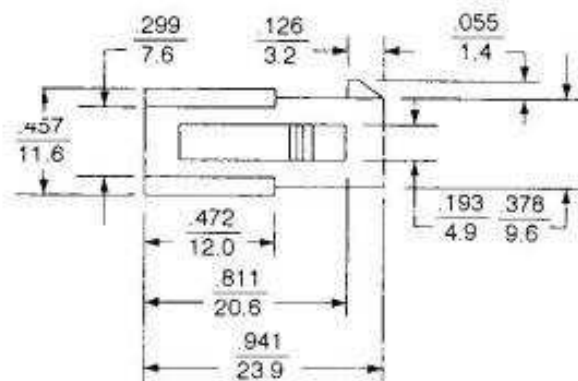

9358-04E
9358-04
(W/O Mtg. Ears)

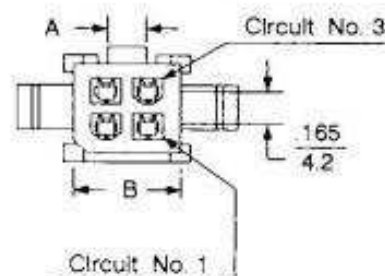

inches
mm

SHR-9358-2XXE

Seconn
P: Power Header
H: Housing

V: Vertical
R: Receptacle
P: Plug

1: Single Row
2: Dual Row

With Mtg.
Ears
Number of Circuit

UNIT	mm	Seconn International Enterprise Co., Ltd.	
TOLERANCES		TITLE	
		.165" (4.2mm) Plug Housing	
DRAWN		DATE	
SCALE		SIZE	A4
PART NO		SHR-9358-2XXE	
SHEET		1/1	REV