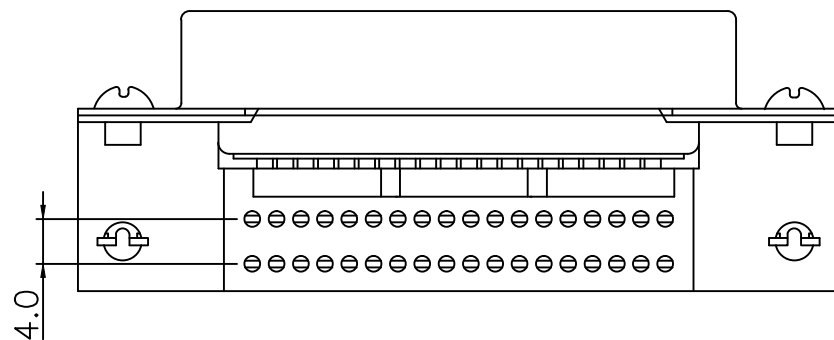
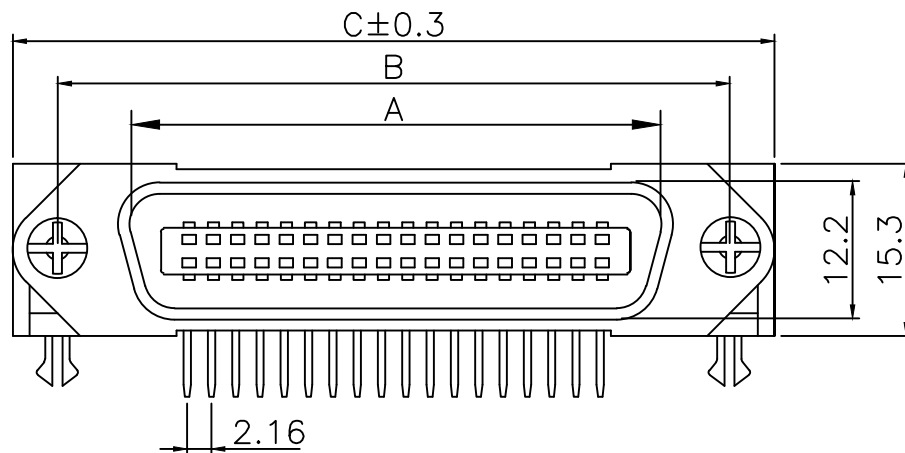



RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

INSULATOR - P.B.T. +30%GLASS FIBER
UL 94V-0
CONTACT - PHOSPHOR BRONZE
SHELL FINISH - STEEL NICKEL PLATED
HOOD - STEEL
PLATING - CONTACT
1. GOLD FLASH (COMPLETE)
2. SELECTIVE GOLD OVER NICKEL PLATED
(CONTACT AREA) TIN OVER NICKEL PLATED (TAIL AREA)
- SHELL
NICKEL OVER COPPER PLATED
- HOOD
NICKEL OVER COPPER PLATED

ELECTRICAL CHARACTERISTICS

RATING CURRENT : 1 AMP
CONTACT RESISTANCE : < 25 MILLIOHM
INSULATION RESISTANCE : > 1000 MEGOHM AT 500V
DIELECTRIC VOLTAGE : 1000V AT 1 MINUTE
OPERATION TEMPERATURE : -55°C TO +105°C

APPLIED TO WAVE SOLDER CAPABLE TO 240°



POSITION	A	B	C
14M	25.50	36.00	43.90
24M	36.30	46.80	54.70
36M	49.30	59.70	67.70
50M	64.40	74.90	82.80

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x. = ± 0.50 x.x = ± 0.30 Angle $\pm 5.0^\circ$ x.xx = ± 0.20				CENTRONIC PCB Right Angle Male Connector			
			UNIT				
			mm				
DRAWN	JIEN	DATE	2005/12/01	PART NO.	CN-SXXMRD1		
SCALE		SIZE	A4	SHEET	1/1	REV	A