
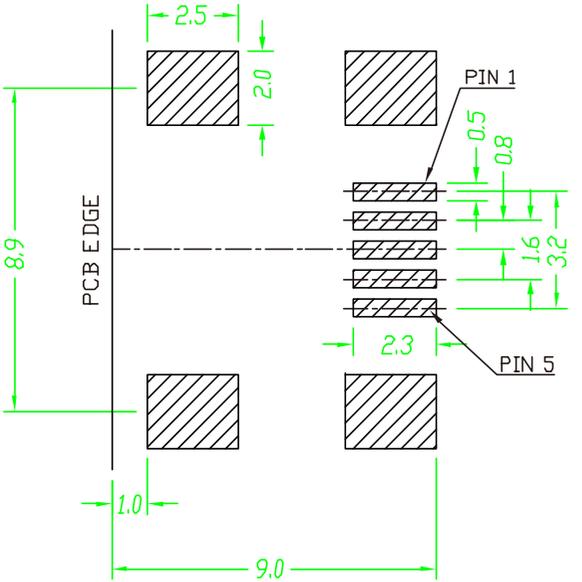
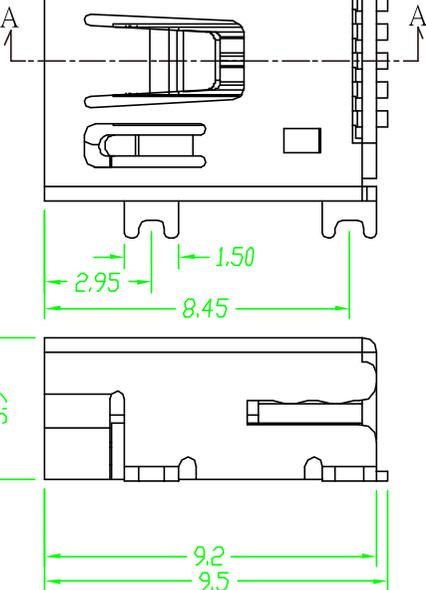


REV	ZONE	REVISION	DATE

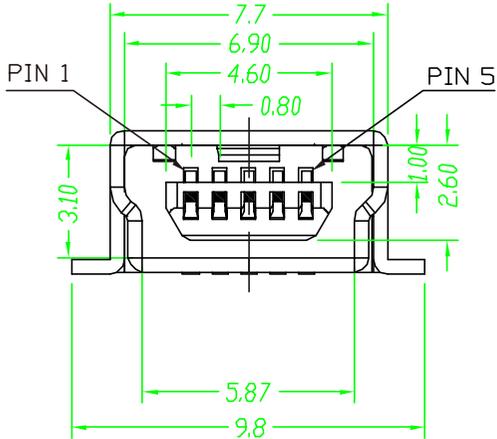

Green Product

RECOMMENDED PCB PATTERN LAYOUT  
(PCB THICKNESS:0.8±0.1)

Specification:  
 Contact Resistance: 50m Ohm Max.  
 Insulation Resistance: 100M Ohm Min. At 500VDC.  
 Rated Voltage And Current: 1A At 30VAC Minimum.  
 Dielectric Withstanding Voltage: 100V AC for 1 Minute  
 Durability (Life Test): 1500 Cycles  
 Insertion Force: 35 Newton Maximum.  
 Extraction Force: 7 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F	BLACK	1	
2	PIN TERM.	PBS T:0.25	GOLD/TIN PLATED	5	Gold: 30u" NI: 40~60u" TIN: 120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.4	NICKEL PLATED	1	Ni: 80~120u"

**Seconn International Enterprise Co., Ltd.**

TOLERANCES			PROJECTION	TITLE			
x.	= ± 0.38			Mini USB B 5 Pin Connector Contact-SMT, Shield-SMT			
x.x	= ± 0.25						
x.xx	= ± 0.13						
x.xxx	= ± 0.05		UNIT				
			mm				
DRAWN	TINA	DATE	2010/04/07	PART NO.	MUSB-SM01-B05(NP)		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0