


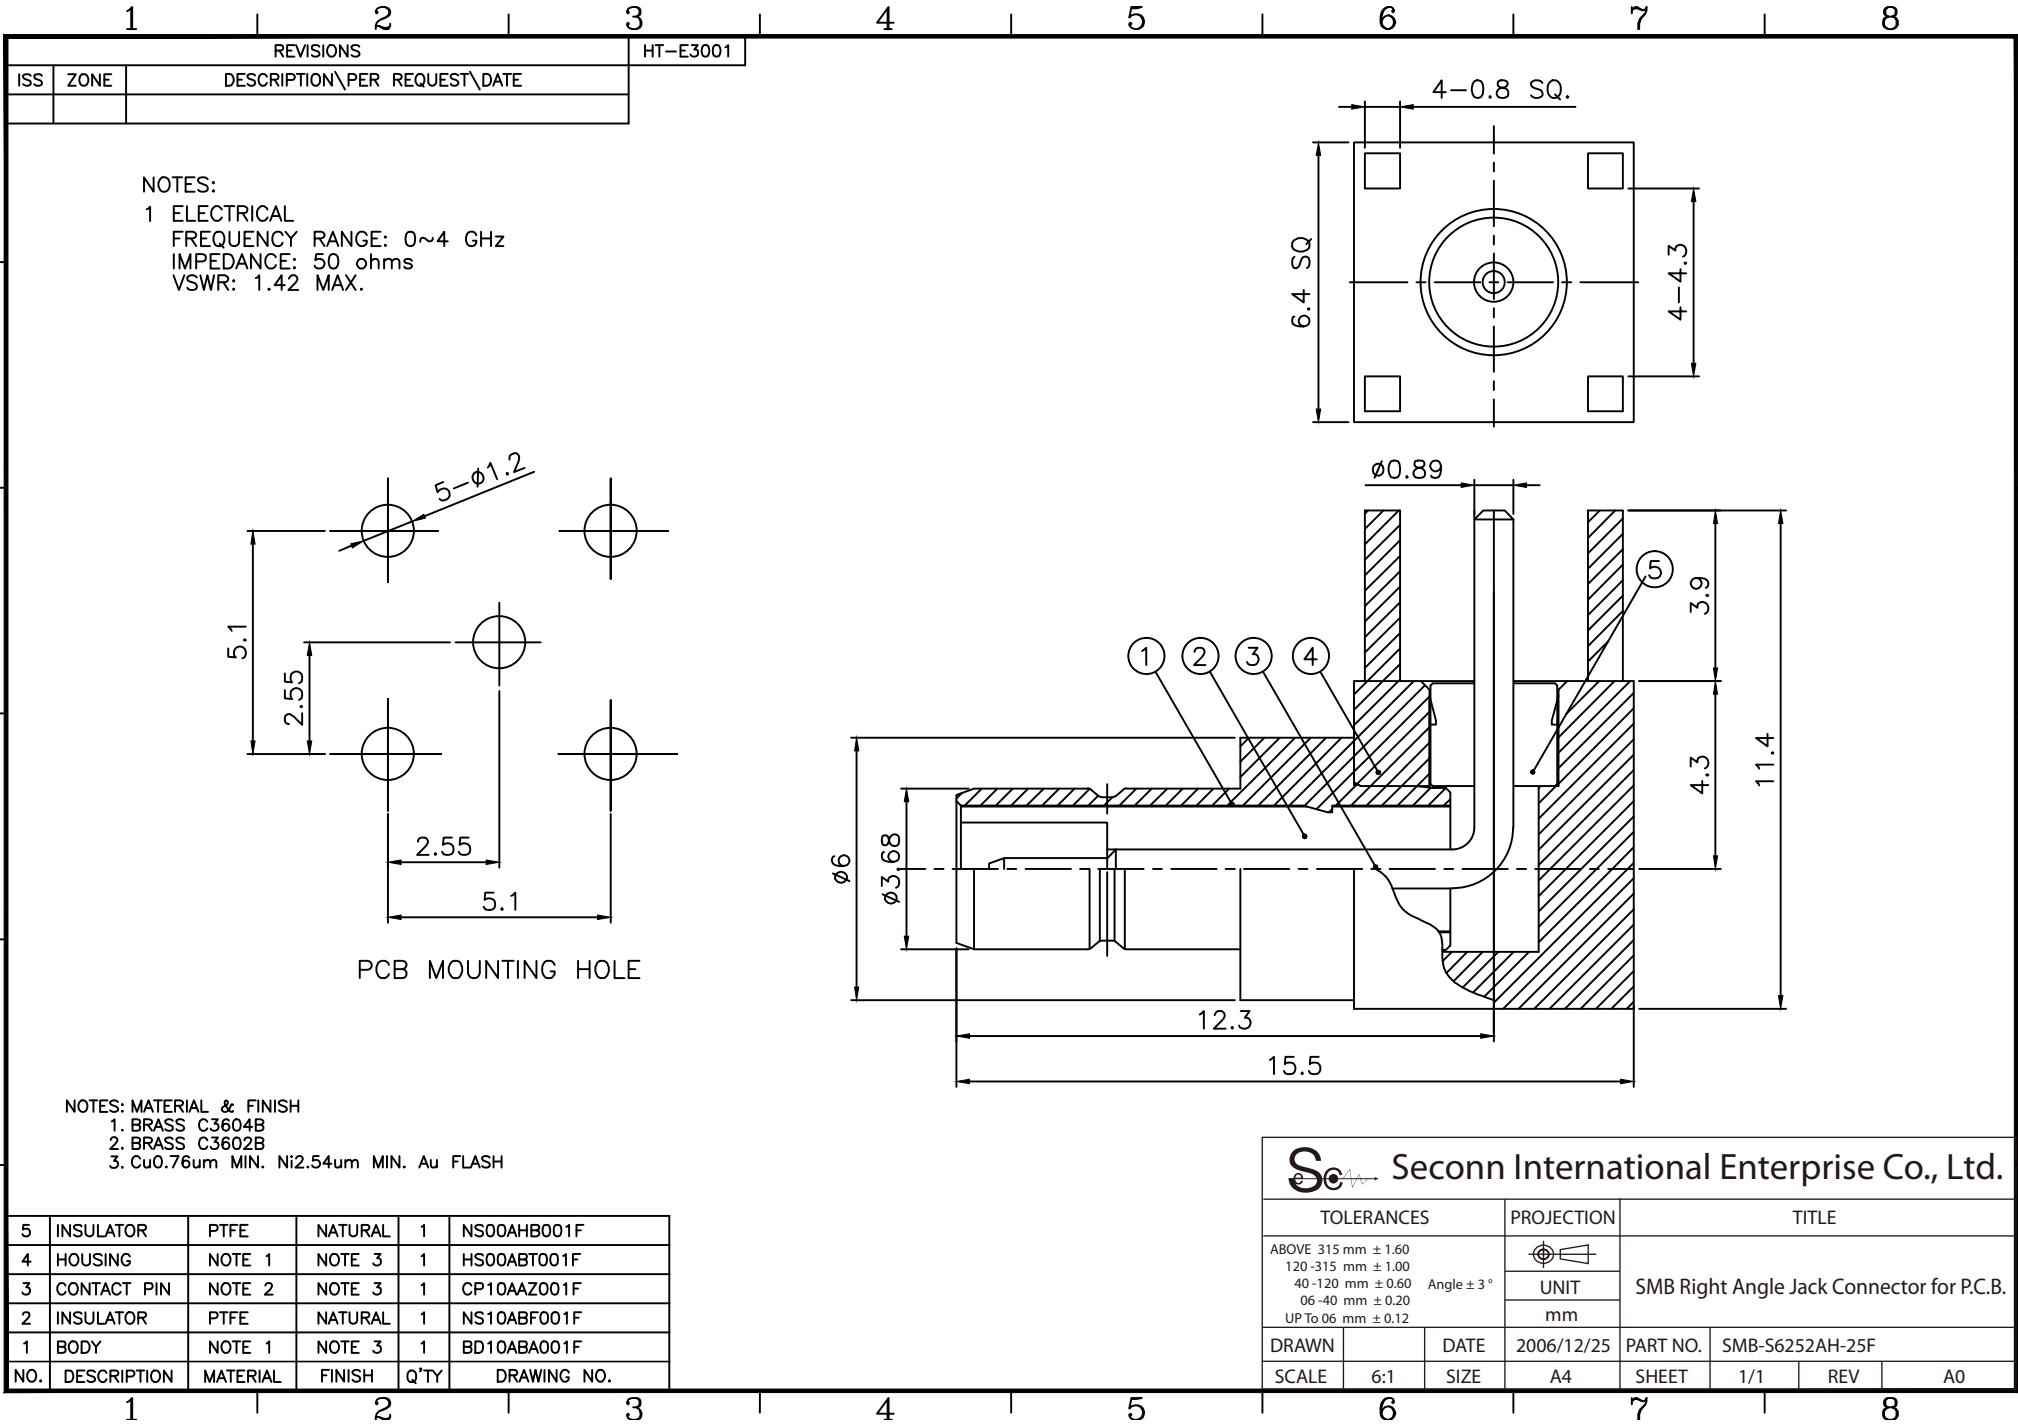

NOTES:
1 ELECTRICAL
FREQUENCY RANGE: 0~4 GHz
IMPEDANCE: 50 ohms
VSWR: 1.42 MAX.

NOTES: MATERIAL & FINISH
1. BRASS C3604B
2. BRASS C3602B
3. Cu0.76um MIN. Ni2.54um MIN. Au FLASH

5	INSULATOR	PTFE	NATURAL	1	NS00AHB001F
4	HOUSING	NOTE 1	NOTE 3	1	HS00ABT001F
3	CONTACT PIN	NOTE 2	NOTE 3	1	CP10AAZ001F
2	INSULATOR	PTFE	NATURAL	1	NS10ABF001F
1	BODY	NOTE 1	NOTE 3	1	BD10ABA001F
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

Se Seconn International Enterprise Co., Ltd.							
TOLERANCES		PROJECTION	TITLE				
ABOVE 315 mm ± 1.60 120-315 mm ± 1.00 40-120 mm ± 0.60 06-40 mm ± 0.20 UP To 06 mm ± 0.12		Angle ± 3°	SMB Right Angle Jack Connector for P.C.B.				
		UNIT					
		mm					
DRAWN		DATE	2006/12/25	PART NO.	SMB-S6252AH-25F		
SCALE	6:1	SIZE	A4	SHEET	1/1	REV	A0