



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/12/27	
B	ADD TUBE	2017/01/18	
C	CHANGE MOLDED	2017/02/13	

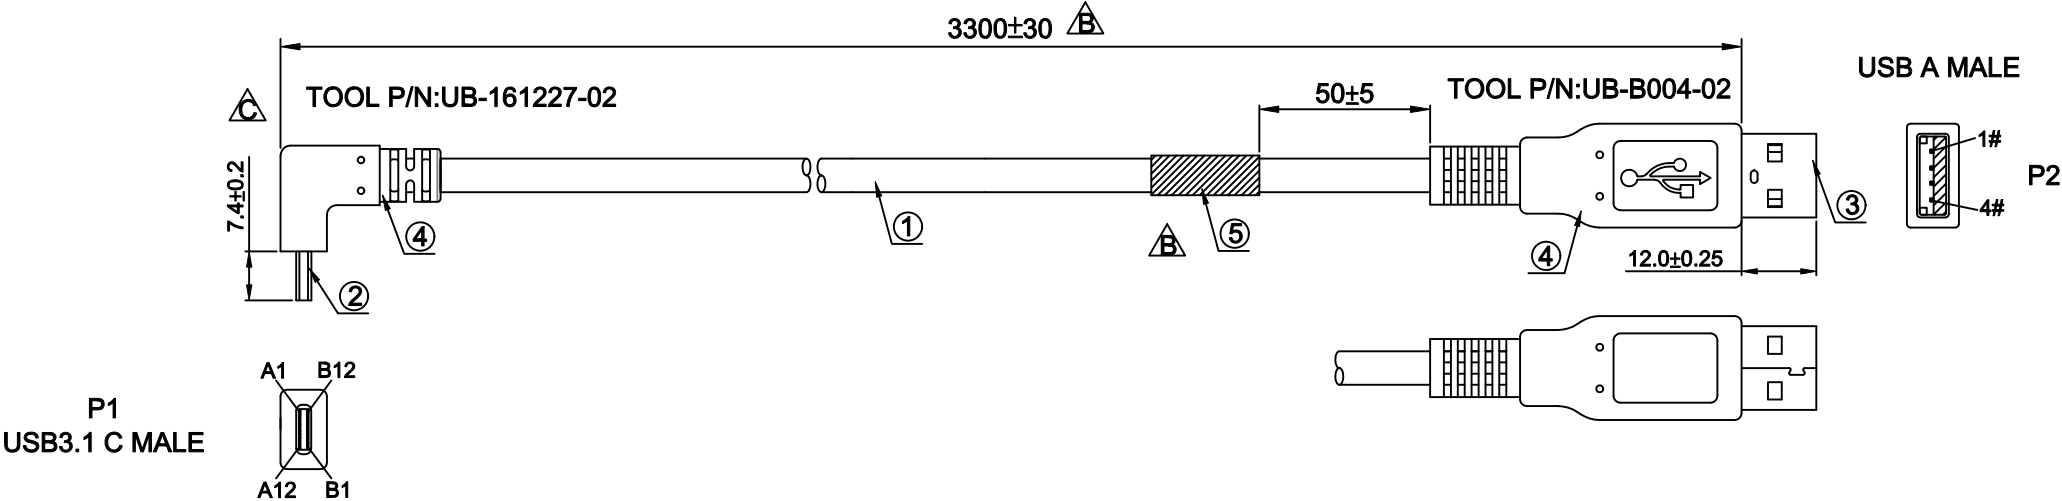

PIN ASSIGNMENT

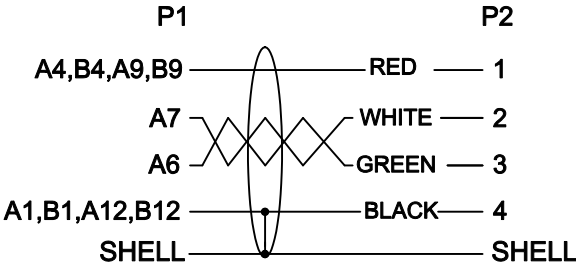

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

5	1		BLACK HEAT SHRINK TUBE.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0182	USB A TYPE, MALE, WHITE INSULATOR, SOLDER TYPE.
2	1		USB3.1 C TYPE MALE SOLDER TYPE. (2.0C-1038-R1)
1	1	E0423	28AWG*1P+20AWG*2C+ADB OD:5.1MM BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE			
CHECK, BY	Bao jiawei	REV	C	90°USB3.1 C MALE/USB A MALE			
APP, BY	Mr. Huang	DATE	2016/12/27	TOLERANCES			
DWG NO.	SE-S-0301			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0301-3.3M			SHEET	1/1	SIZE	A4