


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/12/27	
B	CHANGE DRAWING	2016/12/29	
C	CHANGE MOLDED	2017/02/13	

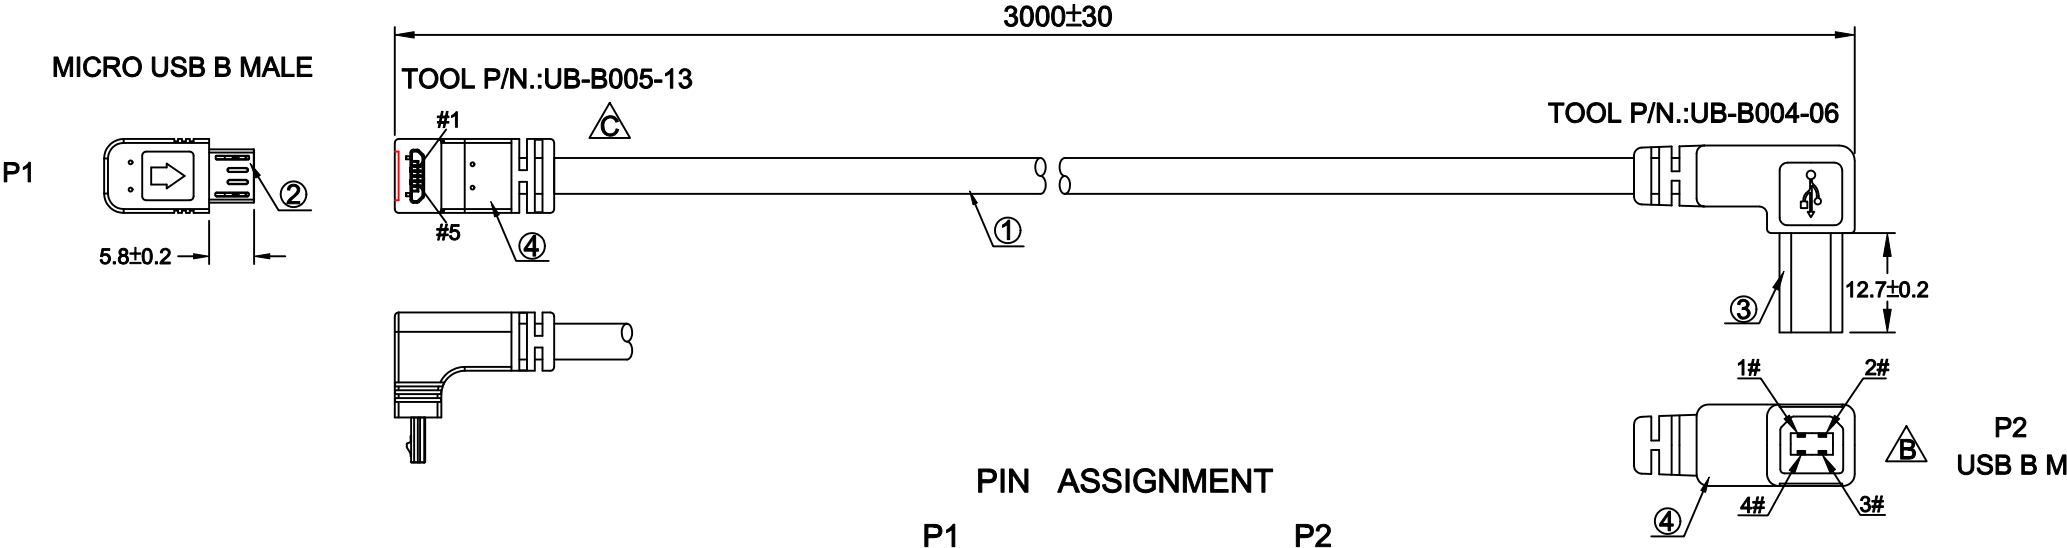

- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0773	USB B MALE,PIN GOLD PLATED 30U" SOLDER TYPE.
2	1	A0625	MICRO USB B ,MALE ,BLACK INSULATOR GOLD PLATED 30U" SOLDER TYPE.
1	1	E0423	28AWG*1PAIR+20AWG*2C +ADB OD:5.1MM BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE			
CHECK,BY	Cao jiawei	REV	C	90°MICRO USB BM/90° USB BM			
APP,BY	Mr. Huang	DATE	2016/12/27	TOLERANCES			
DWG NO.	SE-S-0300			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0300-3M			SHEET	1/1	SIZE	A4