

Features:


- Integrally molded polarization
- Material: UL 94V-0 or UL 94V-2
- Accepts SECCONN 70T-X2L4, 70T Terminals
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090"(0.762 ~ 2.286mm)
- UL file No.: E114003
- CSA file No.: LR86545

**Green
Product**

Specifications:

- Current rating: 11A
- Voltage rating: 600V
- Insulation resistance: 1000M Ω min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

Eng. No.	Part No.	Material
9635H-06009L	9635-06P-V0	UL 94V-0
9635H-06009K	9635-06R-V0	
9635H-06002L	9635-06P	UL 94V-2
9635H-06002K	9635-06R	

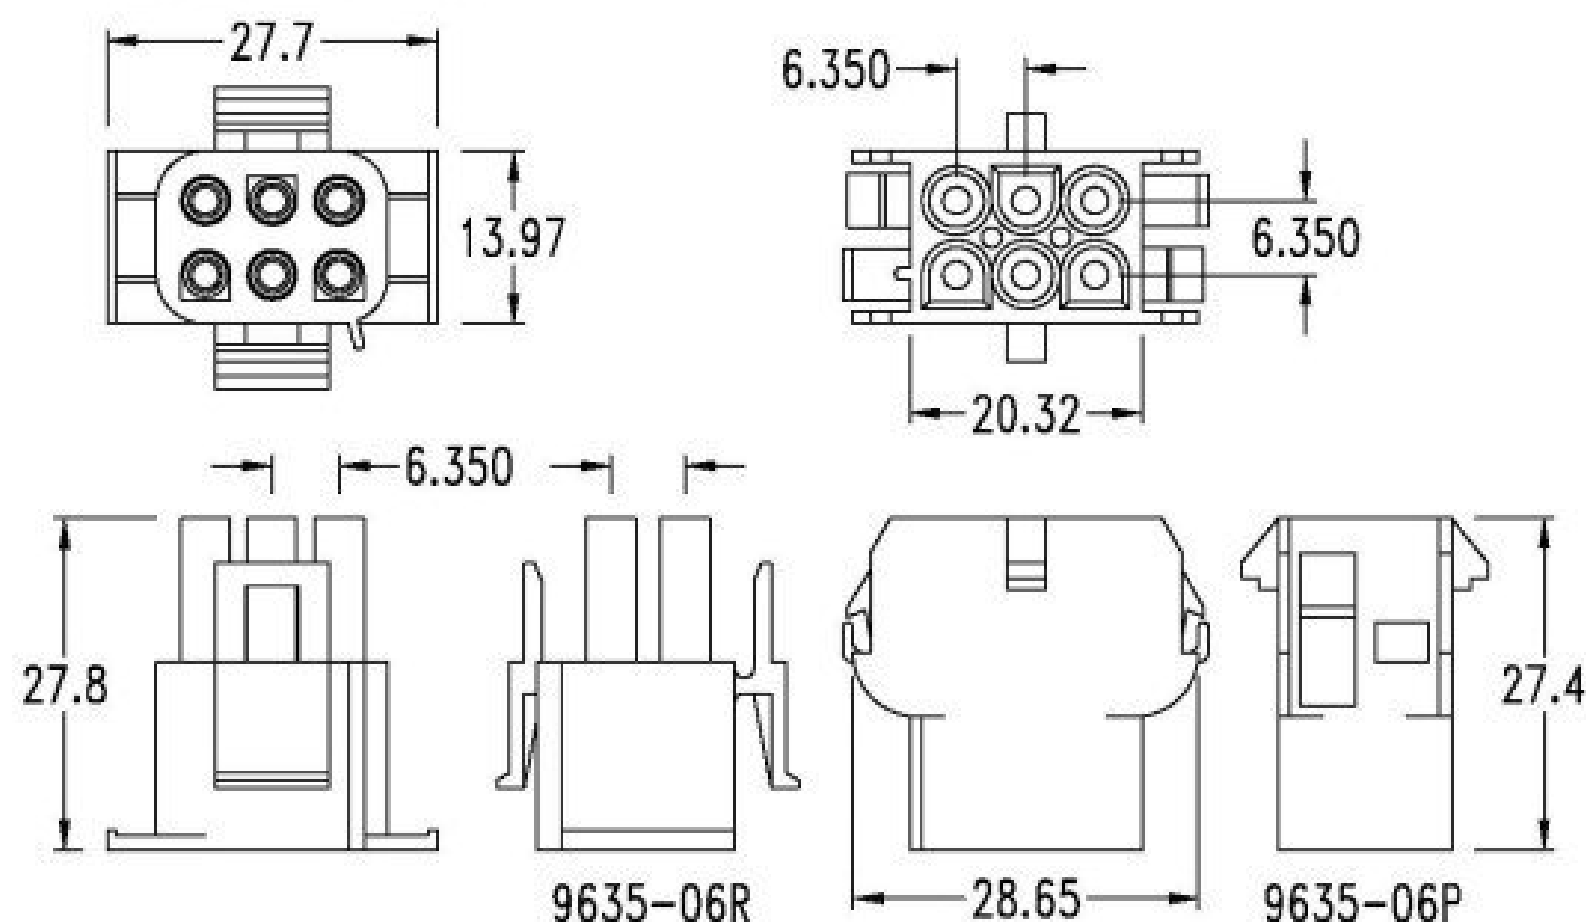

&& Panel must be punched so that housing enters panel in same direction as the punch.

S H - 9635 - XX R

P: Power Header
H: Housing
Number of Circuit
R: Receptacle
P: Plug

UNIT	mm			Secon International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
.X = ±0.4 .XX = ±0.25 .XXX = ±0.08				.25" (6.35mm) Pitch Power Connectors			
				PART NO.		9635-06 Series	
DRAWN		DATE					
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	