



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/11/30	
B	CHANGE CABLE	2016/12/09	
C	CHANGE CONNECTOR	2017/01/09	
D	CHANGE DRAWING	2017/02/06	
E	CHANGE DRAWING	2017/03/28	

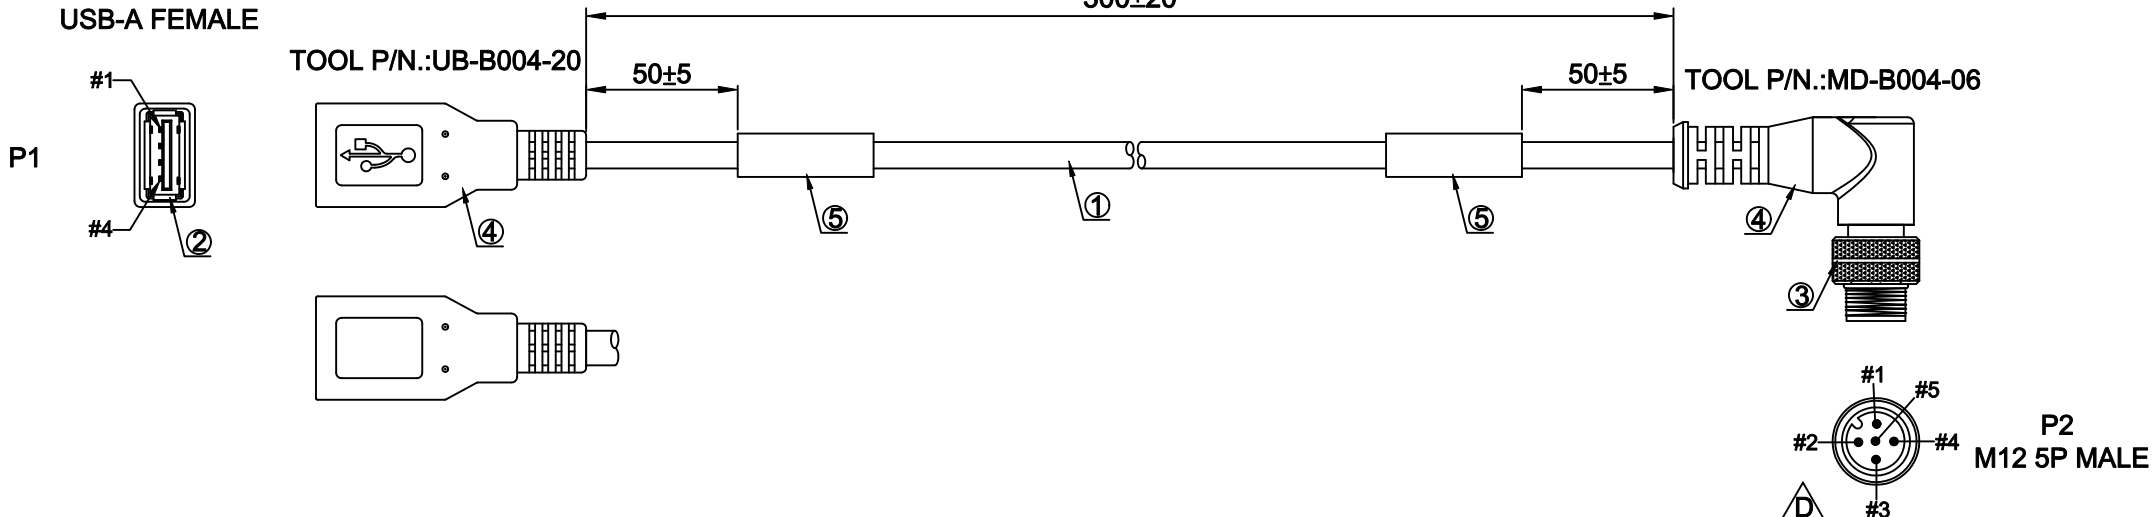

PIN ASSIGNMENT

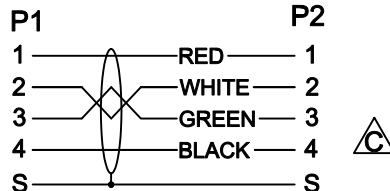

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.

5	2		LABEL.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0587 	M12 5P MALE BLACK INSULATOR SOLDER TYPE.
2	1	A0183-1/D0059	USB A FEMALE SOLDER TYPE,WHITE INSULATOR WITH MATEL CAN.
1	1	E0423 	28AWG*1P+20AWG*2C+ADB OD:5.1MM BLACK.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.			
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE			
CHECK,BY	<i>Cao jiawei</i>	REV	E	USB-A F/90° M12 5P M			
APP,BY	<i>Mr.Huang</i>	DATE	2016/11/30	TOLERANCES			
DWG NO.	SE-S-0292			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	1138-000-001			SHEET	1/2	SIZE	A4