



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2017/02/20	
B	ADD CABLE LABEL	2017/06/03	

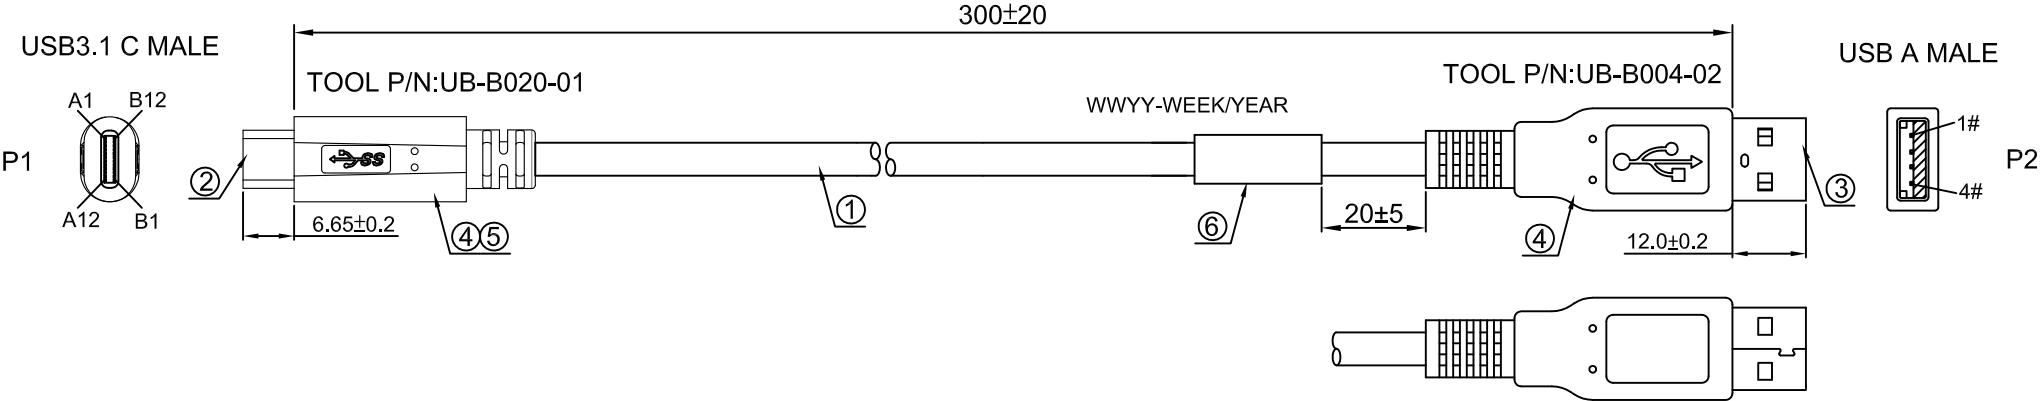

PIN ASSIGNMENT

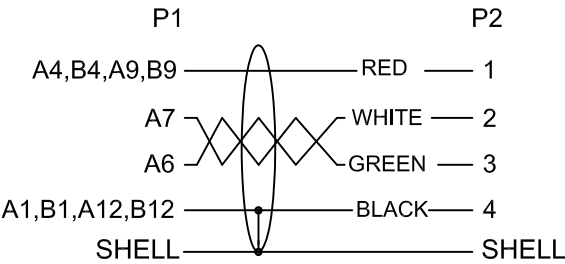

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

6	1		CABLE LABEL.
5	1	D0088	USB3.1 C TYPE MALE METAL CAN.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0182-1	USB A TYPE, MALE, WHITE INSULATOR, SOLDER TYPE.
2	1	A0909	USB3.1 C TYPE MALE SOLDER TYPE. (2.0C-1038-R1)
1	1	E0329	28AWG*1P+28AWG*2C+ADB OD:3.5MM BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE
CHECK,BY	Cao jiaowei	REV	B	USB3.1 C MALE/USB A M
APP,BY	Mr. Huang	DATE	2017/02/20	TOLERANCES
DWG NO.	SE-S-0309			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	1-00332			SHEET 1/1 SIZE A4