



RoHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2017/09/08	

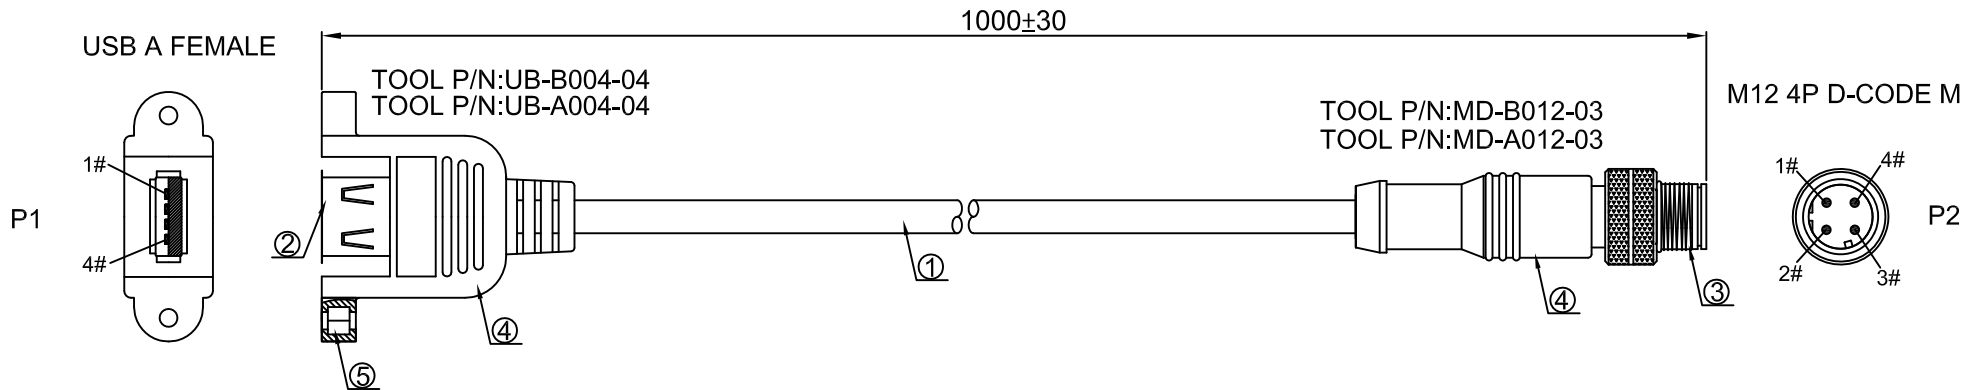

PIN ASSIGNMENT

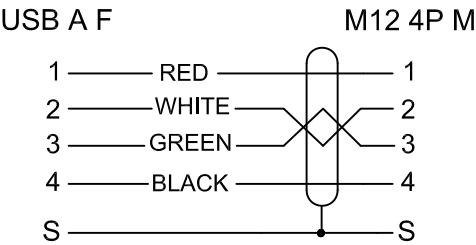

NUT DETAIL:



NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec,
 - CONTACT RESISTANCE: 3 ohm MAX.

5	2	C0399	NUT:M3.0 H4.75*3.25MM NICKEL PLATED.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0675	M12 4P D-CODE MALE BLACK INSULATOR SOLDER TYPE.
2	1	A0183-1	USB A FEMALE WHITE INSULATOR SOLDER TYPE.
1	1	E0843	28AWG*1P+24AWG*2C+ADB OD:4.5MM BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE
CHECK,BY	<i>Cao jiawei</i>	REV	A	USB A F/M12 4P M
APP,BY	<i>Mr.Huang</i>	DATE	2017/09/08	TOLERANCES
DWG NO.	SE-S-0324			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	SE-S-0324			SHEET 1/1 SIZE A4