



RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2017/09/08	

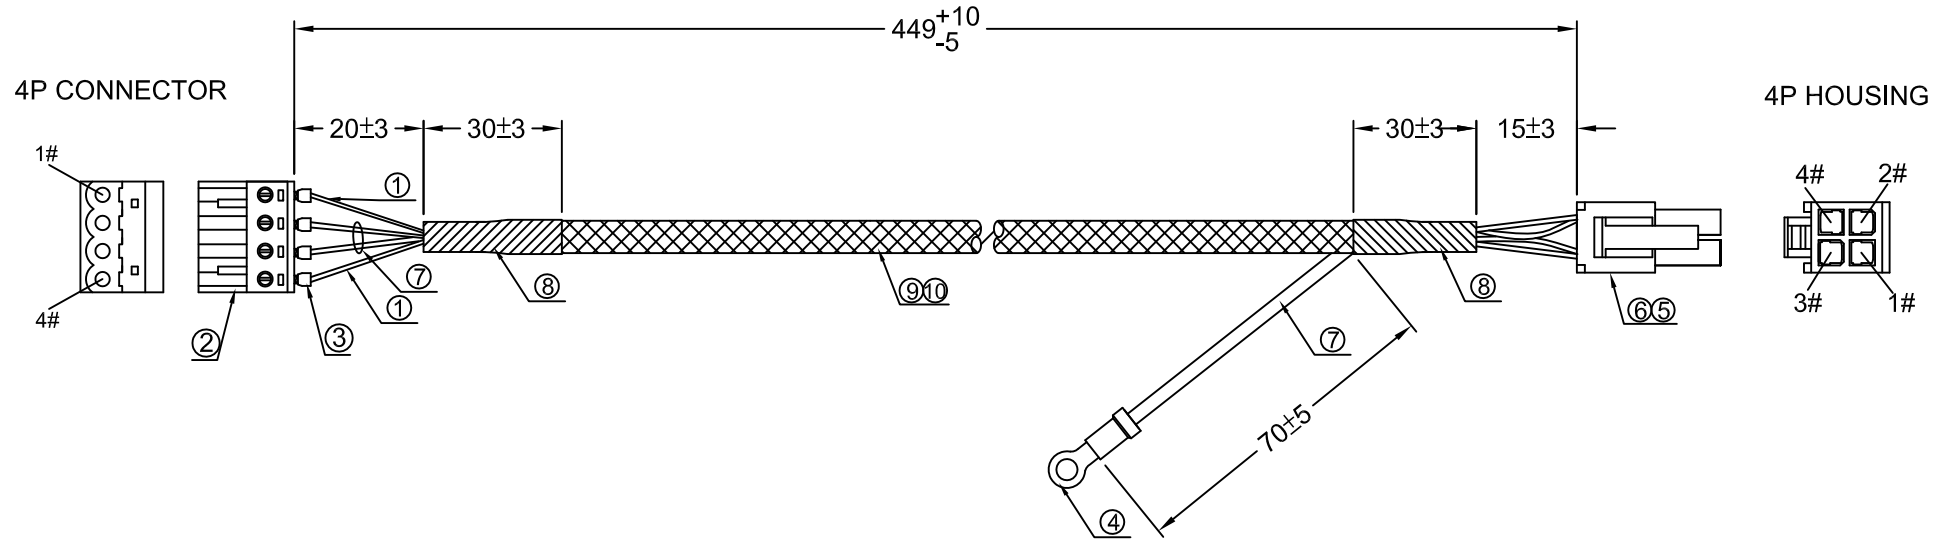

PIN ASSIGNMENT

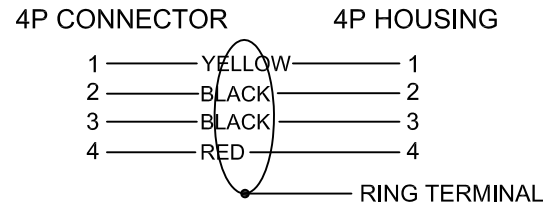

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:20 Mohm MIN,
 DC 300V 0.01sec,
 (c). CONTACT RESISTANCE:3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
10	1	N0151	BLACK NYLON BRAID.
9	1	N0233	TINNED COPPER BRAID.
8	2		DOUBLE HEAT SHRINK TUBE:BLACK.
7	3	F0056	UL1007 18AWG BLACK.
6	4	B0165	TERMINAL:TIN PLATED.
5	1	B0177	HOUSING:2*2P PITCH:4.2MM,CLEAR.
4	1	B0293	RING TERMINAL,RED.(PV18-6R OR EQ)(HRV1.25-3.7M)
3	4	B0251	CORD END TERMINAL
2	1	A0466	4 POS TERMINAL BLOCKS.
1	2	F0100/F0099	UL1007 18AWG ,YELLOW,RED.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE		
CHECK, BY	<i>Cao jiawei</i>	REV	A	4P CONNECTOR/4P HOUSING		
APP, BY	<i>Mr. Huang</i>	DATE	2017/09/08	TOLERANCES		
DWG NO.	SE-S-0325		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0325		SHEET	1/1	SIZE	A4