
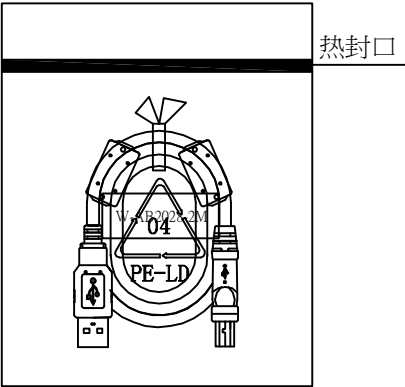


型号	模 号	變更内容	變更日期	版本
USB AM				
USB BM				


3600±60MM
3000±50MM
2000±30MM

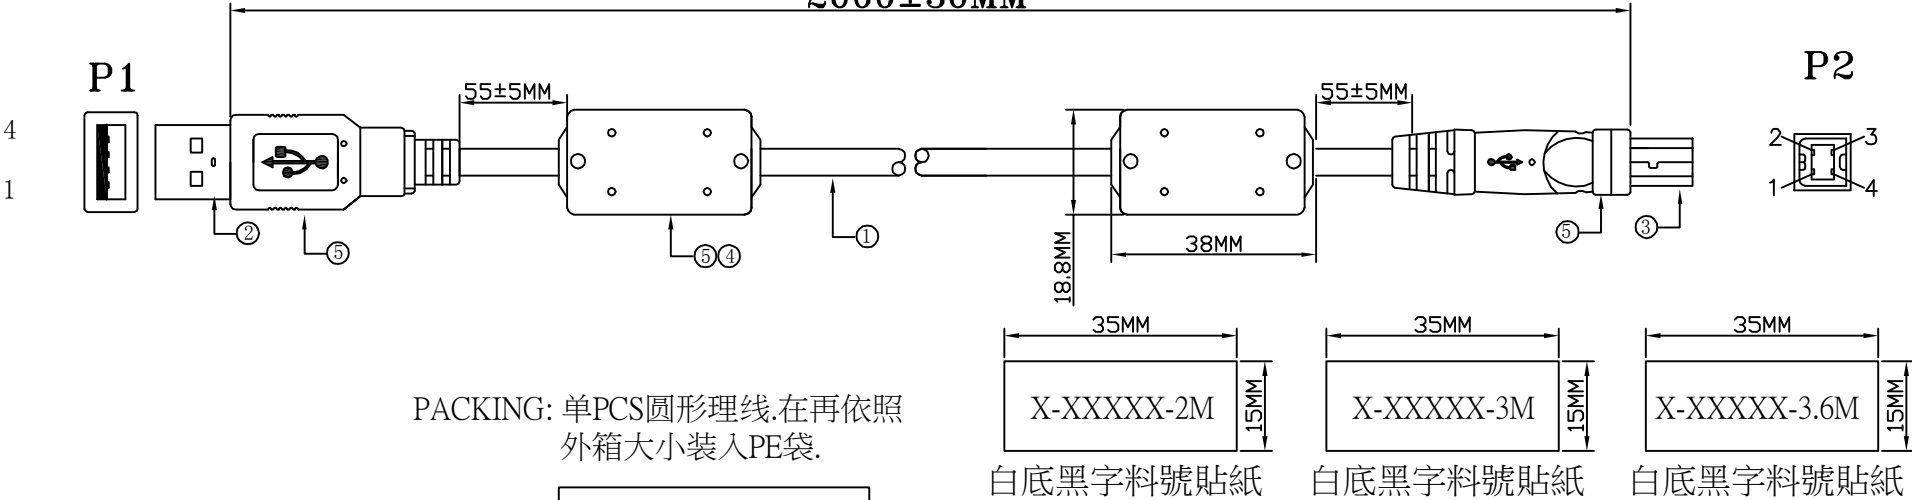

ELECTRONIC TEST:
1. 100% TEST,(Open,Short,Miss Wire).
2. Conduct Resistance: 2Ω/max.
3. Insulation Resistance: 10MΩ/min.
4. Hi-Pot: DC 300v ms.

PART LIST:本产品均符合”ROHS”环保标准, 用的材料均为相当品。

5	PVC:45P BEIGE(贝吉色)		KG/K
4	∅18.85*38MM BLACK	2	PCS
3	USB BM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE.	1	SET
2	USB AM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE.	1	SET
1	CABLE:UL2725 28AWG*1P+20AWG*2C+AB OD:5.0MM 2.0 OLOR: BEIGE(贝吉色)	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT



Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
AS DRAWING				USB A Male to USB B Male Cable Beige Color L: 2M, 3M, 3.6M			
			UNIT mm				
DRAWN	DIANA	DATE		PART NO.	SC-S-K1709-1101		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A