

RoHS Compliant

REV.	ECN NO.	DESCRIPTION	REVISER	DATE
A0		新版本	H.H.F	15-07-11

NOTE:

- MATERIALS AND FINISHED
INSULATOR : PBT+30% GF UL 94V-0,
SHELL : STEEL, NI OR SN FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED
WITH #4-40 THREADED ASSEMBLED
- ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
- HOW TO ORDER:

SDP F 1 1 1-XX X X X X P-B X D 3 0

Female

09:9PIN
15:15PIN
25:25PIN
37:37PIN

G:Gold Plating
S:Selevite Gold Bright TIN

1:1u"
2:2u"
3:3u"

1:FORNT SHELL NI
BLACK SHELL SN
4:FULL Gold
5:FULL NI

B:Black

L:LIGHT Blue





U:Dark Blue(661C)

G:Green(322C)

5:4.8*11.8 Hexagonal copper screw
6:4.8*11.8 Hexagonal iron screw

O:Not riveting
A:No screw type
B:Ass'y screw type
C:Attach screw type
D:Fork Lock

P:PBT

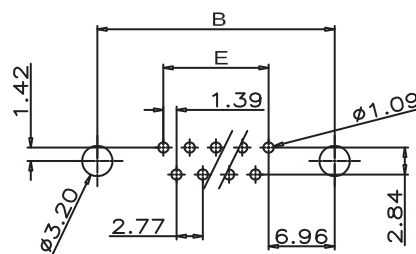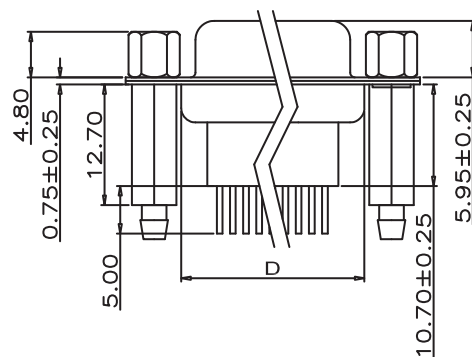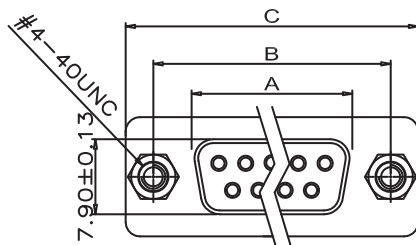

P.C.B LAYOUT

09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86
No. of Contact	A±0.25	B±0.25	C±0.38	D±0.25	E±0.25

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE				
x.	= ± 0.38	x.°	± 2.0°		D-SUB Connector Female High 180 Deg. P.C.B. Type Pin length: 5.0mm魚又開槽反向			
x.x	= ± 0.35	.x°	± 1.0°					
x.xx	= ± 0.25	.xx°	± 0.5°					
x.xxx	= ± 0.15	.xxx°	± ----					
			UNIT					
			mm					
DRAWN	HHF	DATE	2011/07/15	PART NO.	SDPF111-XXXXXXP-BXD30			
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0	