


- Poles: 2X3-2X34
- Material: Insulator: NYLON 6T UL94V-0 BLACK
- Contact: 0.50mm (.020") square pin, brass, gold plated
- Mates with CH204A, B, C series housing



Specifications

- Current rating: 1A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 5,000MΩ min.
- Withstand voltage: 800 AC/minute
- Applicable PC board thickness: .063" (1.6mm)


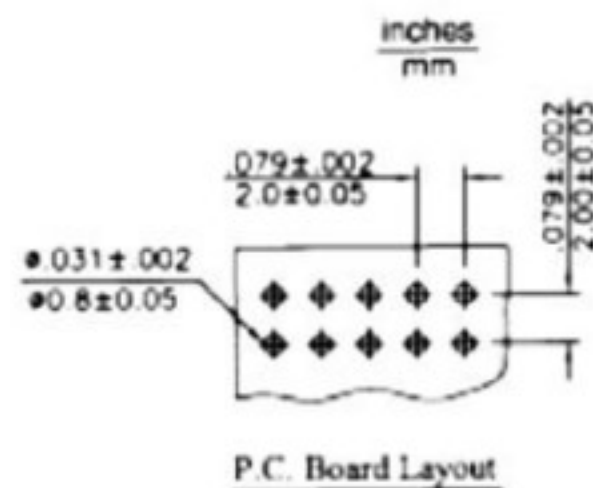


CIRCUITS	DIMENSION (inches)		
	A	B	C
6	0.157(4.00)	0.476(12.10)	0.520(13.20)
8	0.236(6.00)	0.555(14.10)	0.598(15.20)
10	0.315(8.00)	0.634(16.10)	0.677(17.20)
12	0.394(10.00)	0.713(18.10)	0.756(19.20)
14	0.472(12.00)	0.791(20.10)	0.835(21.20)
16	0.551(14.00)	0.870(22.10)	0.913(23.20)
18	0.630(16.00)	0.949(24.10)	0.992(25.20)
20	0.709(18.00)	1.028(26.10)	1.071(27.20)
22	0.787(20.00)	1.106(28.10)	1.150(29.20)
24	0.866(22.00)	1.185(30.10)	1.228(31.20)
26	0.945(24.00)	1.264(32.10)	1.307(33.20)
28	1.024(26.00)	1.343(34.10)	1.386(35.20)
30	1.102(28.00)	1.421(36.10)	1.465(37.20)
32	1.181(30.00)	1.500(38.10)	1.543(39.20)
34	1.260(32.00)	1.579(40.10)	1.622(41.20)
36	1.339(34.00)	1.657(42.10)	1.701(43.20)
38	1.417(36.00)	1.736(44.10)	1.780(45.20)
40	1.496(38.00)	1.815(46.10)	1.859(47.20)
44	1.654(42.00)	1.973(50.10)	2.016(51.20)
48	1.811(46.00)	2.130(54.10)	2.173(55.20)
50	1.890(48.00)	2.209(56.10)	2.252(57.20)
54	2.047(52.00)	2.366(60.10)	2.409(61.20)
56	2.126(54.00)	2.445(62.10)	2.488(63.20)
60	2.283(58.00)	2.602(66.10)	2.644(67.20)
62	2.362(60.00)	2.681(68.10)	2.723(69.20)
64	2.441(62.00)	2.760(70.10)	2.802(71.20)
68	2.598(66.00)	2.917(74.10)	2.959(75.20)

SBS2008 SERIES

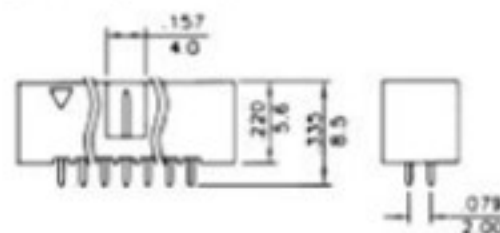

SBR2008 SERIES

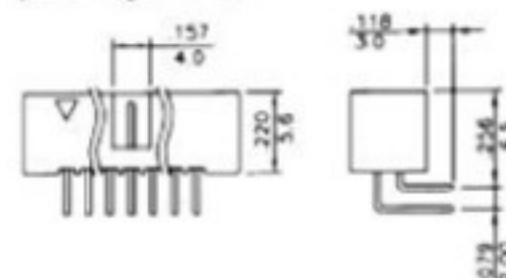

S B X - 2008 - 2 XX GF

Seconn
Box Header
S: Straight
R: Right Angle

1: Single Row
2: Dual Row

Number of Circuit

Gold Flash

UNIT	mm			Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
				.079" (2.00mm) Pitch Dual Row Box Header			
				PART NO.	SBX-2008-2XXGF		
DRAWN		DATE		SHEET	1/1	REV	
SCALE		SIZE	A4				