

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

SBS - 520-9 0- 34 G B 00
1 2 3 4 5

- 5: Normal Parts (NYLON 6T)
7: Green Product (NYLON 6T)
9: Green Product High Temp (NYLON 6T or 9T)
- No. of contacts
- G: Gold flash
T: Tin plated
- B: Black Insulator
- Pinrex internal code.

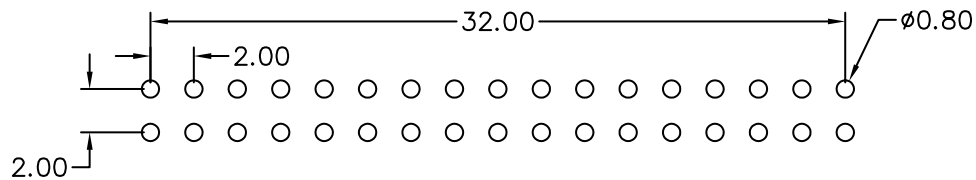

Recommended P.C.B Layout

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.30 x.xx = ± 0.20 Angles ± 3° x.xxx = ± -----				Box Header 2.0x2.0mm Straight Type 34 Pin			
			UNIT				
			mm				
DRAWN	Anny	DATE	2006/11/15	PART NO.	SBS-520-90-34GB00		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A