


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2018/03/06	
B	CHANGE HOUSING	2018/03/28	
C	CHANGE DRAWING	2018/03/30	

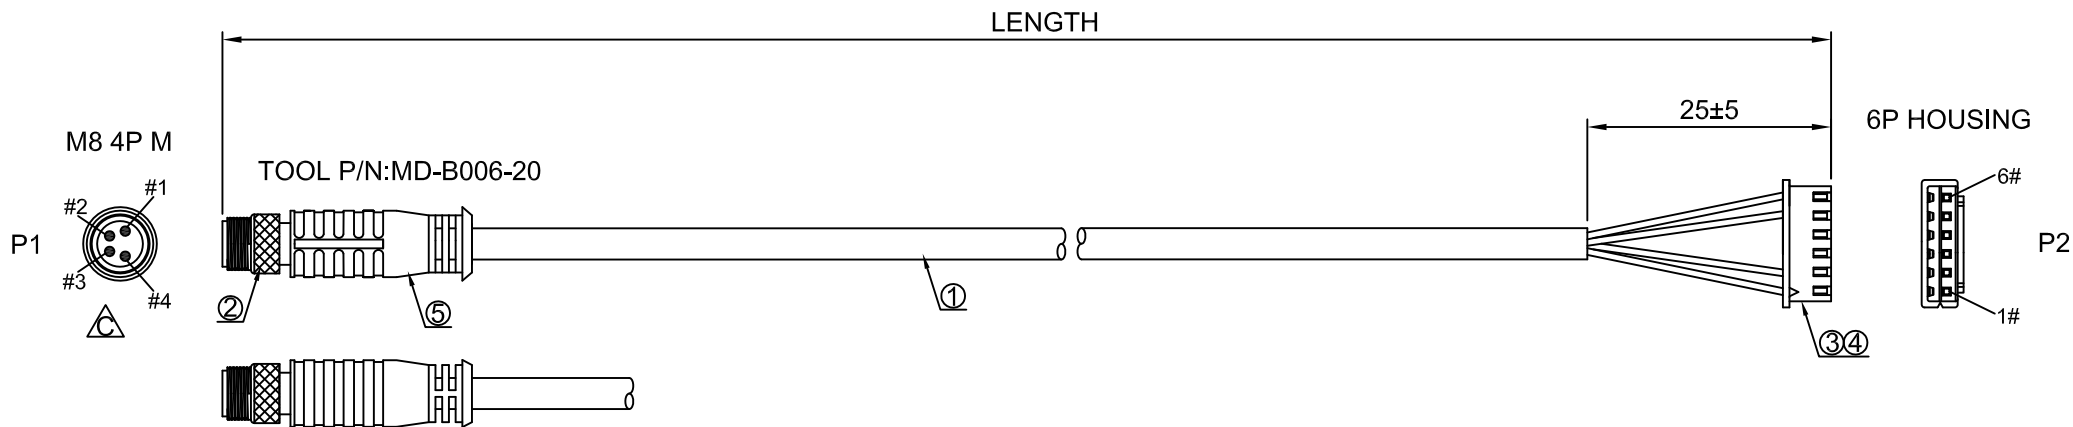

PART NO.	LENGTH
SL000252	195±20
SE-S-0344-0.3M	300±20
SE-S-0344-0.605M	605±25

PIN ASSIGNMENT

M8 4P M	6P HOUSING
1	1
2	2
3	5
4	6

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3 ohm MAX.

5		G0061	ALL CONNECTORS OVERMOLD BLACK PUR.
4	4	B0465	TERMINAL:PITCH2.5MM TIN PLATED.
3	1		HOUSING:6P PITCH2.5MM.(XHP-6)
2	1	A0597	M8 4P MALE BLACK INSULATOR SOLDER TYPE
1	1	E1030	22AWG*4C OD:4.4MM BLACK PUR JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK,BY	Caojiawei	REV	C	M8 4P M/6P HOUSING	
APP,BY	Mr.Huang	DATE	2018/03/06	TOLERANCES	
DWG NO.	SE-S-0344	X.= ±		.X= ±	.XX= ±
PART NO.		SHEET		1/1	SIZE A4