


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2018/03/06	
B	CHANGE HOUSING	2018/03/28	
C	CHANGE DRAWING	2018/03/30	

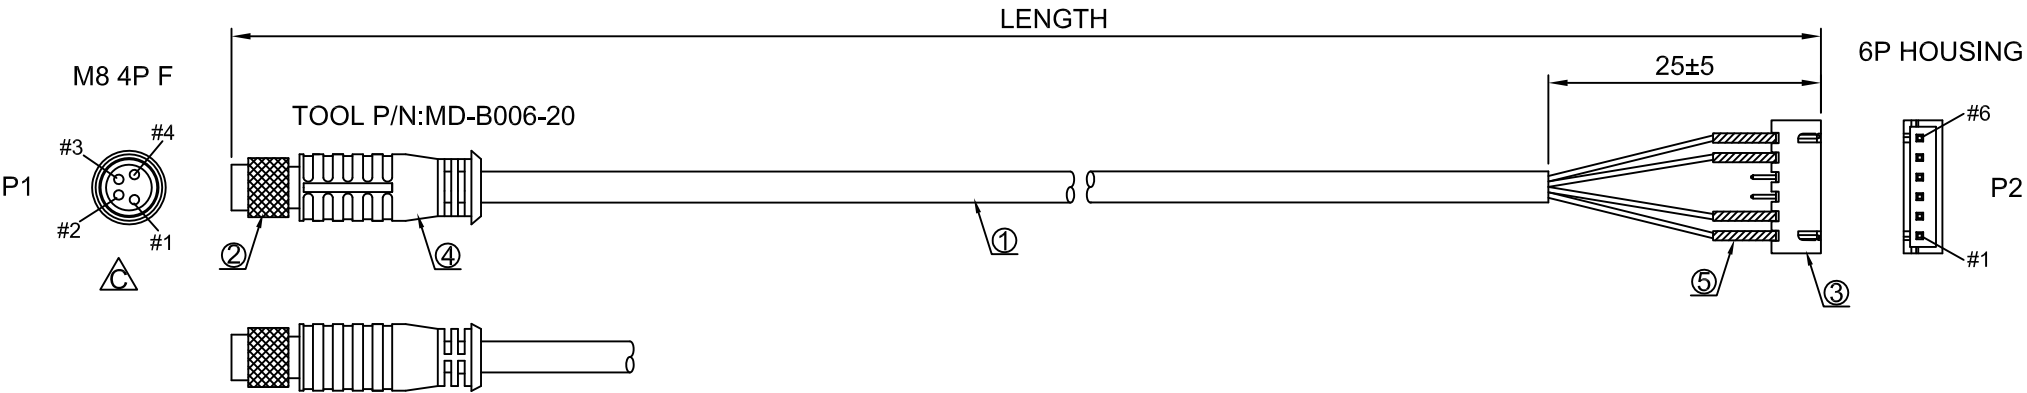

PIN ASSIGNMENT

M8 4P F	6P HOUSING
1	1
2	2
3	5
4	6

PART NO.	LENGTH
SE-S-0343-0.195M	195±20
SE-S-0343-0.3M	300±20
SL000253	605±25

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
(a).100%OPEN,SHORT & MISWIRE TEST,
(b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
(c). CONTACT RESISTANCE:3 ohm MAX.

5	4		BLACK HEAT SHRINK TUBE.
4		G0061	ALL CONNECTORS OVERMOLD BLACK PUR.
3	1		HOUSING:6P PITCH2.5MM.[B6B-XH-A(LF)(SN)]
2	1	A0681	M8 4P FEMALE BLACK INSULATOR SOLDER TYPE.
1	1	E1030	22AWG*4C OD:4.4MM BLACK PUR JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE		TITLE			
CHECK,BY	Caojiawei	REV	C		M8 4P F/6P HOUSING			
APP,BY	Mr.Huang	DATE	2018/03/06		TOLERANCES			
DWG NO.	SE-S-0343				X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.					SHEET	1/1	SIZE	A4