


NO	REVISION	REV
1	FIRST ISSUE RECORD	A

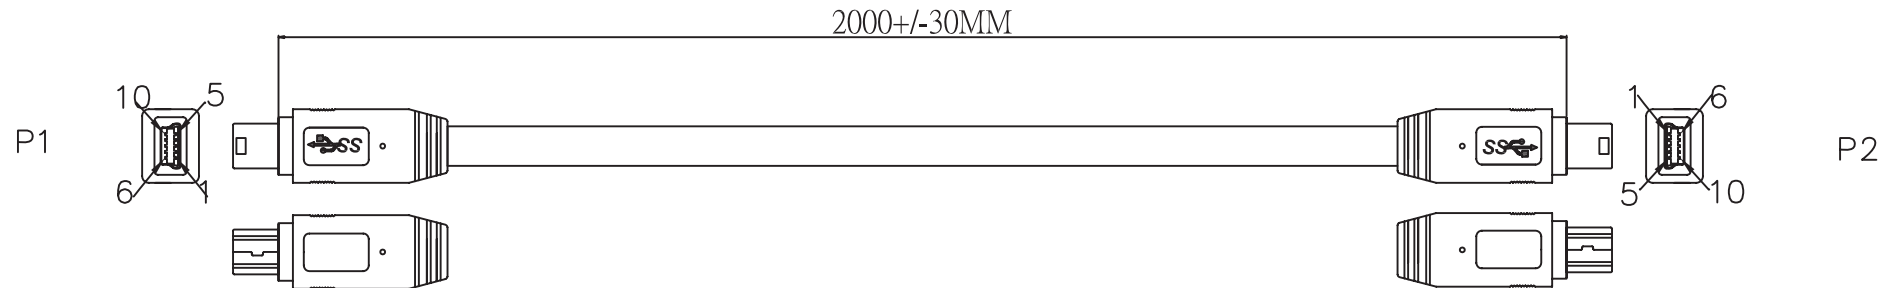

NOTES:

- CABLE: UL 20276 USB3.0 CABLE, [30#×1PR(GREEN, WHITE)+24#×2C(RED, BALCK)+(30#×1P+DRAIN+AL FOIL+MYLAR)*2(YELLOW, BLUE; ORANG, PURPLE)] +AL FOIL+BRAID, BLACK PVC JACKET, OD: 5.5± 0.15mm, MUST BE MARKED: "USB 3.0".
- CONNECTOR: P1:USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE INSULATION, GOLD PLATED CONTACTS, SHELL NICKEL PLATED, P2:MINI USB 10P MALE, SOLDER TYPE,WITH PCB BLACK INSULATION,GOLD PLATED CONTACTS, SHELL NICKEL PLATED,
- HOOD: OVERMOLD USE BLACK 45P PVC.
- ALL MATERIALS ARE ROHS COMPLIANT.
- TESTING: ALL PRODUCTS MUST BE 100% TESTED AT:
COND: 5 Ω
INS: 10M Ω
HI-V: DC 300V 0.01SEC
- PACKING: EACH CABLE IN A CLEAR PE BAG.

PIN OUT	
P1	P2
1	1 (RED)
2	2 (WHITE)
3	3 (GREEN)
4	4 (BLACK)
5	5
6	6 (BLUE)
7	7 (YELLOW)
8	8 (DRAIN)
9	9 (PURPLE)
10	10(ORANGE)
SHELL	SHELL(BRAID)

Se Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
AS DRAWING				USB3.0 Mini USB 10 Pin to Mini USB 10 Pin Male Cable			
			UNIT				
			mm				
DRAWN	YUAN TAO	DATE		PART NO.	SC-S-S1805-1801		
SCALE		SIZE	A4	SHEET	1/1	REV	A