



RoHS COMPLIANT

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2018/07/16	

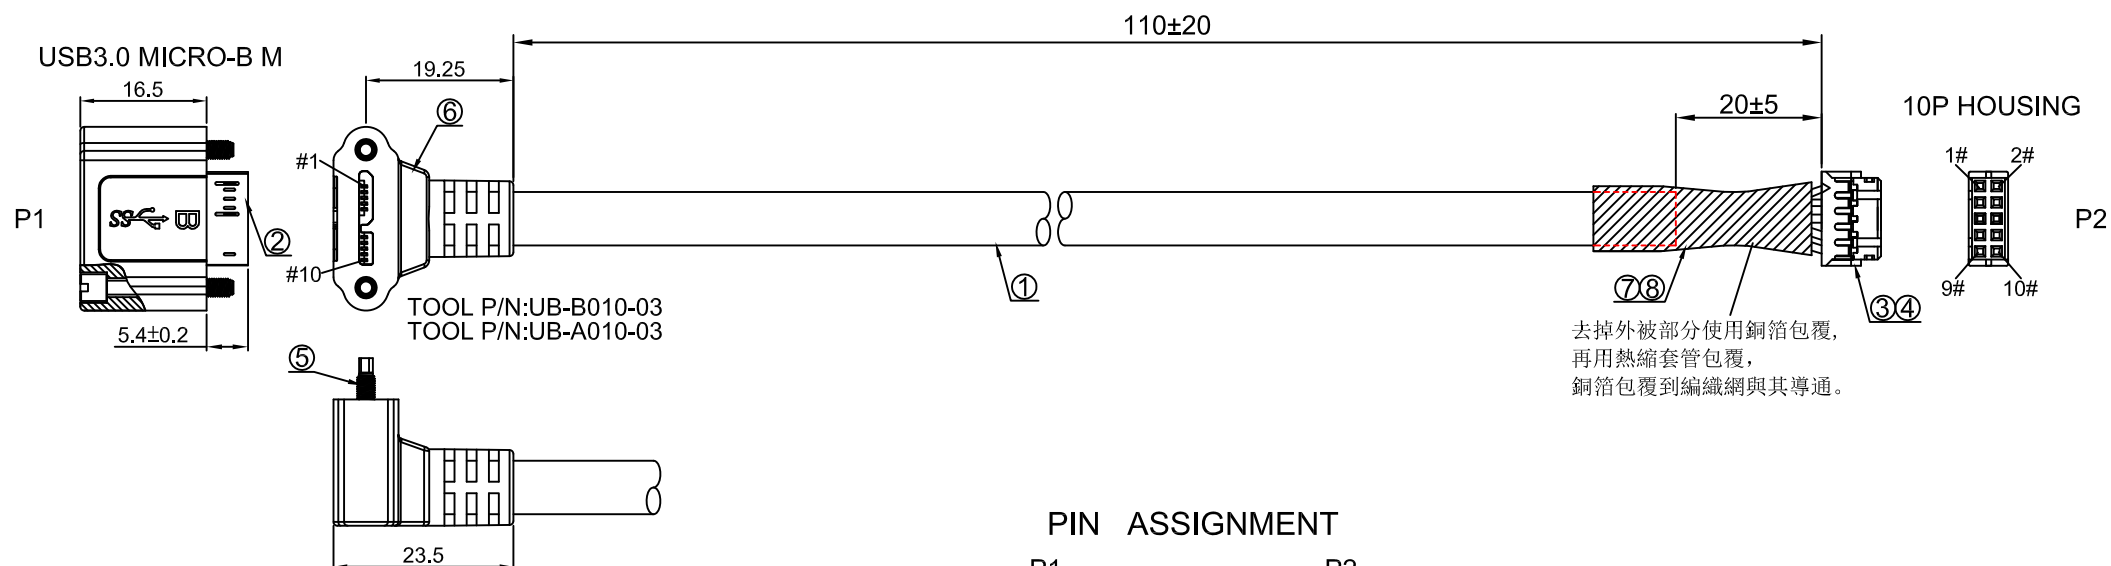

PIN ASSIGNMENT

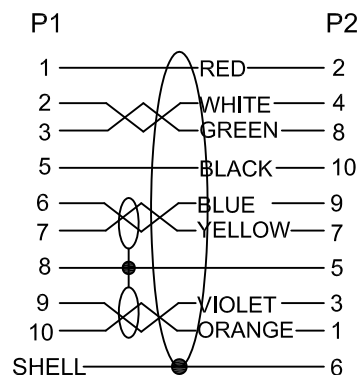

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm MAX.

8	1		BLACK HEAT SHRINK TUBE.
7	1		COPPER FOIL.
6		G0027	ALL CONNECTORS OVERMOLD VIOLET PVC.
5	2	C0413	SCREW:M2 OD:3.5*19.8MM NICKEL PLATED.
4	10	B0024	TERMINAL:PITCH2.0MM TIN PLATED.
3	1	B0059	HOUSING:10P PITCH2.0MM WHITE.
2	1	A0674	USB3.0 MICRO-B,MALE,BLUE INSULATOR, SOLDER TYPE.
1	1	E1003	(26AWG*1PAIR+EAM+S+FEP TAPE)*2PCS+ (26AWG*1PAIR+A)+24AWG*2C+AS+FEP TAPE, OD:7.0MM VIOLET PVC JACKET,UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK,BY	Caojiawei	REV	A	USB3.0 MICRO-B M/10P HOUSING	
APP,BY	Mr.Huang	DATE	2018/07/16	TOLERANCES	
DWG NO.	SE-S-0357			X.= ±	.X= ± .XX= ± .XXX= ±
PART NO.	SE-S-0357			SHEET	1/1 SIZE A4