



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2018/08/27	

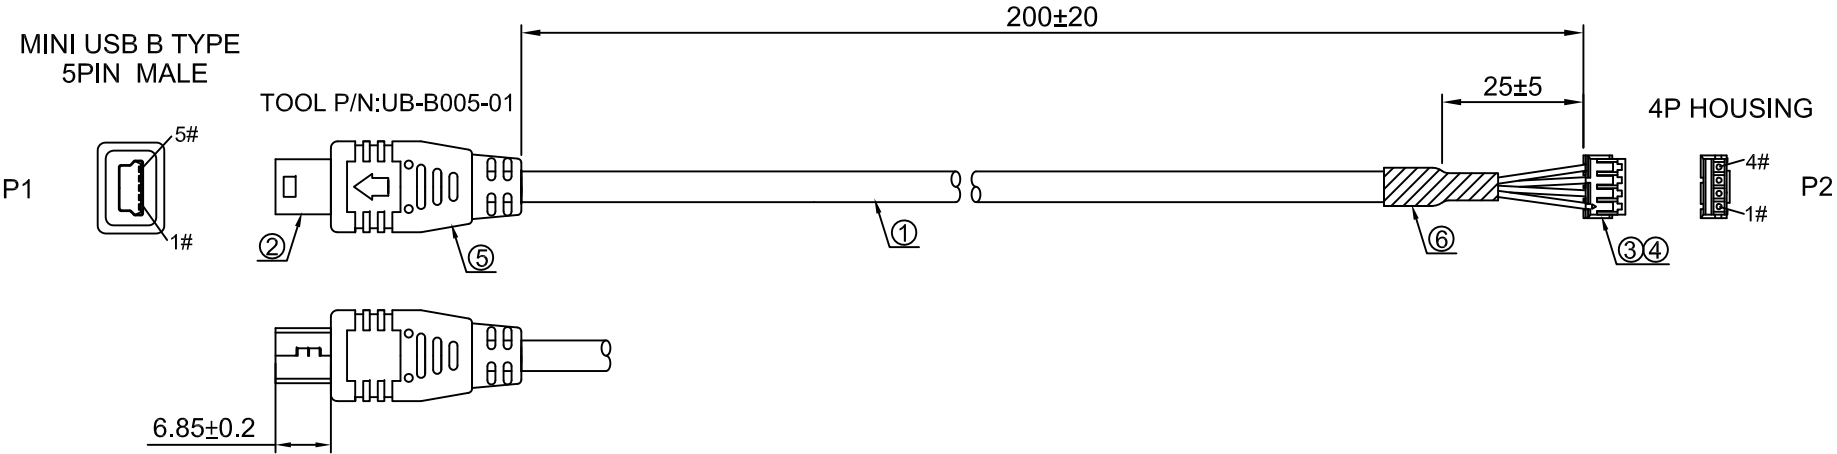

PIN ASSIGNMENT

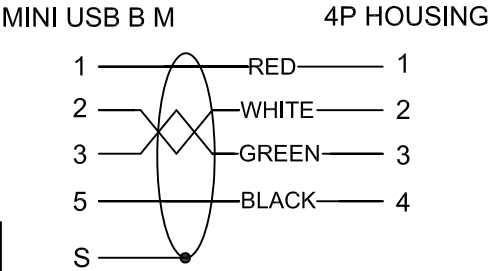

- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
(a).100%OPEN,SHORT & MISWIRE TEST,
(b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
(c). CONTACT RESISTANCE:3ohm MAX.

6	1		BLACK HEAT SHRINK TUBE.
5		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
4	4	B0291	TERMINAL:PITCH1.5MM TIN PLATED.
3	1	B0289	HOUSING:4P PITCH1.5MM WHITE.
2	1	A0824	MINIUSB B TYPE 5P MALE,SOLDER TYPE,BLACK INSULATOR.
1	1	E0329	28AWG*1PAIR+28AWG*2C+ADB, OD:3.5mm BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Cao jiawei	REV	A	MINI USB B M/4P HOUSING				
APP,BY	Mr.Huang	DATE	2018/08/27	TOLERANCES				
DWG NO.	SE-S-0361			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0361			SHEET	1/1	SIZE	A4	