

RoHS COMPLIANT


Item	项目	Specification	规格值
NO. of conductors	导体芯数 N		40
Pitch	间距 P		0.5±0.05
Total Pitch	全间距 PT		19.5±0.07
Total Length	总长度 L		100±2
Insulation Length	绝缘长度 IL		98.4±2
Margin Width	边缘宽度 M/MI		0.5±0.07
Total Width	总宽度 W		20.5±0.07
Strip Length	线口长度 S1		0.8±0.3
Strip Length	线口长度 S2		0.8±0.3
Reinforeing tape length	补强板长度 Bl		/
Reinforeing tape length	补强板长度 B2		/
Slanting	线口倾斜度 A		≤0.3
Over lap	冲孔 A1		≤0.5
Terminal thickness	插入厚度 t		/
Thickness insulation	线身厚度 t1		0.121±0.05
Conductor thickness	导体厚度 Ct		0.035±0.005
Conductor width	导体宽度 Cw		0.3±0.03
Supporting Tapc Color	补强板颜色		蓝色(Blue)
PET(Supporting Tapc Color)	补强板规格		/
PET(Insulation)	绝缘胶规格		0.043mm 20706 印字
PET(Insulation)	绝缘胶规格		0.043mm 105° C 白色
Rev	版本		A

Storage condition ((储存条件) : Recommended(推荐)

Temp:15°C~25°C((温度15°C~25°C)Humi di ty: 30~60RH%(湿度30~ 60RH%)

DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2018/11/14	

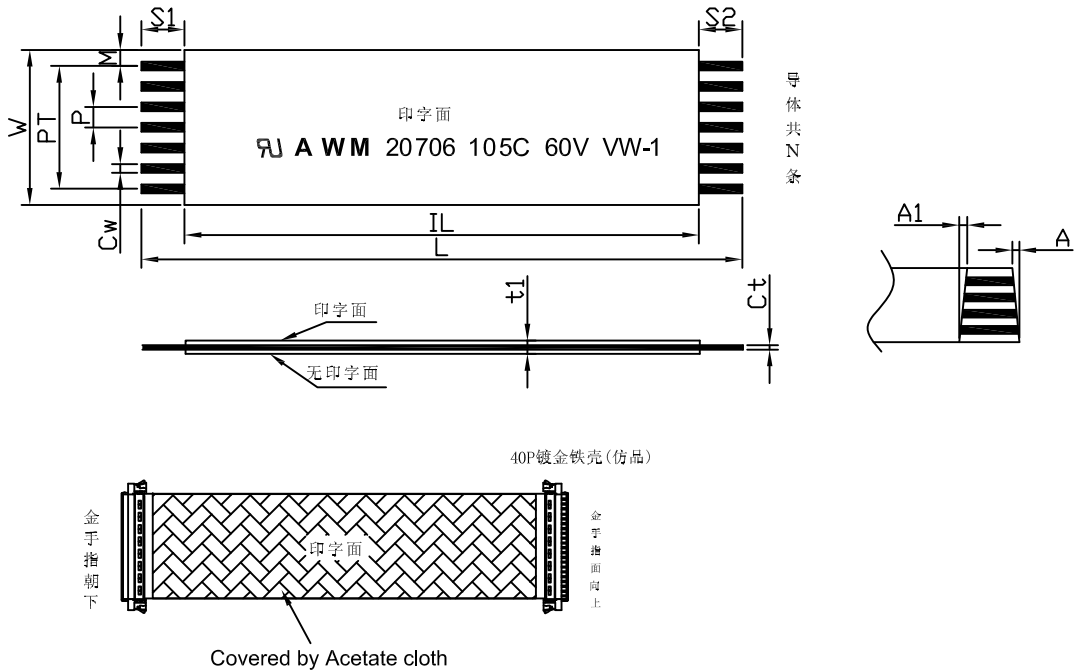

Remark:

1. Mind the tolerance of soldering and direction and cleanness of the metal shell plug.
2. Use 40pin metal shell plug(similar to I-PEX20453-040T/ZYB0502HB-40P)
3. Wire with conductive fabric are used for shielding.

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE
CHECK,BY	Bao jiawei	REV	A	FFC CABLE
APP,BY	Mr.Huang	DATE	2018/11/14	TOLERANCES
DWG NO.	SE-S-0369			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	SE-S-0369	SHEET	1/1	SIZE A4